



aerospace  
climate control  
electromechanical  
filtration  
fluid & gas handling  
hydraulics  
pneumatics  
process control  
sealing & shielding



## Energy Products Division - Multitube®

Instrument and Heat Trace Tubing Products



ENGINEERING YOUR SUCCESS.

## Parker Hannifin, Energy Products Division – World Leader In Bundled Tubing Products

The Energy Products Division offers an extensive selection of bundled hose and tubing products, along with fittings and accessory for specific fluid-handling applications involving numerous industries and markets.

Energy Products Division Headquarters in Stafford, Texas, houses manufacturing, marketing, customer service, engineering, R&D, quality control and training. Additional manufacturing locations reside in Ravenna, Ohio, Ortona, Italy, Freeport, Texas, Asker, Norway, Tonsberg, Norway and Stavanger, Norway.



Together with our global distribution network throughout the world, we can be connected to your business within moments.

### **WARNING**

FAILURE OR IMPROPER SELECTION OR IMPROPER USE OF THE PRODUCTS AND/OR SYSTEMS DESCRIBED HEREIN OR RELATED ITEMS CAN CAUSE DEATH, PERSONAL INJURY AND PROPERTY DAMAGE.

This document and other information from Parker Hannifin Corporation, its subsidiaries and authorized distributors provide product and/or system options for further investigation by users having technical expertise. It is important that you analyze all aspects of your application and review the information concerning the product or system in the current product catalog. Due to the variety of operating conditions and applications for these products or systems, the user, through its own analysis and testing, is solely responsible for making the final selection of the products and systems and assuring that all performance, safety and warning requirements of the application are met.

The products described herein, including without limitation, product features, specifications, designs, availability and pricing, are subject to change by Parker Hannifin Corporation and its subsidiaries at any time without notice.

### **Offer of Sale**

The items described in this document are hereby offered for sale by Parker Hannifin Corporation, its subsidiaries or its authorized distributors. This offer and its acceptance are governed by the provisions stated in the "Offer of Sale".

## Section 1 — Chemical Processing & Refineries ..... 2

- Temptube®—Single Tube Insulated ..... 2
- Steam Trace—LT Series Light Trace ..... 6
- Steam Trace—HT Series Heavy Trace ..... 10
- Electric Trace—Self-Regulating ..... 17



## Section 2 — Power Generation ..... 35

- Intermittent High Temperature Steam Purge- Freeze Protection ..... 35
- Continuous High Temperature Steam Purge- Freeze Protection ..... 38



## Section 3 — Process Control and Environmental Monitoring Systems .. 41

- Analyzer Bundles ..... 55
- Probe Support ..... 55
- Constant Watt - Low Temperature Maintenance ..... 41
- Constant Watt - High Temperature Maintenance ..... 46
- Mineral Insulated - High Temperature Maintenance ..... 51



## Section 4 — Industrial Plant - Robotics - Laboratory ..... 59












- Multiple Plastic tube Bundles ..... 63
- Multitube®-Metal ..... 61
- Single Metal Tube – Jacketed ..... 60
- Armored Bundles ..... 63













## Section 5 — General Technical Data ..... 65

- Plastic Tubing Pressure and Chemical Compatibility Chart ..... 65
- Metal Tubing Pressure and Chemical Compatibility Chart ..... 68
- Jacket Material Selection Chart ..... 71
- Seamless Tubing Length Chart and Physical Data ..... 72
- Safety Guide ..... 76

Accessories	
- RTV End Sealant..... 14	- Heat Shrink Boots ..... 34
- Enclosure Feed Through..... 34	- End Seal Boot ..... 14
- Seal Patch Kits..... 14	- Self-Regulating Power Kit ..... 32
- Temperature Controllers..... 33	- Constant Watt Power Kit ..... 57

SYMBOL	DEFINITION
	Armor O.D.
	Heat Loss
	Heat Gain
	Horizontal/Vertical Support Centers
	Insulation Thickness
	Jacket Thickness
	Maximum Circuit Length
	Maximum Pulling Tension
	Minimum Bend Radius
	Mounting Thread Size
	Nominal Product O.D.

SYMBOL	DEFINITION
	Nominal Throat Diameter
	Number of Tubes
	R-Factor
	Part Number
	Process Tube O.D.
	Product Weight
	Shipping Weight
	Slope
	Spacing
	Tracer Tube O.D.

## Section 1

## Temptube® Preinsulated Tubing



### Introduction:

Parflex Temptube® Preinsulated tubing is thermally insulated with a non-hygroscopic inorganic fiberglass material and protected with a flexible black flame-resistant PVC jacket.

### Performance Data:

Parflex standard Temptube® is thermally insulated for transfer of fluids or gases up to 400°F (204°C) while maintaining an outer jacket surface temperature of 140°F (60°C), meeting NEC Personnel Protection Code 427.12.

Insulated bundles rated up to 1200°F (649°C) are available upon request. Contact Parker Hannifin for more details.

Tubing is available in many alloys and sizes, including metric size. See "How to Order" for specifying part numbers to meet your application.

### General:

Parker Temptube® is designed to provide an economical and highly efficient method of conveying steam or other hot materials through a plant and is intended to replace hard piping and field-installed insulation.

### Applications:

The Temptube® products are typically used in steam supply lines, condensate return lines, cooling water lines, lubrication lines, refrigeration lines, and liquid nitrogen lines.

### Tubing:

Type 122 DHP Seamless Copper and 316/316L Welded and Seamless Stainless Steel are standard. Additional materials and wall thicknesses are available upon request. For material specification of metal tubing, see technical data section of the catalog. Consult Division for details.

### Insulation:

Air-spaced, cross wrapped applied non-hygroscopic fiberglass thermal insulation for minimum heat loss. Optional insulation thicknesses are available; such as, 0.36", 0.72" and 0.96" insulation used in Cryogenic, Liquid CO<sub>2</sub> and Liquid Nitrogen applications, see Performance Chart for heat gain rates. For other thicknesses consult factory.

### Jacket:

The tough, black, 105°C rated, flame-resistant PVC (FR PVC) jacket protects the tubing against corrosive atmospheres, water, oils, acids, alkalis and most chemicals. Additional jacket materials are available upon request. For jacket material specifications, see the Technical Data section of the catalog. Consult Division for additional details.

### Testing:

Each tube in every length of Parker Temptube® is pressure tested prior to shipment to assure the instrument engineer a high quality, reliable, trouble-free product. For Testing Specifications, see Technical Data Section of the catalog.

### Accessories:

Accessories are available for connecting multiple lengths of Temptube bundles and sealing bundle ends.

**NOTE:** It is absolutely necessary to seal the ends against contamination from moisture and/or corrosive liquids. Parker Hannifin cannot assume any liability for product damage caused by moisture from unsealed ends.

## How To Specify & Order

### TT— Temptube, Single Tube Preinsulated Bundle.

Maximum Internal Exposure up to 400°F\* (204°C)

**TT - 2 08 35 - V B**








TT	Bundle Type	2	Process Tube Material	08	Process Tube Size	35	Process Tube Size
	TT= Temptube Single Tube Insulated and Jacketed		1= Smls Copper Type DHP Alloy No 122. ASTM B68/B75 2= Welded Stainless Steel Type 316/316L ASTM A269 3= Welded Stainless Steel Type 304 ASTM A269 B=Smls 316/316L ASTM A269 C= Smls 304 ASTM A269 D= Smls Monel Type 400 E= Smls Hastelloy C22 H= Smls 316H ASTM A213 I = Smls Incoloy 825 L= Electropolish Smls 316/316L ASTM A 269 (10Ra Max) M= Smls 316/316L ASTM A213 S= Silco Smls 316/316L ASTM A269 P= PFA Fluoropolymer F= FEP Fluoropolymer T= TFE Fluoropolymer 7= Parflex 919 PTFE SS Braided Hose 9= Customer Specified Tube Material		<b>O.D.</b> See Selection Charts Imperial 02=1/8" 03=3/16" 04=1/4" 05=5/16" 06=3/8" 07=7/16" 08=1/2" 10=5/8" 12=3/4" 16=1" Metric MA=2mm MB=4mm MC=6mm MD=8mm ME=10mm MF=12mm MG=14mm MH=16mm		<b>Wall Thickness</b> See Selection Charts Imperial 16=.016" 20=.020" 28=.028" 30=.030" 31=.031" 32=.032" 35=.035" 40=.040" 47=.047" 49=.049" 50=.050" 62=.062" 65=.065" 83=.083" Metric 89=.89mm 10=1.0mm 15=1.5mm 20=2.0mm 25=2.5mm

V	Jacket Material	B	Jacket Color
	V=FR-PVC T=FR-TPE U=FR-PUR P=PUR R=TPR E=FRPE L=LDPE F=PVDF		N=Black, B=Blue G=Green O=Orange Y=Yellow P=Purple R=Red W=White
	Note: Parflex standard jacket material is FR-PVC		Note: Parflex standard color jacket is black

Note: For standard black FR-PVC jacketed products the -VN may be dropped.









**Physical Data§**

Part Number  #	Tubing Size (in.)			Insulation** Thickness (in.) 	Jacket Thickness (in.) 	Nominal Product O.D. (in.) 	Minimum Bending Radius (in.) 	Maximum Pulling Tension (lbs.) 	Product Weight (lbs./ 100ft.) 	Horizontal/ Vertical Support Centers (ft.) 
	Material	O.D.	Wall							
TT-10430	Copper	1/4	0.030	0.20	.08	.81	8	150	21.6	5
TT-10632	Copper	3/8	0.032	0.24	.08	1.01	10	250	31.7	6
TT-10835	Copper	1/2	0.035	0.24	.08	1.14	12	350	40.8	8
TT-10649	Copper	3/8	0.049	0.24	.08	1.01	10	250	37.8	6
TT-10849	Copper	1/2	0.049	0.24	.08	1.14	12	350	47.9	8
TT-20435	Welded Stainless Steel	1/4	0.035	0.20	.08	.81	8	250	21.7	6
TT-20635	Welded Stainless Steel	3/8	0.035	0.24	.08	1.01	10	400	31.1	7
TT-20835	Welded Stainless Steel	1/2	0.035	0.24	.08	1.14	12	550	38.5	8
TT-20849	Welded Stainless Steel	1/2	0.049	0.24	.08	1.14	12	550	44.8	8
TT-B0435	Seamless Stainless Steel	1/4	0.035	0.20	.08	.81	8	250	21.7	6
TT-B0635	Seamless Stainless Steel	3/8	0.035	0.24	.08	1.01	10	400	31.1	7
TT-B0835	Seamless Stainless Steel	1/2	0.035	0.24	.08	1.14	12	550	38.5	8
TT-B0849	Seamless Stainless Steel	1/2	0.049	0.24	.08	1.14	12	550	44.8	8

§All values are nominal. Dimensional data to be used as reference only. \*Available with .049" wall copper tubing.

\*\*Optional insulation thicknesses are available. For other thicknesses consult factory.










**Performance Characteristics**

Steam Pressure and Temperature			50 PSIG @ 298°F		80 PSIG @ 329°F		100 PSIG @ 338°F		120 PSIG @ 350°F		150 PSIG @ 366°F		230 PSIG @ 400°F	
Ambient Temperature			80°F		80°F		80°F		80°F		80°F		80°F	
Tube O.D. (in.)	Nominal Product O.D. (in.)	Insul. Thick (in.)	Heat Loss 	Jacket temp	Heat Loss 	Jacket temp	Heat Loss 	Jacket temp	Heat Loss 	Jacket temp	Heat Loss 	Jacket temp	Heat Loss 	Jacket temp
1/4	.81	.20	28.5	120	31.9	125	33.7	128	35.3	130	37.4	133	41.8	139
3/8	1.015	.24	33.6	118	37.6	122	39.8	125	41.6	127	44.1	130	49.3	136
1/2	1.14	.24	40.4	121	45.3	125	47.8	128	50.1	130	53.0	133	59.3	140

\*Heat loss is measured in Btu/Hr., per linear foot of tubing §Jacket temperature measured at the surface in °F.

NOTE: The performance figures presented above have been calculated to be used as a guide only. Actual performance may vary with individual plant conditions.

## Performance Characteristics

Part Number  #	Tubing		Insulation** Thickness (in.) 	Jacket Thickness (in.) 	Nominal Product O.D. (in.) 	Heat Gain/Loss Rates & R-factors at 70° F ambient					
	Size (in.)					Process, LN2 = -320°F		Process, Liquid CO2 = -70°F		Process, Steam = 400°F	
	O.D.	Wall				Heat Gain Rate, (BTU/hr) ft 	R=factor, °F/ (BTU/ hr) ft 	Heat Gain Rate, (BTU/hr) ft 	R=factor, °F/ (BTU/ hr) ft 	Heat Loss Rate, (BTU/ hr) ft 	R=factor, °F/ (BTU/ hr) ft 
TT-10430-VN-I	1/4	.030	.36	.08	1.13	18.3	21.3	10.7	13.0	30.9	10.7
TT-10632-VN-I	3/8	.032	.36	.08	1.26	23.0	17.0	13.4	10.4	38.5	8.6
TT-10835-VN-I	1/2	.035	.36	.08	1.38	27.5	14.2	16.0	8.8	45.7	7.2
TT-20435-VN-I	1/4	.035	.36	.08	1.13	18.3	21.3	10.7	13.0	30.9	10.7
TT-20635-VN-I	3/8	.035	.36	.08	1.26	23.0	17.0	13.4	10.4	38.5	8.6
TT-20835-VN-I	1/2	.035	.36	.08	1.38	27.5	14.2	16.0	8.8	45.7	7.2
TT-10430-VN-R	1/4	.030	.72	.08	1.85	13.5	29.0	8.1	17.3	23.5	14.0
TT-10632-VN-R	3/8	.032	.72	.08	1.98	16.3	24.0	9.7	14.4	28.3	11.7
TT-10835-VN-R	1/2	.035	.72	.08	2.10	18.9	20.7	11.3	12.4	32.8	10.1
TT-20435-VN-R	1/4	.035	.72	.08	1.85	13.5	29.0	8.1	17.3	23.5	14.0
TT-20635-VN-R	3/8	.035	.72	.08	1.98	16.3	24.0	9.7	14.4	28.3	11.7
TT-20835-VN-R	1/2	.035	.72	.08	2.10	18.9	20.7	11.3	12.4	32.8	10.1
TT-10430-VN-X	1/4	.030	.96	.08	2.33	12.0	32.5	7.2	19.3	21.2	15.6
TT-10632-VN-X	3/8	.032	.96	.08	2.46	14.3	27.3	8.6	16.3	25.1	13.1
TT-10835-VN-X	1/2	.035	.96	.08	2.58	16.4	23.8	9.9	14.2	28.8	11.5
TT-20435-VN-X	1/4	.035	.96	.08	2.33	12.0	32.5	7.2	19.3	21.2	15.6
TT-20635-VN-X	3/8	.035	.96	.08	2.46	14.3	27.3	8.6	16.3	25.1	13.1
TT-20835-VN-X	1/2	.035	.96	.08	2.85	16.4	23.8	9.9	14.2	28.8	11.5

NOTE: The performance figures presented above have been calculated to be used as a guide only. Actual performance may vary with individual plant conditions.





## LT— Light Steam Trace

Maximum Internal Exposure Temperature Rating up to 400°F (204°C)



### General

Parker LT Temptrace® Light Steam Trace Tubing consists of single or multiple process tubes insulated from a single tracer with non-hygroscopic glass fiber insulation and overall non-hygroscopic glass fiber insulation and black, 105°C rated, flame-resistant PVC (FR PVC) jacket.

The LT Series Temptrace® is designed to utilize saturated steam pressures to 230 PSIG (15.8 BAR) and 400°F (204.4°C) without generating a process tube temperature in excess of 200°F (93°C) or a jacket surface temperature greater than 140°F (60°C) at 80°F (26.6°C) ambient. Standard product has a Maximum Temperature Rating (MTR\*) of 400°F (204.4°C). Higher temperature rated designs are available. Consult Division for details.

\*Maximum Temperature Rating is the maximum allowable temperature of the tracing fluid. Temperatures in excess of this may damage the product or alter its performance.

### Applications

The LT Temptrace® permits use of higher pressure steam to heat trace instrument lines carrying water, light oil, paraffin, paraffin-based fluids and temperature-sensitive chemicals. Parker LT Temptrace® is ideal for simple instrument line freeze protection and viscosity maintenance applications.

### Tubing

Type 122 DHP Seamless Copper and 316/316L Welded Stainless Steel are standard. Additional materials, wall thicknesses and seamless stainless steel are available upon request. For Material Specifications of metal tubing, see *Technical Data* section of the catalog. Consult Division for details.

### Insulation

Air-spaced, cross wrapped applied non-hygroscopic fiberglass thermal insulation for minimum heat loss. The insulated tracer provides a more constant process tube temperature over long tubing runs.

### Jacket

The tough, black, 105°C rated, flame-resistant PVC (FR PVC) jacket protects the tubing against corrosive atmospheres, water, oils, acids, alkalies and most chemicals. Additional jacket materials are available upon request. For Material Specifications of jackets, see *Technical Data* section of the catalog. Consult Division for additional details.

### Testing

Each tube in every length of Parker Temptrace® is pressure tested prior to shipment to assure the instrument engineer a high quality, reliable, trouble-free product. For Testing Specifications, see *Technical Data* section of the catalog.

### Accessories

Accessories are available for connecting multiple lengths of steam trace bundles and sealing bundle ends.

**NOTE:** It is absolutely necessary to seal the ends against contamination from moisture and/or corrosive liquids. Parker Hannifin cannot assume any liability for product damage caused by moisture from unsealed ends.

**LT— Light Steam Trace Bundles**

Maximum Internal Exposure up to 400°F\* (204°C)



**LT - 2 08 35 B - 2 06 35 - V B**

<b>LT</b>	<b>Bundle Type</b>	<b>2</b>	<b>Process Tube Material</b>	<b>08</b>	<b>Process Tube Size</b>	<b>35</b>	<b>Process Tube Size</b>	<b>B</b>	<b>Number of Process Tubes</b>
	LT= Light Trace Temptrace		1= Smls Copper Type DHP Alloy No 122. ASTM B68/B75 2= Welded Stainless Steel Type 316/316L ASTM A269 3= Welded Stainless Steel Type 304 ASTM A269 B= Smls 316/316L ASTM A269 C= Smls 304 ASTM A269 D= Smls Monel Type 400 E= Smls Hastelloy C22 H= Smls 316H ASTM A213 I= Smls Incoloy 825 L= Electropolish Smls 316/316L ASTM A269 (10Ra Max) M= Smls 316/316L ASTM A213 S= Silco Smls 316/316L Stainless ASTM A269 P= PFA Fluoropolymer F= FEP Fluoropolymer T= TFE Fluoropolymer 7= Parflex 919 PTFE SS Braided Hose 9= Customer Specified Tube Material		<b>O.D.</b> See Selection Charts Imperial 02=1/8" 03=3/16" 04=1/4" 05=5/16" 06=3/8" 07=7/16" 08=1/2" 10=5/8" 12=3/4" 16=1" Metric MA=2mm MB=4mm MC=6mm MD=8mm ME=10mm MF=12mm MG=14mm MH=16mm		<b>Wall Thickness</b> See Selection Charts Imperial 16=.016" 20=.020" 28=.028" 30=.030" 31=.031" 32=.032" 35=.035" 40=.040" 47=.047" 49=.049" 50=.050" 62=.062" 65=.065" 83=.083" Metric 89=.89mm 10=1.0mm 15=1.5mm 20=2.0mm 25=2.5mm		A= 1 Tube B= 2 Tubes C= 3 Tubes etc.



<b>2</b>	<b>Tracer Tube Material</b>	<b>06</b>	<b>Tracer Tube Size</b>	<b>35</b>	<b>Tracer Tube Size</b>	<b>V</b>	<b>Jacket Material</b>	<b>B</b>	<b>Jacket Color</b>
	1= Smls Copper Type DHP Alloy No 122. ASTM B68-B75 2= Welded Stainless Steel Type 316/316L ASTM A269 3= Welded Stainless Steel Type 304 ASTM A269 B= Smls 316/316L ASTM A269 C= Smls 304 ASTM A269 D= Smls Monel Type 400 E= Smls Hastelloy C22 H= Smls 316H ASTM A213 I= Smls Incoloy 825 L= Electropolish Smls 316/316L ASTM A269 (10Ra Max) M= Smls 316/316L ASTM A213 S= Silco Smls 316/316L Stainless ASTM A269 P= PFA Fluoropolymer F= FEP Fluoropolymer T= TFE Fluoropolymer 7= Parflex 919 PTFE SS Braided Hose 9= Customer Specified Tube Material		<b>O.D.</b> See Selection Charts Imperial 02=1/8" 03=3/16" 04=1/4" 05=5/16" 06=3/8" 07=7/16" 08=1/2" 10=5/8" 12=3/4" 16=1" Metric MA=2mm MB=4mm MC=6mm MD=8mm ME=10mm MF=12mm MG=14mm MH=16mm		<b>Wall Thickness</b> See Selection Charts Imperial 16=.016" 20=.020" 28=.028" 30=.030" 31=.031" 32=.032" 35=.035" 40=.040" 47=.047" 49=.049" 50=.050" 62=.062" 65=.065" 83=.083" Metric 89=.89mm 10=1.0mm 15=1.5mm 20=2.0mm 25=2.5mm		V=FR-PVC T=FR-TPE U=FR-PUR P=PUR R=TPR E=FRPE L=LDPE F=PVDF Note: Parflex standard jacket material is FR-PVC		N=Black B=Blue G=Green O=Orange Y=Yellow P=Purple R=Red W=White Note: Parflex standard color jacket is black Note: For standard black FR-PVC products the -VN may be dropped.

**Performance Data****Light Steam Trace Tubing— Single Process Tube**

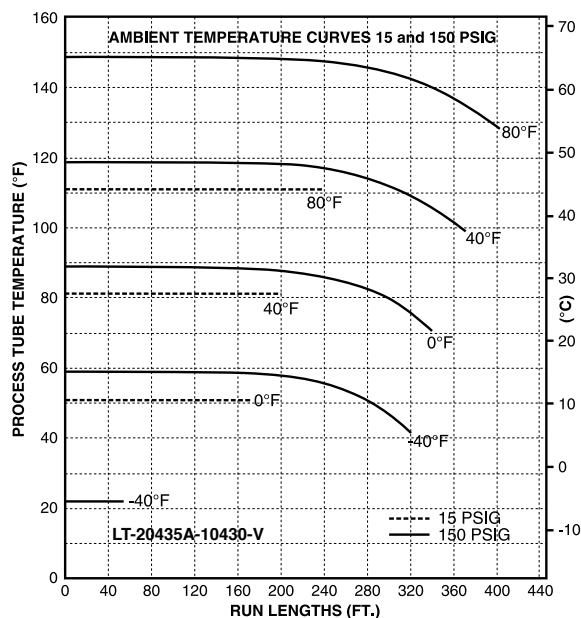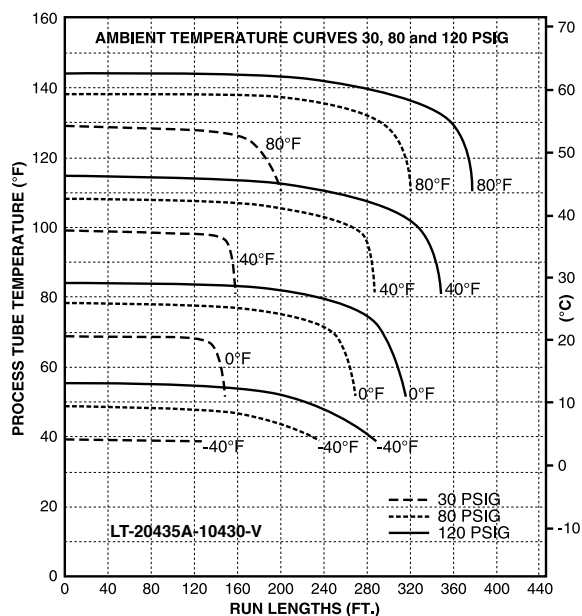


These performance graphs are based on a 1/4" process tube and a 1/4" tracer tube. Apply run length and temperature correction factors for other process and tracer tube sizes.

**Performance Data****Light Steam Trace Tubing— Multiple Process Tubes**

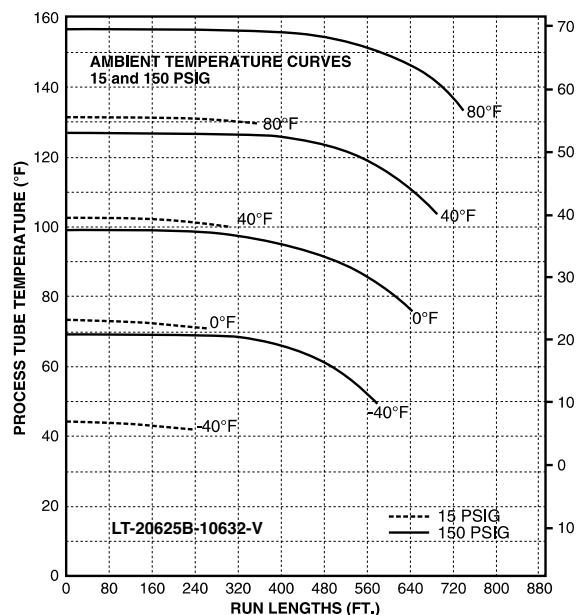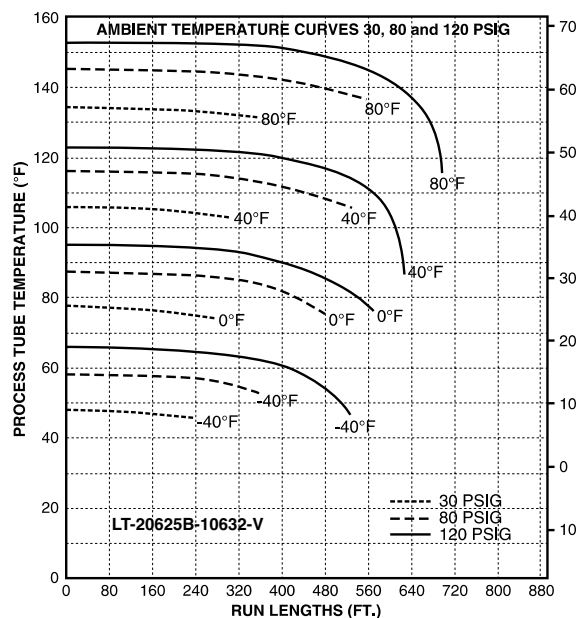These performance graphs are based on 3/8" process tubes and a 3/8" tracer tube. Apply run length and temperature correction factors for other process and tracer tube sizes.










## Light Steam Trace Performance Chart

Part Number #	Process Tube O.D. (in.) 	Tracer Tube O.D. (in.) 	Heat Loss (BTU/hr ft-°F) (DT = 100°F) 	Temperature	Run Length (ft.)
Light Trace – Single Process Tube					
LT-20435A-10430	1/4	1/4	10.9	1	1
LT-20635A-10430	3/8	1/4	10.9	0.97	0.9
LT-20835A-10430	1/2	1/4	10.9	0.95	0.8
LT-20635A-10632	3/8	3/8	13.7	–	–
LT-20835A-10632	1/2	3/8	13.7	1.07	1.44
Light Trace – Dual Process Tube					
LT-20435B-10430	(2) 1/4	1/4	10.9	–	–
LT-20635B-10430	(2) 3/8	1/4	10.9	–	–
LT-20835B-10430	(2) 1/2	1/4	10.9	–	–
LT-20635B-10632	(2) 3/8	3/8	13.7	1	1
LT-20835B-10632	(2) 1/2	3/8	13.7	0.98	0.9

LT—Light Steam Trace® performance graphs are based upon a 1/4" process tube and a 1/4" tracer tube. Temperature and run length correction factors for other sizes can determine using the chart provided.

## Installation Guide— Light Steam Trace

Part Number #	Process Tube O.D. (in.)  Welded Stainless*	Tracer Tube O.D. (in.)  Copper	Nominal Product O.D. (in.) 	Product Weight (lbs./ft.) 	Minimum Bend Radius (in.) 	Horizontal/ Vertical Support Centers (ft.) 	Slope 
Light Trace-Single Process Tube							
LT-20435A-10430	1/4	1/4	1.3	.385	10	5-6' 10-15'	1" in 8'
LT-20635A-10430	3/8	1/4	1.4	.453	12	5-6' 10-15'	1" in 6'
LT-20835A-10430	1/2	1/4	1.5	.519	14	5-6' 10-15'	1" in 3'
LT-20635A-10632	3/8	3/8	1.5	.531	12	5-6' 10-15'	1" in 7'
LT-20835A-10632	1/2	3/8	1.6	.598	14	5-6' 10-15'	1" in 6'
Light Trace-Dual Process Tube							
LT-20435B-10430	(2) 1/4	1/4	1.3	.473	14	5-6' 10-15'	1" in 8'
LT-20635B-10430	(2) 3/8	1/4	1.5	.599	15	5-6' 10-15'	1" in 6'
LT-20835B-10430	(2) 1/2	1/4	1.6	.778	16	5-6' 10-15'	1" in 3'
LT-20635B-10632	(2) 3/8	3/8	1.6	.675	16	5-6' 10-15'	1" in 7'
LT-20835B-10632	(2) 1/2	3/8	1.7	.803	18	5-6' 10-15'	1" in 6'

\*Available in seamless stainless steel and other alloys

## HT— Heavy Steam Trace

Maximum Internal Exposure Temperature up to 400°F (204°C)



### General

Parker HT—Heavy Steam Trace Tubing consists of a single process tube and tracer, non-hygroscopic glass fiber insulation and a black, 105°C rated, flame-resistant PVC (FR PVC) jacket.

The HT—Heavy Steam Trace Tubing is designed to be used with steam pressures of 15 PSIG (1 BAR) to 230 PSIG (15.8 BAR) and maintain a process tube temperature of from 200°F (93°C) at -40°F (-40°C) ambient to 355°F (179°C) at 80°F (26.6°C) ambient with product surface temperatures of less than 140°F (60°C) at 80°F (26.6°C) ambient. Standard product has a Maximum Temperature Rating (MTR\*) of 400°F (204.4°C). Higher temperature rated designs are available. Consult Division for details.

\*Maximum Temperature Rating is the maximum allowable temperature of the tracing fluid. Temperatures in excess of this may damage the product or alter its performance.

### Applications

The HT—Heavy Steam Trace Tubing is used with high temperature steam to heat trace instrument size lines when elevated temperatures are required. Such applications as pressure transmission and analyzer sample lines carrying heavy oils or distillates, gases or vapors are ideal service for the HT—Heavy Steam Trace Tubing products. The direct tracer to process tube contact produces higher process tube temperatures than the light trace product.

### Tubing

Type 122 DHP Seamless Copper and 316/316L Welded Stainless Steel are standard. Additional materials, wall thicknesses and seamless stainless steel are available upon request. For Material Specifications of metal tubing, see *Technical Data* section of the catalog. Consult Division for details.

### Tubing Identification

When process tube and tracer tube are the same size and material, each individual tube is printed with tube number at two-inch intervals.

### Insulation

Air-spaced, cross wrapped applied non-hygroscopic fiberglass thermal insulation for minimum heat loss.

### Jacket

The tough, black, 105°C rated, flame-resistant PVC (FR PVC) jacket protects the tubing against corrosive atmospheres, water, oils, acids, alkalies and most chemicals. Additional jacket materials are available upon request. For Material Specifications of jackets, see *Technical Data* section of the catalog. Consult Division for additional details.

### Testing

Each tube in every length of Parker Temptrace® is pressure tested prior to shipment to assure the instrument engineer a high quality, reliable, trouble-free product. For Testing Specifications, see *Technical Data* Section of the catalog.

### Accessories

Accessories are available for connecting multiple lengths of steam trace bundles and sealing bundle ends.

**NOTE:** It is absolutely necessary to seal the ends against contamination from moisture and/or corrosive liquids. Parker Hannifin cannot assume any liability for product damage caused by moisture from unsealed ends.



## How To Specify &amp; Order

## HT— Heavy Steam Trace Bundles

Maximum Internal Exposure up to 400°F\* (204°C)



**HT-20835B-20635-VB**

HT	Bundle Type	2	Process Tube Material	08	Process Tube Size	35	Process Tube Size	B	Number of Process Tubes
	HT= Heavy Trace Temptrace		1= Smls Copper Type DHP A= Nb122ASTM B68-B75 2= Welded Stainless Steel Type 316/316L ASTM A269 3= Welded Stainless Steel Type 304 ASTM A269 B= Smls 316/316L ASTM A269 C= Smls 304 ASTM A269 D= Smls Monel Type 400 E= Smls Hastelloy C22 H= Smls 316H ASTM A213 I= Smls Incoloy 825 L= Electropolish Smls 316/316L ASTM A269 (10Ra Max) M= Smls 316/316L ASTM A213 S= Silco Smls 316/316L ASTM A269 P= PFA Fluoropolymer F= FEP Fluoropolymer T= TFE Fluoropolymer 7= Parflex 919 PTFE SS Braided Hose 9= Customer Specified Tube Material		O.D.		Wall Thickness		A= 1 Tube B= 2 Tubes C= 3 Tubes etc.
					See Selection Charts		See Selection Charts		
					Imperial		Imperial		
					02=1/8"		16=.016"		
					03=3/16"		20=.020"		
					04=1/4"		28=.028"		
					05=5/16"		30=.030"		
					06=3/8"		31=.031"		
					07=7/16"		32=.032"		
					08=1/2"		35=.035"		
					10=5/8"		40=.040"		
					12=3/4"		47=.047"		
					16=1"		49=.049"		
							50=.050"		
							62=.062"		
							65=.065"		
							83=.083"		
					Metric		Metric		
					MA=2mm				
					MB=4mm				
					MC=6mm				
					MD=8mm				
					ME=10mm				
					MF=12mm				
					MG=14mm				
					MH=16mm				
							89=.89mm		
							10=1.0mm		
							15=1.5mm		
							20=2.0mm		
							25=2.5mm		



2	Tracer Tube Material	06	Tracer Tube Size	35	Tracer Tube Size	V	Jacket Material	B	Jacket Color
	1= Smls Copper Type DHP A= Nb122ASTM B68-B75 2= Welded Stainless Steel Type 316/316L ASTM A269 3= Welded Stainless Steel Type 304 ASTM A269 B= Smls 316/316L ASTM A269 C= Smls 304 ASTM A269 D= Smls Monel Type 400 E= Smls Hastelloy C22 H= Smls 316H ASTM A213 I= Smls Incoloy 825 L= Electropolish Smls 316/316L ASTM A269 (10Ra Max) M= Smls 316/316L ASTM A213 S= Silco Smls 316/316L ASTM A269 P= PFA Fluoropolymer F= FEP Fluoropolymer T= TFE Fluoropolymer 7= Parflex 919 PTFE SS Braided Hose 9= Customer Specified Tube Material		O.D.		Wall Thickness		V=FR-PVC T=FR-TPE U=FR-PUR P=PUR R=TPR E=FRPE L=LDPE F=PVDF		N=Black B=Blue G=Green O=Orange Y=Yellow P=Purple R=Red W=White
			See Selection Charts		See Selection Charts				
			Imperial		Imperial				
			02=1/8"		16=.016"				
			03=3/16"		20=.020"				
			04=1/4"		28=.028"				
			05=5/16"		30=.030"				
			06=3/8"		31=.031"				
			07=7/16"		32=.032"				
			08=1/2"		35=.035"				
			10=5/8"		40=.040"				
			12=3/4"		47=.047"				
			16=1"		49=.049"				
					50=.050"				
					62=.062"				
					65=.065"				
					83=.083"				
			Metric		Metric				
			MA=2mm						
			MB=4mm						
			MC=6mm						
			MD=8mm						
			ME=10mm						
			MF=12mm						
			MG=14mm						
			MH=16mm						
					89=.89mm				
					10=1.0mm				
					15=1.5mm				
					20=2.0mm				
					25=2.5mm				
							Note: Parflex standard jacket material is FR-PVC		Note: Parflex standard color jacket is black
									Note: For standard black FR-PVC jacketed products the -VN may be dropped.

**Performance Data****HT— Heavy Steam Trace Tubing — Single Process Tubes**

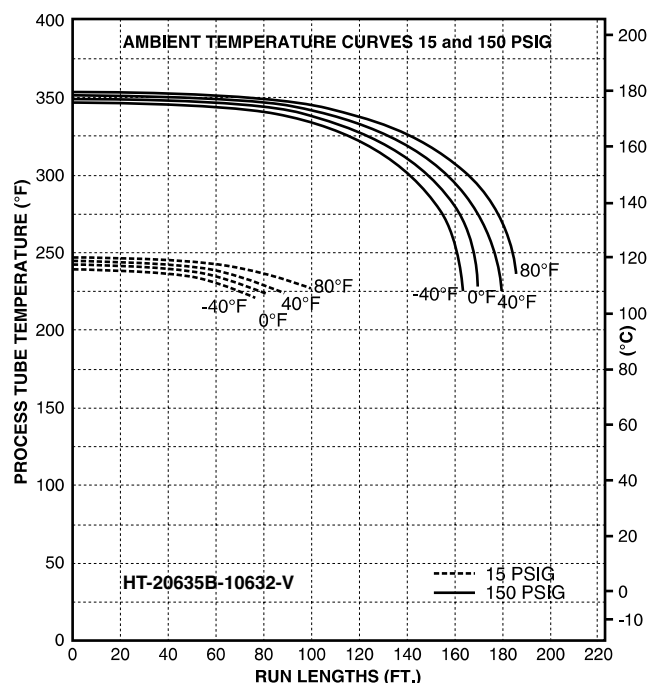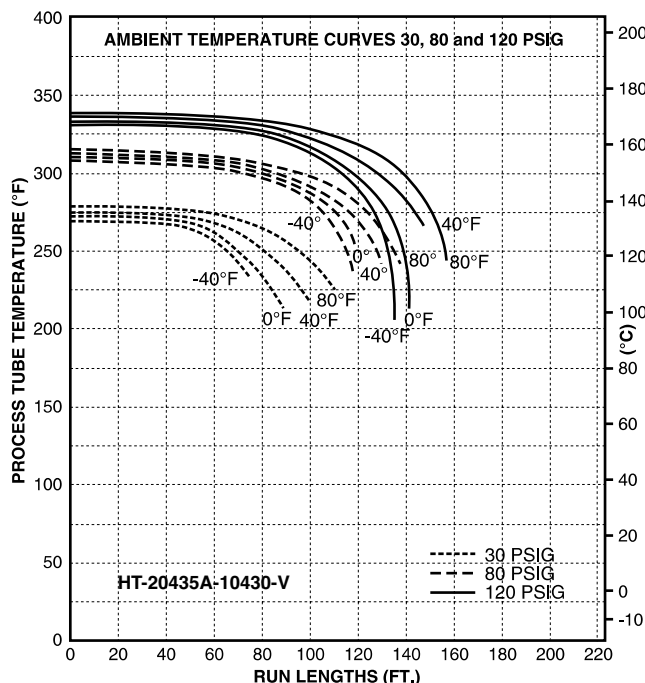


These performance graphs are based on a 1/4" process tube and a 1/4" tracer tube. Apply run length and temperature correction factors for other process and tracer tube sizes.

**Performance Data****HT— Heavy Steam Trace Tubing — Multiple Process Tubes**

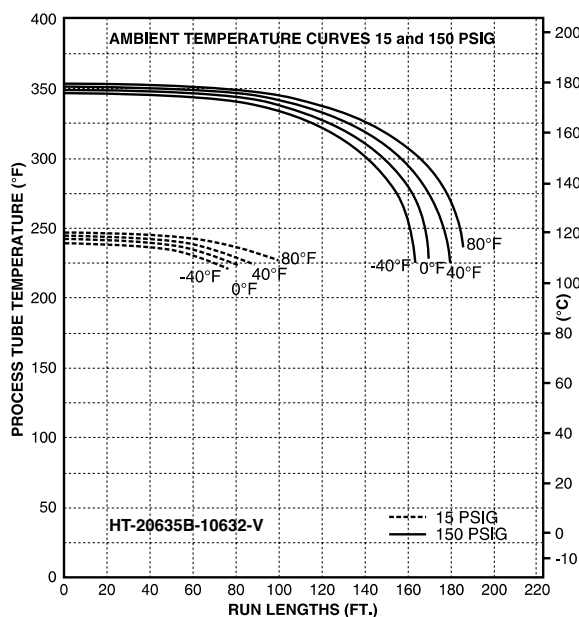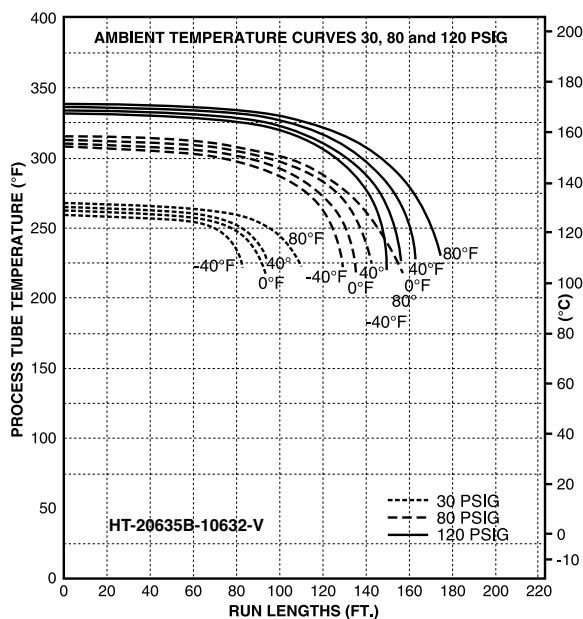These performance graphs are based on 3/8" process tubes and a 3/8" tracer tube. Apply run length and temperature correction factors for other process and tracer tube sizes.










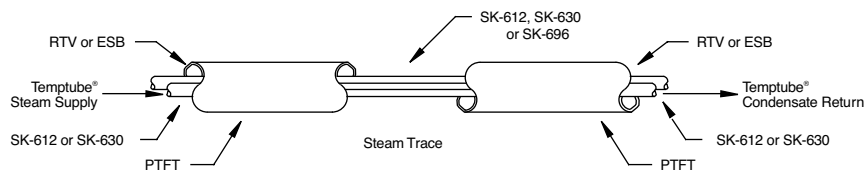
## Heavy Steam Trace Performance Chart

Part Number #	Process Tube O.D. 	Tracer Tube O.D. 	Heat Loss (BTU/hr ft-°F) (DT = 100°F) 	Temperature	Run Length (ft.)
Heavy Trace-Single Process Tube					
HT-20435A-10430	1/4	1/4	15.3	1	1
HT-20635A-10430	3/8	1/4	18.3	0.995	0.85
HT-20835A-10430	1/2	1/4	20.7	0.99	0.76
HT-20635A-10632	3/8	3/8	19.9	1.06	2.09
HT-20835A-10632	1/2	3/8	23.1	1.04	2.05
Heavy Trace-Dual Process Tube					
HT-20435B-10430	(2) 1/4	1/4	18	--	--
HT-20635B-10430	(2) 3/8	1/4	21.9	--	--
HT-20835B-10430	(2) 1/2	1/4	25.8	--	--
HT-20635B-10632	(2) 3/8	3/8	25.8	1	1
HT-20835B-10632	(2) 1/2	3/8	27.7	0.996	0.90

HT—Heavy Steam Trace performance graphs are based upon a 1/4" process tube and a 1/4" tracer tube. Temperature and run length correction factors for other sizes can determine using the chart provided

## Installation Guide— Heavy Steam Trace

Part Number #	Process Tube O.D. (in.) 	Tracer Tube O.D. (in.) 	Nominal Product O.D. (in.) 	Product Weight (lbs./ft.) 	Minimum Bend Radius (in.) 	Horizontal/Vertical Support Centers (ft.) 	Slope 
Heavy Trace – Single Process Tube							
HT-20435A-10430	1/4	1/4	1.1	.376	8	5-6' 10-15'	1" in 8'
HT-20635A-10430	3/8	1/4	1.3	.446	10	5-6' 10-15'	1" in 6'
HT-20835A-10430	1/2	1/4	1.4	.520	12	5-6' 10-15'	1" in 3'
HT-20635A-10632	3/8	3/8	1.3	.526	12	5-6' 10-15'	1" in 7'
HT-20835A-10632	1/2	3/8	1.5	.594	14	5-6' 10-15'	1" in 6'
Heavy Trace – Dual Process Tube							
HT-20435B-10430	(2) 1/4	1/4	1.2	.479	12	5-6' 10-15'	1" in 8'
HT-20635B-10430	(2) 3/8	1/4	1.4	.608	13	5-6' 10-15'	1" in 6'
HT-20835B-10430	(2) 1/2	1/4	1.6	.743	13	5-6' 10-15'	1" in 3'
HT-20635B-10632	(2) 3/8	3/8	1.5	.682	13	5-6' 10-15'	1" in 7'
HT-20835B-10632	(2) 1/2	3/8	1.7	.812	14	5-6' 10-15'	1" in 6'

**Steam Trace Accessory Selections****End Sealant**

**Description:** Parker end sealant is a paste material which becomes a tough, rubbery seal upon exposure to air. Total curing takes about 24 hours, at which time it has excellent resistance to weather, ozone, oil, many chemicals and extreme temperatures  $-75^{\circ}\text{F}$  ( $-60^{\circ}\text{C}$ ) to  $+400^{\circ}\text{F}$  ( $204.4^{\circ}\text{C}$ ). High temperature sealant to  $500^{\circ}\text{F}$  ( $260^{\circ}\text{C}$ ) available.

**To order:** Specify Parker room temperature vulcanizing (RTV) end sealant part numbers:

**Important:** All Parker steam products must have sealed ends to prevent contamination of insulation. Parker product ends are sealed at the factory and it is important that these seals be maintained during storage and that they are sealed upon installation. We will not assume liability for any corrosion or damage to the product caused by such contamination.



**RTV-103BLK**  
– 2.8 oz. tube,  $400^{\circ}\text{F}$   
( $204.4^{\circ}\text{C}$ ) rated



**RTV-103BLK**  
10.3 – 10.1 oz. cartridge,  
 $400^{\circ}\text{F}$  ( $204.4^{\circ}\text{C}$ ) rated



**RTV-106RED** – 2.8 oz.  
tube, high temperature  
 $500^{\circ}\text{F}$  ( $260^{\circ}\text{C}$ )

**Heat Shrinkable Boots (HSBs)**

Parker heat shrink boots (HSB) are designed to prevent moisture from entering the ends of Parker Temptube™ bundles. The dash number represents the number of breakouts in each boot. The boots can be used on 1/4", 3/8", or 1/2" tubes, or as a seal for the heating cable.



**HSB-2**



**HSB-1**

**PTFT Feed-Through Seal Kits**

Selected specifically for use with Parker Temptube® and Temptube™ bundles. PTFT kits provide an excellent method in which to install Parker Temptube® and Temptube™ bundles in instrument enclosures and cabinets.



**PTFT – 1.50**




**PTFT – 2.00**

## End Seal Boot (ESB) Kit

Parker end seal boot (ESB) kits are designed to prevent moisture from entering the ends of Parker Temptrace® bundles. Each boot allows up to three tube breakouts. These breakouts have marks to specify where to cut for either a 1/4", 3/8" and 1/2" tube.

### Each Kit contains:

- (2) End Seal Boots
- (6) Stainless Steel Hose Clamps
- (2) Plastic Hose Clamps (1.47" - 1.72")
- (2) Plastic Hose Clamps (1.73"-2.02")
- (2) Mastic Sealant (3/4" wide x 9" long)



## Splice Kit SK-612

The SK-612 has been designed to provide long life, weatherproof thermal insulation and jacket over a tube fitting or instrument connection.

There is sufficient material in each SK-612 Splice Kit to insulate two (2) splices or bundle ends.

### Each Kit contains:

- (2) 8"x 8" self-sealing rubber sheets with a 6" x 12" fiberglass pad.
- (1) Roll waterproof sealing tape.



## Splice Kit SK-630

The SK-630 has been designed to provide long life, weatherproof thermal insulation and jacket over a tube fitting or instrument connection.

There is sufficient material in each SK-612 Splice Kit to insulate two (2) splices or bundle ends.

### Each Kit contains:

- (2) 8"x 30" self-sealing rubber sheets with a 6" x 30" fiberglass pad.
- (1) Roll waterproof sealing tape.



## Splice Kit SK-696

The SK-696 has been designed to provide long life, weatherproof thermal insulation and jacket for longer lengths up to 96" (8ft.) of bundles or multiple connections.

### Each Kit contains:

- (1) Roll 8"x 96" self-sealing rubber sheet.
- (1) Roll 6" x 96" fiberglass pad.
- (1) Roll waterproof sealing tape.





Fax Inquiry To: Sales Office 330-296-1829
--

**Parker Steam Trace Design Criteria Quote Request**

Date: \_\_\_\_\_ Customer Name: \_\_\_\_\_

Bundle Type: Light Trace ☐ (Low Temperature Maintenance and Freeze Protection)  
 Heavy Trace ☐ (High Temperature Maintenance)

Total Quantity: \_\_\_\_\_ Feet ☐  
 Meters ☐

Specified Lengths: \_\_\_\_\_  
 \_\_\_\_\_

Part Number: \_\_\_\_\_ (See How-to-Order in catalog.)

-----

***If not sure of part number complete the following criteria:***

Maximum Steam Pressure: \_\_\_\_\_

Maximum Steam Temperature: \_\_\_\_\_

Process Tubes:

☐ How many process tubes: \_\_\_\_\_

Size: (O.D. and wall thickness): \_\_\_\_\_

Inches ☐Mm ☐

Tube Material: \_\_\_\_\_

Trace Tube:

Size: (O.D. and wall thickness): \_\_\_\_\_

Inches ☐Mm ☐

Tube Material: \_\_\_\_\_

Outer Jacket Type: (Note: Black FR-PVC is Standard)

FR-PVC ☐ TPR ☐FR-TPE ☐ FRPE ☐FR-PUR ☐ LDPE ☐PUR ☐ PVDF ☐

## SL – Self-Regulating Low Temperature Maintenance Bundles

Maintain Temperatures up to 150°F (65°C) and withstands  
Maximum Internal Exposure to 185°F (85°C)



### General

Parflex Temprace™ tubing is thermally insulated with a non-hygroscopic inorganic fiberglass material and protected with a flexible black flame-resistant PVC jacket.

Parflex standard Temprace™ is thermally insulated for transfer of fluids or gases up to 185°F (85°C) while maintaining an outer jacket surface temperature of 140°F (60°C), meeting NEC Personnel Protection Code 427.12.

SL-Temprace™ is designed to provide freeze protection and low-temperature maintenance for gases, liquids or other viscous materials. With outdoor temperatures of -40°F (-40°C), SL-Temprace™ will maintain a process fluid or gas at 40°F (4.4°C).

SL- Temprace™ can maintain process tube temperatures up to 140°F (60°C), depending upon ambient conditions.

### Heating Cables

Cables are available in 120V and 208-277 volt, with Heat outputs of 3, 5, 8 and 10 watt/ft.

Parflex standard SL designs all come with an internal tinned copper braid on heating cable for grounding purpose and a TPR jacket over the heating cable to provide additional protection against many inorganic chemical solutions.

### Common Tube Materials and Sizes

Temprace™ is readily available in 1/4", 3/8" and 1/2" sizes as well as metric sizes. (6 mm, 8mm, 10mm and 12mm) The most common stock alloys are copper type #122 DHP seamless ASTM B68, B75, as well as seamless and welded stainless steel tubing 316/316L ASTM A269. Many other alloys, ASTM standards and sizes are available upon request. (See Technical Data Section)

### Testing

All Temprace™ products are pressure tested prior to shipment. Third party testing and witnessing is available upon request, including DNV, ABS and Lloyd's Register. Contact factory for complete details.

### Jacketing Materials

Black UV resistant FR-PVC is our standard material, however other jacketing materials are available upon request, including non-halogenated FR-TPE and Urethanes. (See Technical Data Section)

**NOTE:** It is absolutely necessary to seal the ends against contamination from moisture and/or corrosive liquids. Parker Hannifin cannot assume any liability for product damage caused by moisture from unsealed ends.

## How to Specify & Order

### SL-Self-Regulating Low Temperature Maintenance





### Electric Trace Bundles: MTR 185°F (85°C)

Maintain Temperatures up to 150°F (65°C) with a \*Maximum Internal Exposure up to 185°F (85°C)

**SL - 312 - B0835B - VB**

SL	Bundle Type	3	Heating Cable (Watts/ft)	1	Heating Cable Voltage	2	Area Classification	B	Process Tube Material
	SL= Self-Regulating Low Temperature		See Selection Chart		1= 120V 2= 240V  * 240 volt cables can be powered at 208, 240 or 277 volts		1= Class 1, Div. 1 Areas  2= General Purpose & Class I, Div. 2 Areas		1= Smls Copper Type DHP Alloy No 122. ASTM B68-B75 2= Welded Stainless Steel Type 316/316L ASTM A269 3= Welded Stainless Steel Type 304 ASTM A269 B= Smls 316/316L ASTM A269 C= Smls 304 ASTM A269 D= Smls Monel Type 400 E= Smls Hastelloy C22 H= Smls 316H ASTM A213 I= Smls Incoloy 825 L= Electropolish Smls 316/316L ASTM A269 (10Ra Max) M= Smls 316/316L ASTM A213 S= Silco Smls 316/316L ASTM A269 P= PFA Fluoropolymer F= FEP Fluoropolymer T= TFE Fluoropolymer 7= Parflex 919 PTFE SS Braided Hose 9= Customer Specified Tube Material

08	Process Tube Size	35	Process Tube Size	B	Number of Process Tubes	V	Jacket Material	B	Jacket Color
	O.D.		Wall Thickness		A= 1 Tube B= 2 Tubes C= 3 Tubes etc.		V=FR-PVC T=FR-TPE U=FR-PUR P=PUR R=TPR E=FRPE L=LDPE F=PVDF		N=Black B=Blue G=Green O=Orange Y=Yellow P=Purple R=Red W=White
	See Selection Charts		See Selection Charts						
	Imperial		Imperial						
	02=1/8" 03=3/16" 04=1/4" 05=5/16" 06=3/8" 07=7/16" 08=1/2" 10=5/8" 12=3/4" 16=1"		16=.016" 20=.020" 28=.028" 30=.030 31=.031" 32=.032" 35=.035" 40=.040" 47=.047" 49=.049" 50=.050" 62=.062" 65=.065" 83=.083"		P= 2 Tube Parallel Design		Note: Parflex standard jacket material is FR-PVC		Note: Parflex standard color jacket is black
	Metric		Metric						Note: For standard black FR-PVC jacketed products the -VN may be dropped.
	MA=2mm MB=4mm MC=6mm MD=8mm ME=10mm MF=12mm MG=14mm MH=16mm		89=.89mm 10=1.0mm 15=1.5mm 20=2.0mm 25=2.5mm						

Part Number	Process Tube O.D. (in.)	Wall Thickness (in.)	Nominal Product O.D. (in.)	Product Weight (lbs./ft.)	Minimum Bend Radius (in.)	Watt Density per foot / Voltage	Circuit Length Ft @ 50°F Start-up / Breaker (amps)	Performance At Various Ambient Conditions	
#	Smls Stainless*					Watt/Ft		At -40°F (-40°C) will maintain at least**	At 80°F (23.9°C) will maintain at least**
SL — Single Process Tube — Maximum Internal Exposure Temperature, Power off 185°F (85°C)									
SL512-B0435A	1/4	0.035	1.21	0.33	7	5 watt / 120V	270ft / 25A	40°F (4°C)	120°F (49°C)
SL512-B0635A	3/8	0.035	1.31	0.39	8	5 watt / 120V	270ft / 25A	40°F (4°C)	115°F (46°C)
SL512-B0835A	1/2	0.035	1.41	0.46	8	5 watt / 120V	270ft / 25A	40°F (4°C)	115°F (46°C)
SL812-B1249A	3/4	0.049	1.64	0.68	10	8 watt / 120V	215ft / 25A	40°F (4°C)	125°F (52°C)
SL — Dual Process Tubes — Maximum Internal Exposure Temperature, Power off 185°F (85°C)									
SL512-B0435B	(2) 1/4	0.035	1.28	0.42	8	5 watt / 120V	270ft / 25A	40°F (4°C)	115°F (46°C)
SL512-B0635B	(2) 3/8	0.035	1.43	0.54	9	5 watt / 120V	270ft / 25A	40°F (4°C)	115°F (46°C)
SL812-B0835B	(2) 1/2	0.035	1.61	0.66	10	8 watt / 120V	215ft / 25A	40°F (4°C)	125°F (52°C)
SL812-B1239B	(2) 3/4	0.049	1.99	1.11	12	8 watt / 120V	215ft / 25A	40°F (4°C)	120°F (49°C)

\*Many other alloys available, as well as seamless stainless steel tubing. Product is also available in 208, 240 and 277V

\*\* In some cases, without use of a controller, this design could maintain higher temperatures at the ambient temperature shown.

\*\*The temperature maintained is based upon the watt density heater shown, higher watt density heaters could be used to achieve a greater maintenance temperatures.

## FM – Factory Mutual

General Purpose - Ordinary Locations  
Hazardous Locations, when installed with Parflex accessories.

- Class I, Div. 2, Groups B, C and D (gases, vapors)
- Class II, Div.2, Group F, G (Combustible dust)
- Class III, Div.2, (ignitable fibers and filings)

## T-Temperature Ratings

- 3 watt rated T6 temperature class
- 5 and 8 watt rated T5 temperature class
- 10 watt rated T4A temperature class

## CSA – Canadian Standards Association

CSA Certified for ordinary locations  
For certified hazardous locations contact Parflex



**ATEX** - Certified cables & accessories available

## Electrical Specifications:

Operating Voltage: 120 V or 240V  
Bus Wire Voltage Rating: 600 Volts  
Bus Wire Size: 16 AWG

## Maximum Circuit Length (ft) at Start-up °F

Low-Temp Cable Rating	50°F (10°C) Circuit Length In Feet				0°F (-18°C) Circuit Length In Feet				-20°F (-29°C) Circuit Length In Feet			
Circuit Breaker Size (Amps)	10	20	25	30	10	20	25	30	10	20	25	30
3 watt / 120V	205	360	NR	NR	135	270	330	360	120	245	300	360
3 watt / 240V	400	660	NR	NR	275	555	660	NR	245	495	600	660
5 watt / 120V	125	250	270	NR	90	180	225	270	80	160	205	245
5 watt / 240V	250	505	540	NR	180	360	450	540	160	325	405	490
8 watt / 120V	100	200	215	NR	70	145	180	215	65	235	300	350
8 watt / 240V	185	375	420	NR	135	265	335	395	120	325	300	350
10 watt / 120V	60	130	160	180	50	105	130	155	45	95	120	140
10 watt / 240V	100	210	260	315	80	170	210	255	75	160	195	240

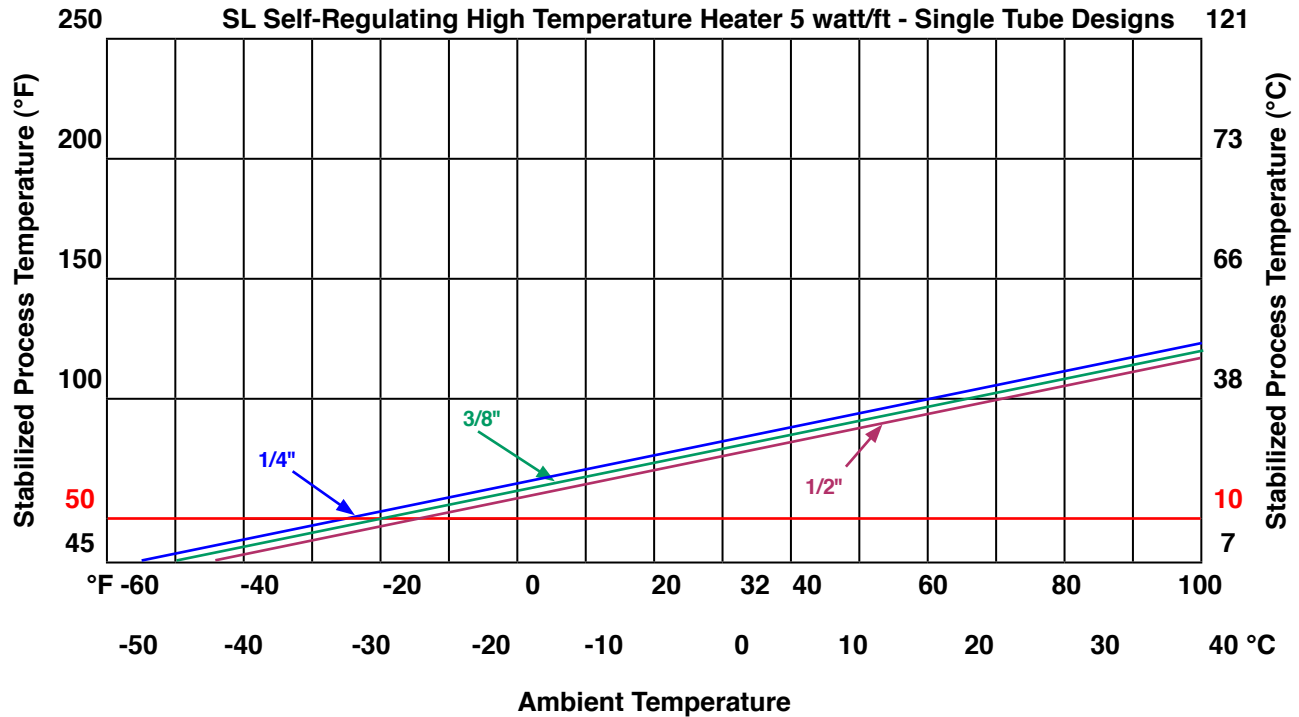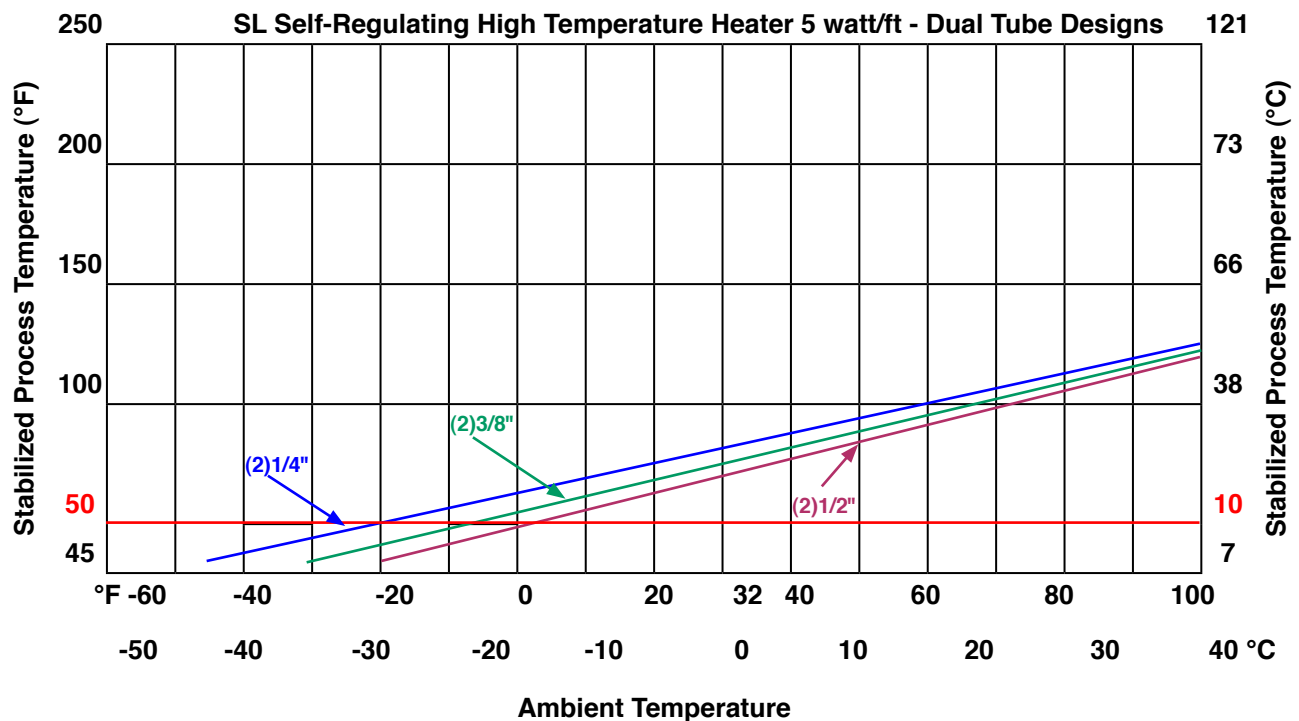**Performance Data—Single Process Tube****Performance Data—Dual Process Tube**



<b>SL Series Self-Regulating Bundles</b> <b>Maximum Exposure 185°F (85°C)</b> <b>Process Tubes 1/4" to 1/2" O.D. ( 6mm to 12mm)</b> <b>Single or Dual Tube Designs</b>					
<b>**Minimum Process Temperature to Maintain</b>	<b>Standard Insulation Package *</b>				
	<b>Environments Average High / Low Ambient Conditions</b>				
	Extreme Cold	Cold	Moderate Cold	Moderate	Warm
	-65°F Low 80°F High	-40°F Low 80°F High	-10°F Low 95°F High	0°F Low 105°F High	10°F Low 115°F High
120 Volts	-54°C Low 26°C High	-40°C Low 26°C High	-24°C Low 35°C High	-18°C Low 40°C High	-13°C Low 46°C High
40°F (4°C)	8 Watt / Ft	8 Watt / Ft	5 Watt / Ft	3 Watt / Ft	3 Watt / Ft
50°F (10°C)	10 Watt / Ft	8 Watt / Ft	5 Watt / Ft	5 Watt / Ft	3 Watt / Ft
75°F (24°C)			8 Watt / Ft	8 Watt / Ft	8 Watt / Ft
208 Volts					
40°F (4°C)	10 Watt / Ft	8 Watt / Ft	5 Watt / Ft	5 Watt / Ft	3 Watt / Ft
50°F (10°C)		10 Watt / Ft	8 Watt / Ft	8 Watt / Ft	5 Watt / Ft
75°F (24°C)				10 Watt / Ft	8 Watt / Ft
240 Volts					
40°F (4°C)	8 Watt / Ft	8 Watt / Ft	5 Watt / Ft	3 Watt / Ft	3 Watt / Ft
50°F (10°C)	10 Watt / Ft	8 Watt / Ft	5 Watt / Ft	5 Watt / Ft	3 Watt / Ft
75°F (24°C)			8 Watt / Ft	8 Watt / Ft	8 Watt / Ft

\* The above heater cable selection is based upon our standard insulation package, other insulation packages are available to maintain higher temperatures.

\*\* The maintenance temperature could actually be higher depending upon the size and number of tubes required, it is recommended that for precise temperature control that a thermal sensor be used. Contact the factory for more exact product thermal property based upon your application conditions.

## How to Use:

- 1) Check to be sure you are using the correct chart.
- 2) Choose your operating voltage.
- 3) Choose the minimum process temperature you want to maintain. Note: If temperature is not shown, pick the next higher option.
- 4) Follow chart across to the ambient Condition that best match your area.
- 5) Use the watt-density shown for your part number derivation.

## Note:

The watt-density selected will maintain the temperature indicated at a minimum. Depending upon actual ambient fluctuations, process tubes size and number of tubes, the maintenance temperature could be higher.

**SL Series Self-Regulating Bundles**  
**Maximum Exposure 185°F (85° C)**  
**Process Tubes 3/4" to 1" O.D. ( 19mm to 25mm)**  
**Single Tube Designs (consult factory for multiple tubes)**

<b>**Minimum Process Temperature to Maintain</b>	<b>Standard Insulation Package *</b>				
	<b>Environments Average High / Low Ambient Conditions</b>				
	Extreme Cold	Cold	Moderate Cold	Moderate	Warm
	-65°F Low 80°F High	-40°F Low 80°F High	-10°F Low 95°F High	0°F Low 105°F High	10°F Low 115°F High
<b>120 Volts</b>	-54°C Low 26°C High	-40°C Low 26°C High	-24°C Low 35°C High	-18°C Low 40°C High	-13°C Low 46°C High
40°F (4°C)	10 Watt / Ft	8 Watt / Ft	5 Watt / Ft	5 Watt / Ft	3 Watt / Ft
50°F (10°C)		10 Watt / Ft	8 Watt / Ft	5 Watt / Ft	5 Watt / Ft
75°F (24°C)			10 Watt / Ft	10 Watt / Ft	8 Watt / Ft
<b>208 Volts</b>					
40°F (4°C)		10 Watt / Ft	8 Watt / Ft	5 Watt / Ft	5 Watt / Ft
50°F (10°C)		10 Watt / Ft	8 Watt / Ft	8 Watt / Ft	5 Watt / Ft
75°F (24°C)					10 Watt / Ft
<b>240 Volts</b>					
40°F (4°C)	10 Watt / Ft	8 Watt / Ft	5 Watt / Ft	5 Watt / Ft	3 Watt / Ft
50°F (10°C)		10 Watt / Ft	8 Watt / Ft	5 Watt / Ft	5 Watt / Ft
75°F (24°C)			10 Watt / Ft	10 Watt / Ft	8 Watt / Ft

\* The above heater cable selection is based upon our standard insulation package, other insulation packages are available to maintain higher temperatures.

\*\* The maintenance temperature could actually be higher depending upon the size and number of tubes required, it is recommended that for precise temperature control that a thermal sensor be used. Contact the factory for more exact product thermal property based upon your application conditions.

**How to Use:**

- 1) Check to be sure you are using the correct chart.
- 2) Choose your operating voltage.
- 3) Choose the minimum process temperature you want to maintain. Note: If temperature is not shown, pick the next higher option.
- 4) Follow chart across to the ambient Condition that best match your area.
- 5) Use the watt-density shown for your part number derivation.

**Note:**

The watt-density selected will maintain the temperature indicated at a minimum. Depending upon actual ambient fluctuations, process tubes size and number of tubes, the maintenance temperature could be higher.

## Parker Electric Trace Design Criteria Quote Request

Fax Inquiry To: Sales Office  
330-296-6747

Date: \_\_\_\_\_ Customer Name: \_\_\_\_\_

Bundle Type: SL Trace ☐ (Low Temperature Maintenance up to 150°F (65°C) and Freeze Protection and maximum internal exposure of 185°F power off.)  
SH Trace ☐ (High Temperature Maintenance up to 250° F (121° C) and maximum internal exposure of 400°F power off.)

Total Quantity: \_\_\_\_\_ Feet ☐  
Meters ☐

Specified Lengths: \_\_\_\_\_  
\_\_\_\_\_

Part Number: \_\_\_\_\_ (See How-to-Order in catalog.)

*If not sure of part number complete the following criteria:*

Maximum Temperature to be maintained: \_\_\_\_\_

Lowest ambient temperature: \_\_\_\_\_

Hottest ambient temperature: \_\_\_\_\_

What is the hottest internal process tube or steam purge temperature? \_\_\_\_\_

Process Tubes:

☐ How many process tubes: \_\_\_\_\_  
Size: (O.D. and wall thickness): \_\_\_\_\_ Inches ☐  
Mm ☐  
Tube Material: \_\_\_\_\_

Trace Tube:

Size: (O.D. and wall thickness): \_\_\_\_\_ Inches ☐  
Mm ☐  
Tube Material: \_\_\_\_\_

Outer Jacket Type: (Note: Black FR-PVC is Standard)

FR-PVC ☐ TPR ☐  
FR-TPE ☐ FRPE ☐  
FR-PUR ☐ LDPE ☐  
PUR ☐ PVDF ☐

### Area Classification

General Purpose ☐  
Class 1, Division 2 ☐  
Class 1, Division 1 ☐

### Approval Agency

FM ☐ CSA ☐ ATEX ☐

## SH – Self-Regulating High Temperature Maintenance Bundles

Maintain Temperatures up to 250°F (121°C) and withstands an Internal Exposure Temperature of 400°F (204°C)



### General

Parflex Temptrace™ tubing is thermally insulated with a non-hygroscopic inorganic fiberglass material and protected with a flexible black flame-resistant PVC jacket.

Parflex standard Temptrace™ is thermally insulated for transfer of fluids or gases up to 400°F (204°C) while maintaining an outer jacket surface temperature of 140°F (60°C), meeting NEC Personnel Protection Code 427.12.

SH- Temptrace™ is designed to provide temperature maintenance for gases, liquids or other process materials. The high temperature self-regulating product has a maximum temperature rating of 250°F (121.1°C), power-on, and can be steam cleaned at 400°F (204°C), power-off and is T3 rated for 3, 5 & 8W. T2D 10, 15, 20W.

SH- Temptrace™ can maintain process tube temperatures up to 250°F (121.1°C), depending upon ambient conditions.

### Heating Cables

Cables are available in 120V and 208-277 volt, with Heat outputs of 5, 10, 15 and 20 watt/ft.

Parflex standard SH designs all come with an internal tinned copper braid on heating cable for grounding purpose and a Fluoropolymer jacket over the heating cable to provide additional protection against many harsh environments.

### Common Tube Materials and Sizes

Temptrace™ is readily available in 1/4", 3/8" and 1/2" sizes as well as metric sizes. (6 mm, 8mm, 10mm and 12mm) The most common stock alloys are copper type #122 DHP seamless ASTM B68, B75, as well as seamless and welded stainless steel tubing 316/316L ASTM A269. Many other alloys, ASTM standards and sizes are available upon request. (See Technical Data Section)

### Testing

All Temptrace™ products are pressure tested prior to shipment. Third party testing and witnessing is available upon request, including DNV, ABS and Lloyd's Register. Contact factory for complete details.

### Jacketing Materials

Black UV resistant FR-PVC is our standard material, however other jacketing materials are available upon request, including non-halogenated FR-TPE and Urethanes. (See Technical Data Section)

NOTE: It is absolutely necessary to seal the ends against contamination from moisture and/or corrosive liquids. Parker Hannifin cannot assume any liability for product damage caused by moisture from unsealed ends.

## SH- Self-Regulating High Temperature Maintenance Electric Trace Bundles: \*MTR = 400°F (204°C)

Maintain Temperatures up to 250°F (121°C) with a \*Maximum Internal Exposure up to 400°F (204°C)







**SH - 5 1 2 - B 08 35 B - V B**

SH	Bundle Type	5	Heating Cable (Watts/ft)	1	Heating Cable Voltage	2	Area Classification
	SH= Self-Regulating High Temperature		See Selection Chart		1 = 120V 2 = 240V  * 240 volt cables can be powered at 208, 240 or 277 volts		1 = Class 1, Div. 1 Areas 2 = General Purpose & Class I, Div.2 Areas
			3 = 3 watt 5 = 5 watt 8 = 8 watt 1 = 10 watt A = 15 watt D = 20 watt				

B	Process Tube Material	08	Process Tube Size	35	Process Tube Size	B	Number of Process Tubes	V	Jacket Material	B	Jacket Color
	1= Smls Copper Type DHP Alloy No 122. ASTM B68-B75 2= Welded Stainless Steel Type 316/316L ASTM A269 3= Welded Stainless Steel Type 304 ASTM A269 B= Smls 316/316L ASTM A269 C= Smls 304 ASTM A269 D= Smls Monel Type 400 E= Smls Hastelloy C22 H= Smls 316H ASTM A213 I= Smls Incoloy 825 L= Electropolish Smls 316/316L ASTM A269 (10Ra Max) M= Smls 316/316L ASTM A213 S= Silco Smls 316/316L ASTM A269 P= PFA Fluoropolymer F= FEP Fluoropolymer T= TFE Fluoropolymer 7= Parflex 919 PTFE SS Braided Hose 9= Customer Specified Tube Material		O.D.  See Selection Charts  Imperial  02 = 1/8" 03 = 3/16" 04 = 1/4" 05 = 5/16" 06 = 3/8" 07 = 7/16" 08 = 1/2" 10 = 5/8" 12 = 3/4" 16 = 1"  Metric  MA = 2mm MB = 4mm MC = 6mm MD = 8mm ME = 10mm MF = 12mm MG = 14mm MH = 16mm		Wall Thickness  See Selection Charts  Imperial  16=.016" 20=.020" 28=.028" 30=.030 31=.031" 32=.032" 35=.035" 40=.040" 47=.047" 49=.049" 50=.050" 62=.062" 65=.065" 83=.083"  Metric  89=.89mm 10=1.0mm 15=1.5mm 20=2.0mm 25=2.5mm		A= 1 Tube B= 2 Tubes C= 3 Tubes etc.  P = 2 Tube Parallel Design		V=FR-PVC T=FR-TPE U=FR-PUR P=PUR R=TPR E=FRPE L=LDPE F=PVDF  Note: Parflex standard jacket is FR-PVC		N=Black B=Blue G=Green O=Orange Y=Yellow P=Purple R=Red W=White  Note: Parflex standard color jacket is black  Note: For standard black FR-PVC jacketed products -VN may be dropped

\*Maximum Temperatures are Subject to Ambient Conditions (See Heater Selection Chart)



Part Number	Process Tube O.D. (in.)	Wall Thickness (in.)	Nominal Product O.D. (in.)	Product Weight (lbs./ft.)	Minimum Bend Radius (in.)	Watt Density per foot / Voltage	Circuit Length Ft @ 50°F Start-up / Breaker (amps)	Performance At Various Ambient Conditions	
#						Watt/Ft		At -40°F (-40°C) will maintain at least**	At 80°F (23.9°C) will maintain at least**
SH- Single Process Tube - Maximum Internal Exposure Temperature, Power off 400°F (204°C)									
SH512-B0435A	1/4	0.035	1.21	0.33	7	5 watt / 120V	360ft / 30A	40°F (4°C)	145°F (63°C)
SH512-B0635A	3/8	0.035	1.31	0.39	8	5 watt / 120V	360ft / 30A	40°F (4°C)	140°F (60°C)
SH512-B0835A	1/2	0.035	1.41	0.46	8	5 watt / 120V	360ft / 30A	40°F (4°C)	135°F (57°C)
SH812-B1249A	3/4	0.049	1.64	0.68	10	8 watt / 120V	285ft / 30A	40°F (4°C)	150°F (65°C)
SH- Dual Process Tube - Maximum Internal Exposure Temperature, Power off 400°F (204°C)									
SH512-B0435B	(2) 1/4	0.035	1.28	0.42	8	5 watt / 120V	360ft / 30A	40°F (4°C)	145°F (63°C)
SH512-B0635B	(2) 3/8	0.035	1.43	0.54	9	5 watt / 120V	360ft / 30A	40°F (4°C)	135°F (57°C)
SH812-B0835B	(2) 1/2	0.035	1.61	0.66	10	8 watt / 120V	285ft / 30A	40°F (4°C)	150°F (65°C)
SH812-B1239B	(2) 3/4	0.049	1.99	1.11	12	8 watt / 120V	285ft / 30A	40°F (4°C)	140°F (60°C)

\*Many other alloys available, as well as seamless stainless steel tubing. Product is also available in 208, 240 and 277V

\*\* In some cases, without use of a controller, this design could maintain higher temperatures at the ambient temperature shown.

\*\*The temperature maintained is based upon the watt density heater shown, higher watt density heaters could be used to achieve a greater maintenance temperatures.

#### FM – Factory Mutual

General Purpose - Ordinary Locations

Hazardous Locations, when installed with Parflex accessories.

- Class I, Div. 2, Groups B, C and D (gases, vapors)
- Class II, Div.2, Group F, G (Combustible dust)
- Class III, Div.2, (ignitable fibers and filings)

T-Temperature Ratings

- 3, 5 and 8 watt rated T3 temperature class
- 10, 15 and 20 watt rated T2D temperature class

#### CSA – Canadian Standards Association

CSA Certified for ordinary locations

for certified hazardous locations contact Parflex

**ATEX** - Certified Cables & accessories available

#### Electrical Specifications:

Operating Voltage: 120 V or 240V


Bus Wire Voltage Rating: 600 Volts

Bus Wire Size: 16 AWG


### Maximum Circuit Length (ft) at Start-up °F

High-Temp Cable Rating	50°F (10°C) Circuit Length In Feet				0°F (-18°C) Circuit Length In Feet				-20°F (-29°C) Circuit Length In Feet			
Circuit Breaker Size (Amps)	15	20	30	40	15	20	30	40	15	20	30	40
5 watt / 120V	180	240	360	375	165	220	330	375	155	210	310	375
5 watt / 240V	360	480	720	750	325	430	645	750	310	415	620	750
10 watt / 120V	95	125	190	250	90	110	175	250	85	100	170	245
10 watt / 240V	190	255	385	490	165	225	345	490	155	215	330	470
15 watt / 120V	70	95	145	190	65	85	125	165	60	80	120	150
15 watt / 240V	145	190	290	385	120	175	270	360	115	165	260	340
20 watt / 120V	60	75	115	155	50	65	105	140	45	65	100	135
20 watt / 240V	115	155	230	305	100	135	200	270	90	130	195	255

Performance Data—Single Process Tube

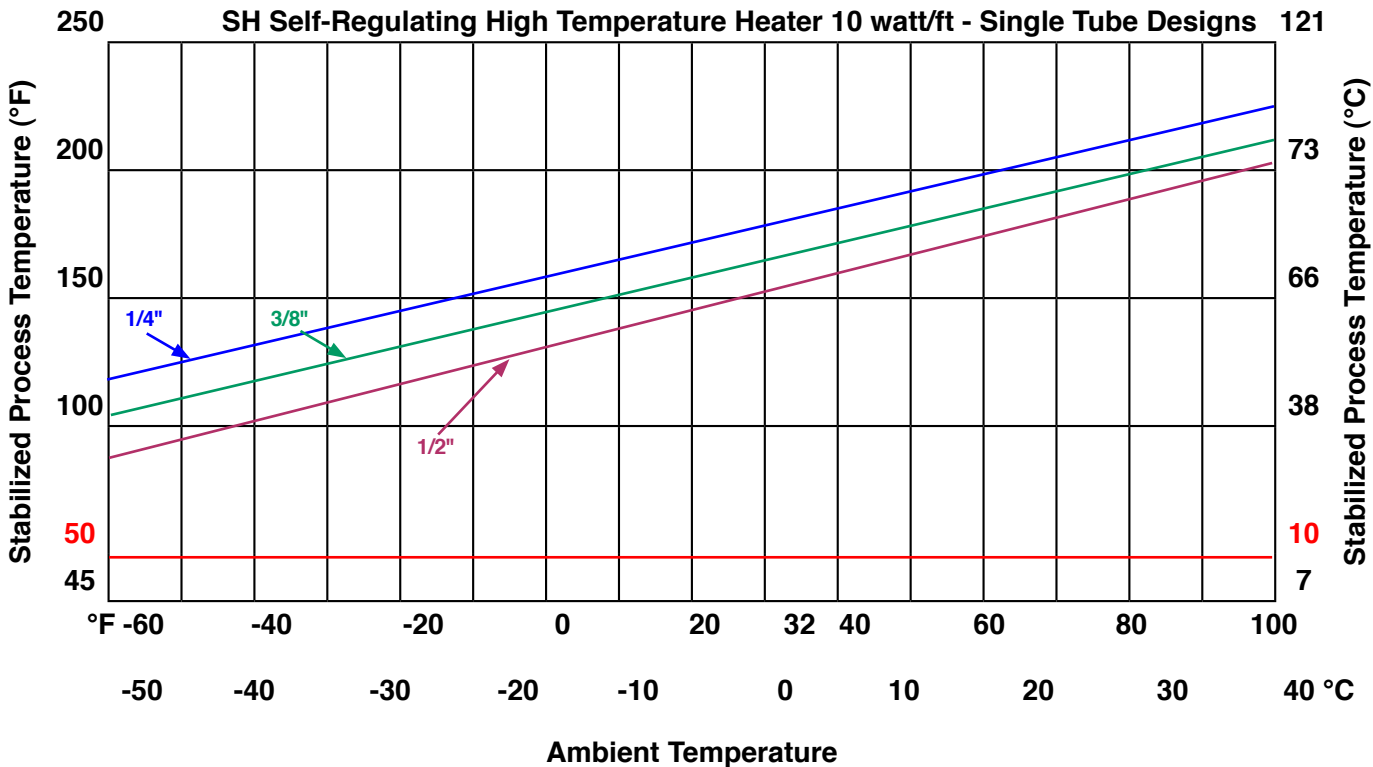

Performance Data—Dual Process Tube

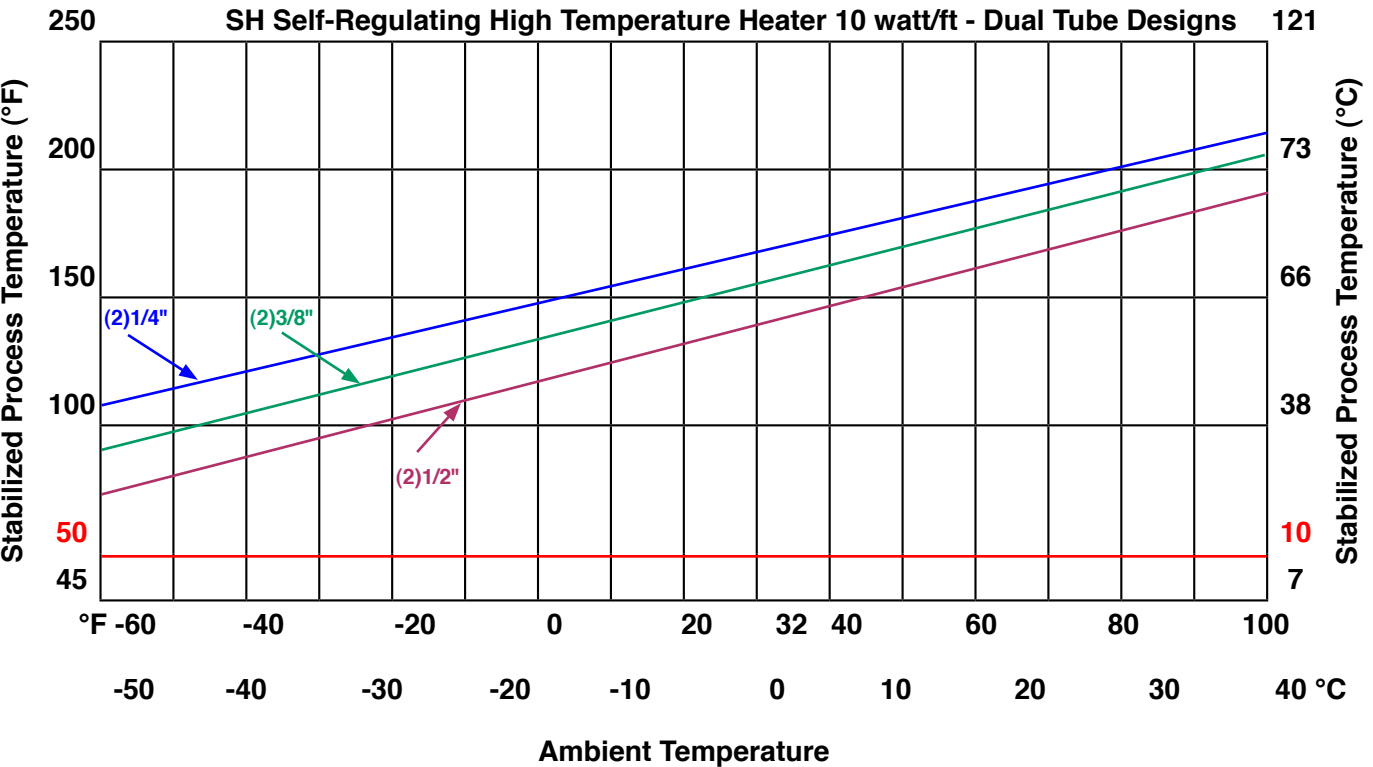

**SH Series Self-Regulating Bundles**  
**Maximum Exposure 400°F (204°C)**  
**Process Tubes 1/4" to 1/2" O.D. ( 6mm to 12mm)**  
**Single or Dual Tube Designs**

<b>**Minimum Process Temperature to Maintain</b>	<b>Standard Insulation Package *</b>				
	<b>Environments Average High / Low Ambient Conditions</b>				
	Extreme Cold	Cold	Moderate Cold	Moderate	Warm
	-65°F Low 80°F High	-40°F Low 80°F High	-10°F Low 95°F High	0°F Low 105°F High	10°F Low 115°F High
<b>120 Volts</b>	-54°C Low 26°C High	-40°C Low 26°C High	-24°C Low 35°C High	-18°C Low 40°C High	-13°C Low 46°C High
40°F (4°C)	8 Watt / Ft	8 Watt / Ft	5 Watt / Ft	3 Watt / Ft	3 Watt / Ft
50°F (10°C)	10 Watt / Ft	8 Watt / Ft	5 Watt / Ft	5 Watt / Ft	5 Watt / Ft
75°F (24°C)	15 Watt / Ft	10 Watt / Ft	8 Watt / Ft	8 Watt / Ft	8 Watt / Ft
100°F (38°C)	15 Watt / Ft	15 Watt / Ft	10 Watt / Ft	10 Watt / Ft	10 Watt / Ft
125°F (52°C)	20 Watt / Ft	20 Watt / Ft	15 Watt / Ft	15 Watt / Ft	15 Watt / Ft
150°F (66°C)			20 Watt / Ft	20 Watt / Ft	20 Watt / Ft
175°F (79°C)					20 Watt / Ft
<b>208 Volts</b>					
40°F (4°C)	10 Watt / Ft	8 Watt / Ft	5 Watt / Ft	5 Watt / Ft	3 Watt / Ft
50°F (10°C)	15 Watt / Ft	10 Watt / Ft	8 Watt / Ft	5 Watt / Ft	5 Watt / Ft
75°F (24°C)	15 Watt / Ft	15 Watt / Ft	10 Watt / Ft	8 Watt / Ft	8 Watt / Ft
100°F (38°C)	20 Watt / Ft	20 Watt / Ft	15 Watt / Ft	10 Watt / Ft	10 Watt / Ft
125°F (52°C)		20 Watt / Ft	20 Watt / Ft	15 Watt / Ft	15 Watt / Ft
150°F (66°C)				20 Watt / Ft	20 Watt / Ft
175°F (79°C)					20 Watt / Ft
<b>240 Volts</b>					
40°F (4°C)	8 Watt / Ft	8 Watt / Ft	5 Watt / Ft	3 Watt / Ft	3 Watt / Ft
50°F (10°C)	10 Watt / Ft	8 Watt / Ft	5 Watt / Ft	5 Watt / Ft	5 Watt / Ft
75°F (24°C)	15 Watt / Ft	10 Watt / Ft	8 Watt / Ft	8 Watt / Ft	8 Watt / Ft
100°F (38°C)	15 Watt / Ft	15 Watt / Ft	10 Watt / Ft	10 Watt / Ft	10 Watt / Ft
125°F (52°C)	20 Watt / Ft	20 Watt / Ft	15 Watt / Ft	15 Watt / Ft	15 Watt / Ft
150°F (66°C)			20 Watt / Ft	20 Watt / Ft	20 Watt / Ft
175°F (79°C)					20 Watt / Ft

\* The above heater cable selection is based upon our standard insulation package, other insulation packages are available to maintain higher temperatures.

\*\* The maintenance temperature could actually be higher depending upon the size and number of tubes required, it is recommended that for precise temperature control that a thermal sensor be used. Contact the factory for more exact product thermal property based upon your application conditions.

**How to Use:**

- 1) Check to be sure you are using the correct chart.
- 2) Choose your operating voltage.
- 3) Choose the minimum process temperature you want to maintain. Note: If temperature is not shown, pick the next higher option.
- 4) Follow chart across to the ambient Condition that best match your area.
- 5) Use the watt-density shown for your part number derivation.

**Note:**

The watt-density selected will maintain the temperature indicated at a minimum. Depending upon actual ambient fluctuations, process tubes size and number of tubes, the maintenance temperature could be higher.

**SH Series Self-Regulating Bundles**  
**Maximum Exposure 400°F (204°C)**  
**Process Tubes 3/4" to 1" O.D. (19mm to 25mm)**  
**Single Tube Designs (contact factory for multiple tubes)**

<b>**Minimum Process Temperature to Maintain</b>	<b>Standard Insulation Package *</b>				
	<b>Environments Average High / Low Ambient Conditions</b>				
	Extreme Cold	Cold	Moderate Cold	Moderate	Warm
	-65°F Low 80°F High	-40°F Low 80°F High	-10°F Low 95°F High	0°F Low 105°F High	10°F Low 115°F High
<b>120 Volts</b>	-54°C Low 26°C High	-40°C Low 26°C High	-24°C Low 35°C High	-18°C Low 40°C High	-13°C Low 46°C High
40°F (4°C)	10 Watt / Ft	8 Watt / Ft	5 Watt / Ft	5 Watt / Ft	3 Watt / Ft
50°F (10°C)	15 Watt / Ft	10 Watt / Ft	8 Watt / Ft	5 Watt / Ft	5 Watt / Ft
75°F (24°C)	15 Watt / Ft	15 Watt / Ft	10 Watt / Ft	8 Watt / Ft	8 Watt / Ft
100°F (38°C)	20 Watt / Ft	15 Watt / Ft	15 Watt / Ft	15 Watt / Ft	10 Watt / Ft
125°F (52°C)		20 Watt / Ft	20 Watt / Ft	15 Watt / Ft	15 Watt / Ft
150°F (66°C)				20 Watt / Ft	20 Watt / Ft
<b>208 Volts</b>					
40°F (4°C)	15 Watt / Ft	10 Watt / Ft	8 Watt / Ft	5 Watt / Ft	5 Watt / Ft
50°F (10°C)	15 Watt / Ft	10 Watt / Ft	8 Watt / Ft	8 Watt / Ft	5 Watt / Ft
75°F (24°C)	20 Watt / Ft	15 Watt / Ft	15 Watt / Ft	10 Watt / Ft	10 Watt / Ft
100°F (38°C)		20 Watt / Ft	15 Watt / Ft	15 Watt / Ft	15 Watt / Ft
125°F (52°C)			20 Watt / Ft	20 Watt / Ft	20 Watt / Ft
<b>240 Volts</b>					
40°F (4°C)	10 Watt / Ft	8 Watt / Ft	5 Watt / Ft	5 Watt / Ft	3 Watt / Ft
50°F (10°C)	15 Watt / Ft	10 Watt / Ft	8 Watt / Ft	5 Watt / Ft	5 Watt / Ft
75°F (24°C)	15 Watt / Ft	15 Watt / Ft	10 Watt / Ft	8 Watt / Ft	8 Watt / Ft
100°F (38°C)	20 Watt / Ft	15 Watt / Ft	15 Watt / Ft	15 Watt / Ft	10 Watt / Ft
125°F (52°C)		20 Watt / Ft	20 Watt / Ft	15 Watt / Ft	15 Watt / Ft
150°F (66°C)				20 Watt / Ft	20 Watt / Ft

\* The above heater cable selection is based upon our standard insulation package, other insulation packages are available to maintain higher temperatures.

\*\* The maintenance temperature could actually be higher depending upon the size and number of tubes required, it is recommended that for precise temperature control that a thermal sensor be used. Contact the factory for more exact product thermal property based upon your application conditions.

## How to Use:

- 1) Check to be sure you are using the correct chart.
- 2) Choose your operating voltage.
- 3) Choose the minimum process temperature you want to maintain. Note: If temperature is not shown, pick the next higher option.
- 4) Follow chart across to the ambient Condition that best match your area.
- 5) Use the watt-density shown for your part number derivation.

## Note:

The watt-density selected will maintain the temperature indicated at a minimum. Depending upon actual ambient fluctuations, process tubes size and number of tubes, the maintenance temperature could be higher.

## 4041-2101 Temptrace Power Connection Kit with Junction Box

4041-2101 Temptrace Electric Power Connection Kit for SL and SH Series Self-Regulating Bundles



### Power Connection Kit Contains:

- 1 Molded junction box consisting of : Base - Box - Lid - Hardware
- 4 Heater grommets (grommet used based upon heater type)
- 1 Pipe strap 1" – 3-1/2"
- 1 RTV-103BLK
- 1 Three position terminal block
- 1 Mounting screw for terminal block
- 1 Caution label

**An easily installed combination power connection and waterproof seals for single and double tube bundles.**

**Caution:** The heater will come in contact with the power feed wires in the junction box. Make sure that the temperature rating of the power feed wire insulation is adequate for the heater used.

### Approvals:

FM – Factory Mutual Approved  
Ordinary Locations  
UL Listed  
Hazardous (Classified) Locations

Class I, Division 2, Groups B, C and D  
Class II, Division 2, Groups F and G  
Class III, Division 2

CSA Certified for use in ordinary areas

ATEX Approved Kits Available

### Ground Fault Equipment Protection Devices (GFEPDs):

The IEEE standard (515-1989) for heating cables requires the use of GFEPDs with a nominal 30 milliampere trip level for "piping systems in classified areas, those areas requiring a high degree of maintenance, or which may be exposed to physical abuse or corrosive atmospheres."

## 4041-5300 Temptrace Universal Kit for Self-Regulating Bundles

4041-5300 Temptrace Electric Splice or Tee  
Connection Kit for SL and SH Series  
Self-Regulating Bundles

### Connection Kit Contains:

- |   |                          |
|---|--------------------------|
| (1) 3/4" Pipe Stand                                   | (3) Ring Terminals       |
| (1) Sealing Grommet                                   | (2) Cable Entry Fittings |
| (4) Stainless Steel Pipe Straps<br>(2-large, 2-small) | (1) 3/4" Pipe Plug       |
| (1) 3 Hub Box   | (1) Grounding Screw      |
| (1) Box Cover   | (2) RTV-103BLK           |
| (6) Wire Nuts   | (1) SS Label             |
| (2) Butt Splice Connectors                            | (2) Reducing Bushings    |
| (1) SK-612 (Seal Patch Kit)                           | (3) 1" Heat Shrink Tubes |
|   | (3) 3" Heat Shrink Tubes |



**Kit can be used to make one input power connection or one input power splice connection or one splice/tee connection as well as two end termination and RTV for bundle end seal.**

**An easily installed combination power splice and tee for Self-Regulating Bundle.**

**Caution:** The heater will come in contact with the power feed wires in the junction box. Make sure that the temperature rating of the power feed wire insulation is adequate for the heater used.

### Ground Fault Equipment Protection Devices (GFEPDs):

The IEEE standard (515-1989) for heating cables requires the use of GFEPDs with a nominal 30 milliampere trip level for "piping systems in classified areas, those areas requiring a high degree of maintenance, or which may be exposed to physical abuse or corrosive atmospheres."



## 4041-6101 Electrical End Termination Kit for Self-Regulating Bundles

Parker electrical end termination kit (4041-6101) is designed to provide a method of terminating the non-powered end of the heating cable.

4041-6101 Use with Single Tube Bundle

4041-6102 Use with Two Tube Bundle

4041-6103 Use with Three Tube Bundle

4041-6104 Use with Four Tube Bundle



## 4041-8200 Electrical End Termination Kit for SL and SH Self-Regulating Bundles



Parker electrical end termination kit (4041-8200) is designed to provide a method of terminating the non-powered end of the heating cable.

Also in kit but not shown:

- 1 Caution label
- 1 Roll glass tape
- 3 Additional heat grommets



### Approvals:


FM – Factory Mutual Approved  
Ordinary Locations  
UL Listed  
Hazardous (Classified) Locations

Class I, Division 2, Groups B, C and D  
Class II, Division 2, Groups F and G  
Class III, Division 2

CSA Certified for use in ordinary areas and:  
Class I, Division 2, Groups A, B, C and D  
Class II, Division 2, Groups F and G

## Thermostats/Temperature Controllers

Each thermostat is an on/off mechanically actuated capillary and bulb type factory wired to open on temperature rise with terminal block wiring.

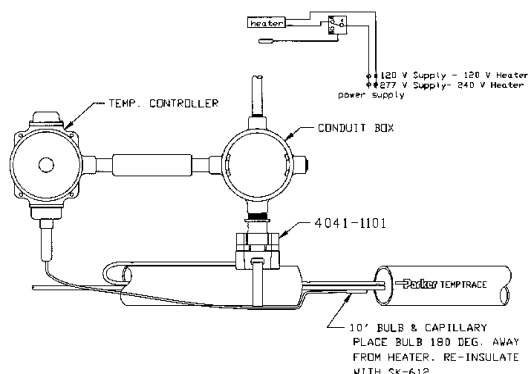

### 4012-01145 NEMA 4 Thermostat/ Temperature Controller



#### Specifications:

Temperature ..... Field Adjustable, Tamper proof +25 to +325°F  
(-3 to +162°C)  
Switch ..... 125/250/480 VAC – 22 amp SPDT Snap Acting  
Accuracy ..... ±1% of full scale, approximately 3°F (1.6°C)  
Capillary ..... 10 Ft. type 304 S.S.  
Bulb ..... 1/8" O.D. x 5/8" long type 304 S.S.  
Size ..... NEMA 4 x 4-1/4"H x 3-7/16W x 3-3/16D

Note: For further information and callout references, contact the Division.

### 4012-05145 NEMA 4x Thermostat/ Temperature Controller



#### Specifications:

Temperature ..... Field Adjustable, Tamper proof -125 to +500°F  
(-85 to +265°C)  
Switch ..... 120/240 VAC – 20 amp SPDT Snap Acting  
Accuracy ..... ±1% of full scale, approximately 3°F (1.6°C)  
Capillary ..... 6 Ft. type 304 S.S.  
Bulb ..... 3/8" O.D. x 2-1/4" long type 304 S.S.  
Size ..... NEMA 4 x 4-1/4"H x 3-7/16W x 3-3/16D

Note: For further information and callout references, contact the Division.

### 4012-01147 NEMA 7 Thermostat/ Temperature Controller



#### Specifications:

Temperature ..... Field Adjustable, Tamper proof +25 to 325°F  
(-3 to +162°C)  
Switch ..... 125/250/480 VAC – 22 amp SPDT Snap Acting  
Accuracy ..... ±1% of full scale, approximately 3°F (1.6°C)  
Capillary ..... 10 Ft. type 304 S.S.  
Bulb ..... 1/8" O.D. x 5/8" long type 304 S.S.  
Size ..... NEMA 7 5-1/16H x 5-1/8W x 5-1/4D

Note: For further information and callout references, contact the Division.

### 4012-06105 NEMA 4x Thermostat/ Temperature Controller




#### Specifications:

Temperature ..... Field Adjustable, Tamper proof +15 to +140°F  
(-9 to +60°C)  
Switch ..... 125/250/480 VAC – 22 amp SPDT Snap Acting  
Accuracy ..... ±1% of full scale, approximately 3°F (1.6°C)  
Bulb ..... Fluid filled stem  
NEMA Rating ..... NEMA 4 x

Note: For further information and callout references, contact the Division.

## Parker Temptrace™ Feed Through (PTFT) Kit

Parker PTFT kits provide a water tight seal where the heat trace tubing bundle enters into a junction box or instrument enclosure.



Molded Feed Through Part Number	Cable Range Min/Max	"A" Length Nominal	Cabinet Wall Thickness Max	Hole Size	"B" Feed Through Hole Size	"C" Minimum Expanded I.D.
PTFT 1.50	0.75 - 1.50" (19 - 38 mm)	4.5" (11.4 cm)	0.375" (9.5 mm)	2" (5.1 cm)	1.60" (4.1 cm)	1.70" (4.3 cm)
PTFT 2.00	0.75 - 2.0" (19 - 51 mm)	7.0" (17.8 cm)	0.375" (9.5 mm)	2.36" (6.0 cm)	2.10" (5.1 cm)	2.75" (7.0 cm)
PTFT 2.75	1.43 - 2.75" (19 - 70 mm)	7.0" (17.8 cm)	1.0" (25.4 mm)	3.50" (8.9 cm)	2.75" (7.0 cm)	2.75" (7.0 cm)

PVC Pipe Fitting Style Part Number	"C" Cable Range Min/Max	"A" Length Nominal	Cabinet Wall Thickness Max	Drill Hole Size	"B" Feed Through Hole Size
PTFT 3.25	1.50 - 3.25" (38 - 83 mm)	10" (25.4 cm)	1.125" (28.6 mm)	4.50" (11.4 cm)	3.50" (8.9 cm)
PTFT 4.50	2.00 - 4.50" (51 - 114 mm)	10" (25.4 cm)	1.25" (28.6 mm)	5.00" (12.0 cm)	4.50" (11.4 cm)
PTFT 5.0	2.00 - 5.00" (51 - 114 mm)	12" (30.5 cm)	1.125" (28.6 mm)	5.50" (13.2 cm)	5.00" (12.0 cm)



## Heat Shrinkable Boots (HSBs)

Parker heat shrink boots (HSB) are designed to prevent moisture from entering the ends of Parker Temptrace™ bundles. The dash number represents the number of breakouts in each boot. The boots can be used on 1/4", 3/8", or 1/2" tubes, or as a seal for the heating cable

**HSB-1****HSB-2**

Part Number	Before Heat Shrinking		After Heat Shrinking					
	Body I.D.	Leg(s) I.D.	Body			Leg(s)		
			I.D.	Thick	Length	*I.D.	Thick	Length
HSB-1	1.50	-	0.23	0.16	6.00	No Legs		
HSB-2	3.40	1.50	0.90	0.16	3.00	0.30	0.12	1.20
HSB-3	2.40	1.00	0.90	0.16	2.30	0.30	0.12	1.20
HSB-4	2.30	1.00	0.98	0.16	3.00	0.28	0.12	1.20
HSB-5	3.70	1.40	1.27	0.16	4.70	0.58	0.12	2.00
HSB-6	5.20	2.00	1.75	0.16	6.00	0.60	0.12	2.00

Grommet Selection Chart	
Part Number	Tube Size O.D. (inches)
GESKO-2	1/8
GESKO-4	1/4
GESKO-6	3/8
GESKO-8	1/2

\*Where "After Shrinking" I.D. is larger than tube size in bundle, a silicone grommet or RTV should be used in conjunction with the boot to ensure a complete seal. (See grommet selection list below or RTV data listed in this catalog.)

## Section 2 —

**IS – Intermittent\* Steam Purge Bundles  
for Freeze Protection**

Freeze Protection Bundles Designed For **Intermittent** (5 minutes) High-Temperature Steam Purge

**General Design**

Parflex IS-Intermittent Steam purge bundles are thermally insulated with a composite layer of fiberglass that allows for occasional high-temperature steam purge up to 1100°F (593°C) while at the same time ensuring freeze protection during winter using self-regulating heating cables.

Parflex IS-Intermittent Steam purge bundles are properly insulated to ensure that the outer surface area of the bundle is at or below 140°F (60°C), meeting NEC Personnel Protection Code 427.12, during steam purge conditions at the highest specified ambient temperature.

IS- Intermittent Steam purge bundles are designed to provide a freeze protection temperature of 40°F (4.4°C) at the lowest specified ambient temperature.

Parflex IS-Intermittent Steam product are readily available in single and double tube. The most common tube sizes requested being 3/8" and 1/2" Seamless Stainless Steel 316/316L/316H alloys in either an average wall specification ASTM A269 or minimum wall specification ASTM A213. Other alloys and standards are available.

We also have available many other sizes; including metric sizes 6 mm, 8mm, 10mm and 12mm. (See How-to-order)

**Testing**

All IS-Intermittent Steam products are pressure tested prior to shipment. Third party testing and witnessing is available upon request, including DNV, ABS and Lloyd's Register. Contact factory for complete details.

**Jacketing Materials**

Black UV resistant FR-PVC is our standard material, however other jacketing materials are available upon request, including non-halogenated FR-TPE and Urethanes. Color jackets are also available upon request. (See How-to-order)

**Heating Cables**

Cables are available in 120V and 208-277 volt, with Heat outputs of 5, 10, 15 and 20 watt/ft.

Parflex standard IS designs come with an internal tinned copper braid on the heating cable for grounding purpose and a Fluoropolymer jacket over the heater to provide additional protection against harsh environments.

**Intermittent Design \***

Bundles can be steam purged for a period of 5 minutes once a day. During steam purge the outer jacket surface temperature will not exceed 140°F (60°C).







## How To Order

## IS-Intermittent Steam Purge Bundles

Freeze Protection Bundles Designed For **Intermittent** (5 minutes) High-Temperature Steam Purge**IS - B 08 49 B - 5 1 2 C - V 4 B**

IS	Product Family	B	Process Tube Material	08	Process Tube Size	49	Process Tube Size	B	Number of Process Tubes	5	Maximum Steam Purge Temperature
	IS= Intermittent High Temperature Steam  ** Intermittent is defined as steam purge for 5 minutes or less		1= Smls Copper Type DHP Alloy No 122. ASTM B68-B75 2= Welded Stainless Steel Type 316/316L ASTM A269 3= Welded Stainless Steel Type 304 ASTM A269 B= Smls 316/316L ASTM A269 C= Smls 304 ASTM A269 D= Smls Monel Type 400 E= Smls Hastelloy C22 H= Smls 316H ASTM A213 I= Smls Incoloy 825 L= Electropolish Smls 316/316L ASTM A269 (10Ra Max) M= Smls 316/316L ASTM A213 S= Silco Smls 316/316L ASTM A269 P= PFA Fluoropolymer F= FEP Fluoropolymer T= TFE Fluoropolymer 7= Parflex 919 PTFE SS Braided Hose 9= Customer Specified Tube Material		O.D.  See Selection Charts  Imperial  02=1/8" 03=3/16" 04=1/4" 05=5/16" 06=3/8" 07=7/16" 08=1/2" 10=5/8" 12=3/4" 16=1"  Metric  MA=2mm MB=4mm MC=6mm MD=8mm ME=10mm MF=12mm MG=14mm MH=16mm		Wall Thickness  See Selection Charts  Imperial  16=.016" 20=.020" 28=.028" 30=.030" 31=.031" 32=.032" 35=.035" 40=.040" 47=.047" 49=.049" 50=.050" 62=.062" 65=.065" 83=.083"  Metric  89=.89mm 10=1.0mm 15=1.5mm 20=2.0mm 25=2.5mm		A= 1 Tube B= 2 Tubes C= 3 Tubes etc.  P= 2 Tube Parallel Design		1= 1,000°F 5= 550°F (288°C) 6= 650°F (343°C) 7= 750°F (399°C) 8= 850°F (454°C) 9= other D= 1100°F (593°C)  Note: For steam purges 400°F or less use Parker SL or SH Bundle Series. For temperatures above 1100°F contact factory.

1	Heating Cable Voltage	2	Area Classification	C	Average Environment Ambient Condition Range	V	Jacket Material	4	*Maximum Jacket Surface Temperature Design	B	Jacket Color
	1= 120VAC 2= 240VAC  * 240 volt cables can be powered at 208, 240 or 277 volts		1= Class I, Division 1 Areas  2= General Purpose/Class I, Division 2 Areas		Low/High  A= -40°F/80°F B= -20°F/95°F C= 0°F/105°F D= 10°F/115°F		V = FR-PVC T = FR-TPE U = FR-PUR P = PUR R = TPR E = FRPE L = LDPE F = PVDF  Note: Parflex standard jacket material is FR-PVC		4=140°F Jacket  140°F meets NEC 427.12 for personnel protection		N=Black B=Blue G=Green O=Orange Y=Yellow P=Purple R=Red W=White  Note: Parflex standard color jacket is black

Part Number	Process Tube O.D. (in.)	Wall Thickness (in.)	Nominal Product O.D. (in.)	Product Weight (lbs./ft.)	Min. Bend Radius (in.)	Watt Density per foot / Voltage	Circuit Length Ft @ 50°F Start-up / Breaker (amps), 120V	Performance At Low Ambient Conditions	Maximum Allowable Intermittent Steam Purge	Maximum Jacket Surface Temperature during Steam Purge & High Ambient 80°F (26.6°C)
#						Watt/FT		At -40°F (-40°C) will maintain at least freeze protection	Intermittent is 5 minutes steam purge per day.	
<b>IS- Single Process Tube - Seamless Stainless Steel, ASTM A269</b>										
IS-B0849A-612A-V4	(1) 1/2"	0.049"	1.93	0.59	12	10	250 Ft / 40 Amp	40°F (4.4°C)	650°F (343°C)	140°F (60°C)
IS-B0849A-712A-V4	(1) 1/2"	0.049"	2.01	0.61	12	10	250 Ft / 40 Amp	40°F (4.4°C)	750°F (399°C)	140°F (60°C)
IS-B0849A-812A-V4	(1) 1/2"	0.049"	2.09	0.62	13	15	190 Ft / 40 Amp	40°F (4.4°C)	850°F (454°C)	140°F (60°C)
IS-B0849A-912A-V4	(1) 1/2"	0.049"	2.09	0.62	13	15	190 Ft / 40 Amp	40°F (4.4°C)	950°F (510°C)	140°F (60°C)
<b>IS- Dual Process Tube - Seamless Stainless Steel, ASTM A269</b>										
IS-B0849B-612A-V4	(2) 1/2"	0.049"	2.25	0.88	13	10	250 Ft / 40 Amp	40°F (4.4°C)	650°F (343°C)	140°F (60°C)
IS-B0849B-712A-V4	(2) 1/2"	0.049"	2.33	0.89	14	10	250 Ft / 40 Amp	40°F (4.4°C)	750°F (399°C)	140°F (60°C)
IS-B0849B-812A-V4	(2) 1/2"	0.049"	2.33	0.89	14	15	190 Ft / 40 Amp	40°F (4.4°C)	850°F (454°C)	140°F (60°C)
IS-B0849B-912A-V4	(2) 1/2"	0.049"	2.41	0.90	14	15	190 Ft / 40 Amp	40°F (4.4°C)	950°F (510°C)	140°F (60°C)

\*Many other alloys available, as well as seamless stainless steel tubing. Product is also available in 208, 240 and 277V

\*\* As ambient conditions go above -40°F (-40°C) , without use of a controller the product could maintain higher temperatures.



## FM – Factory Mutual

General Purpose - Ordinary Locations  
Hazardous Locations, when installed with Parflex accessories.

- Class I, Div. 2, Groups B, C and D (gases, vapors)
- Class II, Div.2, Group F, G (Combustible dust)
- Class III, Div.2, (ignitable fibers and filings)

## T-Temperature Ratings

- 3, 5 and 8 watt rated T3 temperature class
- 10, 15 and 20 watt rated T2D temperature class

## CSA – Canadian Standards Association

CSA Certified for ordinary locations  
For certified hazardous locations contact Parflex

**ATEX** - Certified cables & accessories available

## Electrical Specifications:

Operating Voltage: 120 V or 240V  
Bus Wire Voltage Rating: 600 Volts  
Bus Wire Size: 14 AWG



## CS – Continuous Steam Purge Bundles for Freeze Protection

Freeze Protection Bundles Designed For **Continuous** High-Temperature Steam Purge Exposure



### General Design

Parflex CS-Continuous Steam purge bundles are thermally insulated with a composite layer of fiberglass that allows for continuous high-temperature steam purge up to 1100°F (593°C) while at the same time ensuring freeze protection during winter using self-regulating heating cables.

Parflex CS-Continuous Steam purge bundles are properly insulated to meet customer specified jacket surface temperature requirements, during the highest steam purge conditions and maximum ambient requested. (See How-to-Order)

CS-Continuous Steam purge bundles are designed to provide a freeze protection temperature of 40°F (4.4°C) at the lowest specified ambient temperature.

### Heating Cables

Cables are available in 120V and 208-277 volt, with Heat outputs of 5, 10, 15 and 20 watt/ft.

Parflex standard CS designs come with an internal tinned copper braid on heating cable for grounding purpose and a Fluoropolymer jacket over the heating cable to provide additional protection against many harsh environments.

### Continuous Steam Purge

Internal bundle tubes can be steam purged for any duration required without effecting performance to the heating element. The outer jacket surface temperature can vary depending upon customer design specifications. (See How-to-Order)

### Common Tube Materials and Sizes

Parflex CS-Continuous Steam products are readily available in single and double tube. The most common tube sizes requested being 3/8" and 1/2" Seamless Stainless Steel 316/316L/316H alloys in either an average wall specification ASTM A269 or minimum wall specification ASTM A213. Other alloys and standards are available.

We also have available many other sizes; including metric sizes 6 mm, 8mm, 10mm and 12mm. (See How-to-order)

### Testing

All CS-Intermittent Steam products are pressure tested prior to shipment. Third party testing and witnessing is available upon request, including DNV, ABS and Lloyd's Register. Contact factory for complete details.

### Jacketing Materials

Black UV resistant FR-PVC is our standard material, however other jacketing materials are available upon request, including non-halogenated FR-TPE and Urethanes. Color jackets are also available upon request. (See How-to-order)







# CS-Continuous High Temperature Steam Purge Bundles

Freeze Protection Bundles Designed For **Continuous** High-Temperature Steam Purge Exposure

**CS - B 08 49 B - 5 1 2 C - V 4 B**

CS	Product Family	B	Process Tube Material	08	Process Tube Size	49	Process Tube Size	B	Number of Process Tubes	5	Maximum Steam Purge Temperature
	CS= Continuous High Temperature Steam Purge		1= Smls Copper Type DHP A= 316/316L B68-B75 2= Welded Stainless Steel Type 316/316L ASTM A269 3= Welded Stainless Steel Type 304 ASTM A269  B= Smls 316/316L ASTM A269 C= Smls 304 ASTM A269 D= Smls Monel Type 400 E= Smls Hastelloy C22 H= Smls 316H ASTM A213 I= Smls Incoloy 825 L= Electropolish Smls 316/316L ASTM A269 (10Ra Max) M= Smls 316/316L ASTM A213 S= Silco Smls 316/316L ASTM A269 P= PFA Fluoropolymer F= FEP Fluoropolymer T= TFE Fluoropolymer  7= Parflex 919 PTFE SS Braided Hose 9= Customer Specified Tube Material		O.D.  See Selection Charts  Imperial  02=1/8" 03=3/16" 04=1/4" 05=5/16" 06=3/8" 07=7/16" 08=1/2" 10=5/8" 12=3/4" 16=1"  Metric  MA=2mm MB=4mm MC=6mm MD=8mm ME=10mm MF=12mm MG=14mm MH=16mm		Wall Thickness  See Selection Charts  Imperial  16=.016" 20=.020" 28=.028" 30=.030" 31=.031" 32=.032" 35=.035" 40=.040" 47=.047" 49=.049" 50=.050" 62=.062" 65=.065" 83=.083"  Metric  89=.89mm 10=1.0mm 15=1.5mm 20=2.0mm 25=2.5mm		A= 1Tube B= 2Tubes C= 3 Tubes etc.  P= 2 Tube Parallel Design		1= 1,000°F 5= 550°F (288°C) 6= 650°F (343°C) 7= 750°F (399°C) 8= 850°F (454°C) 9= other D= 1100°F (593°C)  Note: For steam purges 400°F or less use Parker SL or SH Bundle Series. For temperatures above 1100°F contact factory.

1	Heating Cable Voltage	2	Area Classification	C	Average Environment Ambient Condition Range	V	Jacket Material	4	Jacket Surface Temperature Design	B	Jacket Color
	1= 120VAC 2= 240VAC  * 240 volt cables can be powered at 208, 240 or 277 volts		1= Class I, Division 1 Areas  2= General Purpose/Class I, Division 2 Areas		Low/High  A= -40°F/80°F B= -20°F/95°F C= 0°F/105°F D= 10°F/115°F		V=FR-PVC T=FR-TPE U=FR-PUR P=PUR R=TPR E=FRPE L=LDPE F=PVDF  Note: Parflex standard jacket material is FR-PVC		4=140°F Jacket 6=160°F Jacket 8= 180°F Jacket  * Jacket surface temperature will not exceed this maximum when the bundle is operated at the designed steam purge temperature at the highest ambient design condition		N=Black B=Blue G=Green O=Orange Y=Yellow P=Purple R=Red W=White  Note: Parflex standard color jacket is black

Part Number	Process Tube O.D. (in.)	Wall Thickness (in.)	Nominal Product O.D. (in.)	Product Weight (lbs./ft.)	Min. Bend Radius (in.)	Watt Density per foot/ Voltage	Circuit Length Ft @ 50°F Start-up / Breaker (amps), 120V	Performance At Low Ambient Conditions	Maximum Allowable Continuous Steam Purge	Max. Jacket Surface Temp. during Steam Purge & High Ambient 80°F (26.6°C)
#						Watt/FT	 @ 120V*	At -40°F (-40°C) will maintain at least freeze protection	Continuous Steam Purge	
<b>CS — Continuous Steam Purge — Single Process Tube Seamless Stainless Steel, ASTM A269</b>										
CS-B0849A-612A-V8N	(1) 1/2"	0.049"	1.61	0.55	10	10	250 Ft. / 40 Amp	40°F (4.4°C)	650°F (343°C)	180°F (82°C)
CS-B0849A-712A-V8N	(1) 1/2"	0.049"	1.85	0.59	11	10	250 Ft. / 40 Amp	40°F (4.4°C)	750°F (399°C)	180°F (82°C)
CS-B0849A-812A-V8N	(1) 1/2"	0.049"	2.01	0.61	12	15	190 Ft. / 40 Amp	40°F (4.4°C)	850°F (454°C)	180°F (82°C)
CS-B0849A-912A-V8N	(1) 1/2"	0.049"	2.17	0.63	13	15	190 Ft. / 40 Amp	40°F (4.4°C)	950°F (510°C)	180°F (82°C)
<b>CS — Continuous Steam Purge — Dual Process Tube Seamless Stainless Steel, ASTM A269</b>										
CS-B0849B-612A-V8N	(2) 1/2"	0.049"	2.09	0.86	13	10	250 Ft. / 40 Amp	40°F (4.4°C)	650°F (343°C)	180°F (82°C)
CS-B0849B-712A-V8N	(2) 1/2"	0.049"	2.25	0.88	13	10	250 Ft. / 40 Amp	40°F (4.4°C)	750°F (399°C)	180°F (82°C)
CS-B0849B-812A-V8N	(2) 1/2"	0.049"	2.49	0.92	15	15	190 Ft. / 40 Amp	40°F (4.4°C)	850°F (454°C)	180°F (82°C)
CS-B0849B-912A-V8N	(2) 1/2"	0.049"	2.69	1.04	16	15	190 Ft. / 40 Amp	40°F (4.4°C)	950°F (510°C)	180°F (82°C)

\*Many other alloys available, as well as seamless stainless steel tubing. Product is also available in 208, 240 and 277V

\*\* As ambient conditions go above -40°F (-40°C) , without use of a controller the product could maintain higher temperatures.



### FM – Factory Mutual

General Purpose - Ordinary Locations

Hazardous Locations, when installed with Parflex accessories.

- Class I, Div. 2, Groups B, C and D (gases, vapors)
- Class II, Div.2, Group F, G (Combustible dust)
- Class III, Div.2, (ignitable fibers and filings)

### T-Temperature Ratings

- 3, 5 and 8 watt rated T3 temperature class
- 10, 15 and 20 watt rated T2D temperature class

### CSA – Canadian Standards Association

CSA Certified for ordinary locations

For certified hazardous locations contact Parflex

### ATEX - Certified Cables & accessories available

#### Electrical Specifications:

Operating Voltage: 120 V or 240V

Bus Wire Voltage Rating: 600 Volts

Bus Wire Size: 14 AWG

## Section 3 —

### CL— Constant Wattage Electric Trace Tubing — Low Temperature Maintenance

Maintain Temperatures up to 250°F (121°C) and withstand Maximum  
Internal Exposure up to 400°F (204°C)



#### General

Parker CL Constant Wattage Temptrace™ electric trace tubing consists of a process tube traced with a constant wattage heating cable, a heat transfer foil wrap, a nonhygroscopic glass fiber insulation and a black, 105° C rated, flame-resistant PVC (FR PVC) jacket.

Parker CL Constant Wattage Temptrace™ is designed for various temperature ranges including: Freeze protection and viscosity maintenance of 50° F (10° C) at ambient temperatures of -40° F (-40° C); and low process temperature maintenance of 160°F (71.1° C) to 250° F (121.1°C) @ -40° F (-40°C) to 80° F (26.7° C) ambient conditions. Standard product has a Maximum Temperature Rating (MTR\*) of 400° F (204.4° C), power-off and 250°F (121.1°C) Power on. See CH-Constant Watt design for higher temperature ranges.

\*Maximum Temperature Rating is the maximum allowable temperature of the tracing fluid. Temperatures in excess of this may damage the product or alter its performance.

#### Applications

Analyzer, impulse and instrument lines; small diameter process lines; stack gas sampling lines; and utility lines.

#### Tubing

Type 122 DHP Seamless Copper and 316/316L Welded and Seamless Stainless Steel, PFA, FEP and PTFE are standard. Wall thicknesses are available upon request. For Material Specifications of metal tubing, see *Technical Data* in Section of the catalog. Consult Division for details.

#### Heat Transfer Foil

An aluminum heat transfer foil for even heat distribution for precise temperature control.

#### Insulation

Air-spaced, cross wrapped applied non-hygroscopic fiberglass thermal insulation for minimum heat loss.

#### Jacket

The tough, black, 105° C rated, flame-resistant PVC (FR PVC) jacket protects the tubing against corrosive atmospheres, water, oils, acids, alkalies and most chemicals. Additional jacket materials are available upon request. For Material Specifications of jackets, see *Technical Data* in Section of the catalog. Consult Division for additional details.

#### Testing

Each tube in every length of Parker Temptrace™ is pressure tested prior to shipment to assure the instrument engineer a high quality, reliable, trouble-free product. For Testing Specifications, see *Technical Data* in Section of the catalog.

#### Accessories

Accessories are available for electrical connections, bundle splicing and end terminations. Accessories for constant wattage bundles are identified in this section. Detailed information on accessories can be found at [www.Parflex.com](http://www.Parflex.com).


#### Ordering

For information about how to specify and order, see How-to-Order in the catalog.

**NOTE:** It is absolutely necessary to seal the ends against contamination from moisture and/or corrosive liquids. Parker Hannifin cannot assume any liability for product damage caused by moisture from unsealed ends.

## Electrical Specifications:

Heater type	4 W./ft.	11.4W./ft.
Insulation	PFA Teflon® 600 V rated	PFA Teflon® 600V rated
Bus wire size	12 AWG	12 AWG
Heating zone length**	18" (45.7 cm) and 24" (61 cm)	

Part Number Series	Power Consumption W/ft (W/m)	Voltage	Maximum Circuit Length*** ft (m) 	Current A/ft (A/m)
CL	4 (13.1)	120	340 (103.6)	0.033 (0.108)
		240	680 (207.3)	0.017 (0.55)
CL	11.4 (37.4)	120	200 (61)	0.095 (0.312)
		240	400 (122)	0.0485 (0.156)

\*\*\*Based on 10% power drop.

For recommended temperature controller, see 4012-01145 (G.P. areas) and 4012-01147 (Hazardous locations).

### Approvals:

Ordinary Locations

FM – Factory Mutual Approved  
Hazardous (Classified) Locations  
FM – Factory Mutual Approved

Class I, Division 2, Groups B, C and D  
Class II, Division 2, Groups F and G  
Class III, Division 1 and 2

### Ground Fault Equipment Protection Devices (GFEPDs):

The IEEE standard (515-1989) for heating cables requires the use of GFEPDs with a nominal 30 milliampere trip level for “piping systems in classified areas, those areas requiring a high degree of maintenance, or which may be exposed to physical abuse or corrosive atmospheres.”


**For performance characteristics see next page.**

### \*\*Installation Note:

**Caution:** Cutting beyond heating zone indentation will result in an unheated section of the heater wire for the balance of the heating zone length. The bus wires **MUST NOT** be connected together on the termination end!


Performance Data—Single Process Tube

CL Constant Watt Low Temperature Heater 4 watt/ft - Single Tube Designs

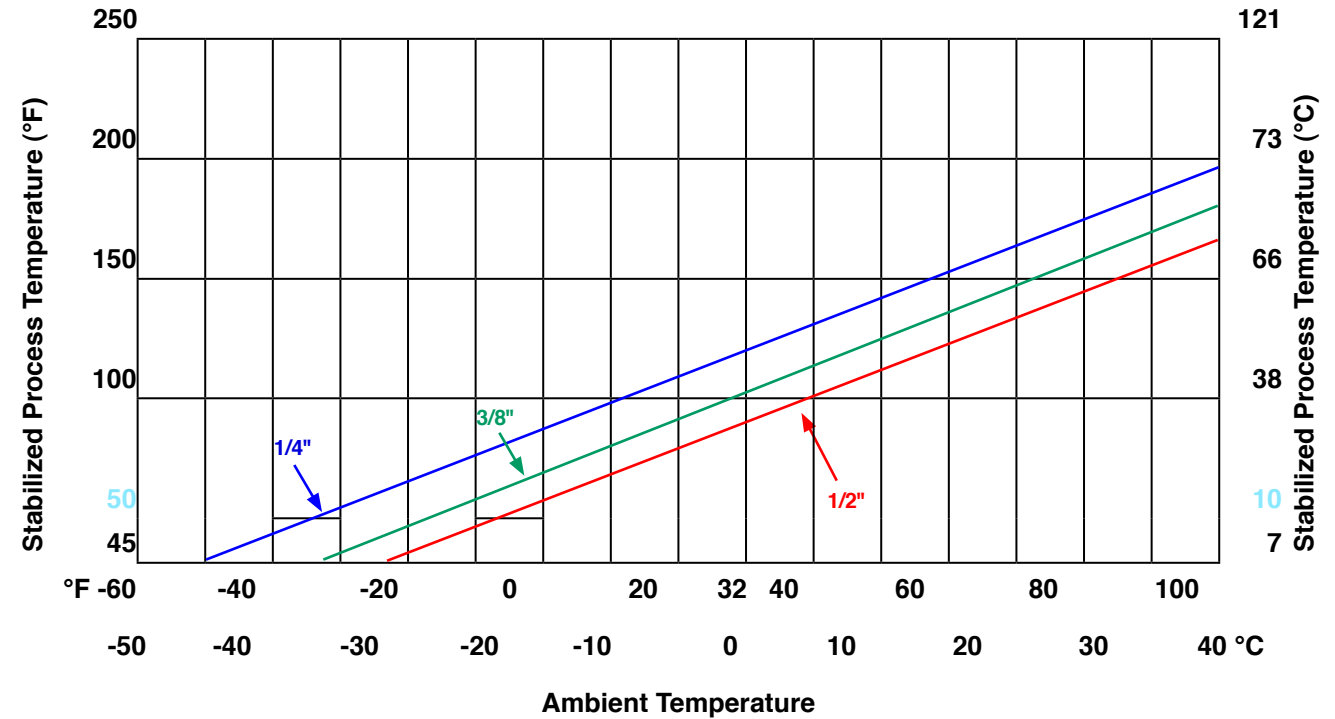

Performance Data—Dual Process Tube

CL Constant Watt Low Temperature Heater 4 watt/ft - Dual Tube Designs

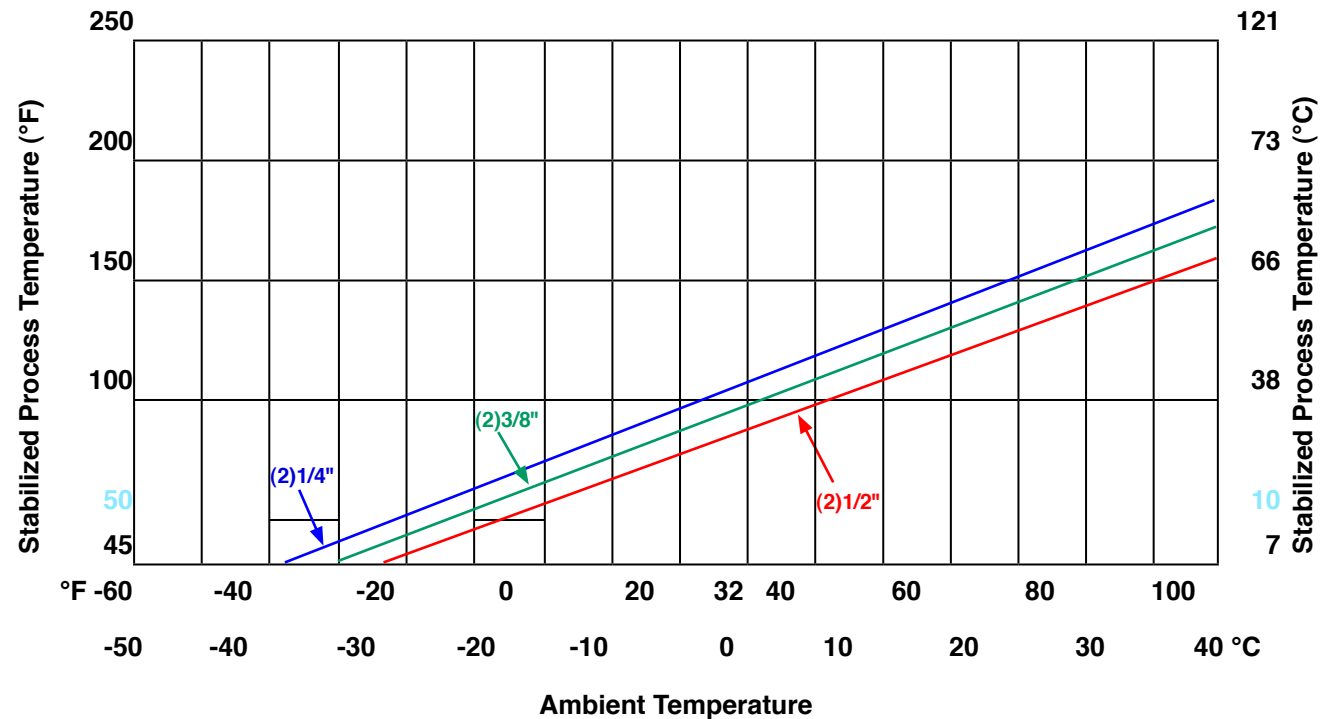



**How to Specify & Order****CL-Constant Watt Low Temperature Maintenance Electric Trace Bundles**

Maintain Temperatures up to 250°F (121°C) with a Maximum Internal Exposure up to 400°F\* (204°C)

**CL-412-B0835B-VB**

CL	Bundle Type	4	Heating Cable (Watt/ft)	1	Heating Cable Voltage	2	Area Classification	B	Process Tube Material
	CL= Constant Watt Low Temperature		See Selection Chart		1= 120VAC 2= 240VAC 8= 208VAC		2= General Purpose & FM Class I, Division 2 Areas		1= Smls Copper Type DHP Alloy No 122. ASTM B68-B75 2= Welded Stainless Steel Type 316/316L ASTM A269 3= Welded Stainless Steel Type 304 ASTM A269 B= Smls 316/316L ASTM A269 C= Smls 304 ASTM A269 D= Smls Monel Type 400 E= Smls Hastelloy C22 H= Smls 316H ASTM A213 I= Smls Incoloy 825 L= Electropolish Smls 316/316L ASTM A269 (10Ra) M= Smls 316/316L ASTM A213 S= Silco Smls 316/316L ASTM A269 P= PFA Fluoropolymer F= FEP Fluoropolymer T= TFE Fluoropolymer 7= Parflex 919 PTFE SS Braided Hose 9= Customer Specified Tube Material
			4= 4 watt 8= 8 watt 2= 11.4 watt C= 18 watt						

08	Process Tube Size	35	Process Tube Size	B	Number of Process Tubes	V	Jacket Material	B	Jacket Color
	O.D.		Wall Thickness		A= 1Tube B=2 Tubes C=3 Tubes etc.		V = FR-PVC T = FR-TPE U = FR-PUR P = PUR R = TPR E = FRPE L = LDPE F = PVDF		N=Black B=Blue G=Green O=Orange Y=Yellow P=Purple R=Red W=White
	See Selection Charts		See Selection Charts						
	Imperial		Imperial						
	02=1/8" 03=3/16" 04=1/4" 05=5/16" 06=3/8" 07=7/16" 08=1/2" 10=5/8" 12=3/4" 16=1"		16=.016" 20=.020" 28=.028" 30=.030 31=.031" 32=.032" 35=.035" 40=.040" 47=.047"						
			49=.049" 50=.050" 62=.062" 65=.065" 83=.083"						
	Metric		Metric		P= 2 Tube Parallel Design		Note: Parflex standard jacket material is FR-PVC		Note: Parflex standard color jacket is black  Note: For standard black FR-PVC jacketed product -VN may be dropped
	MA=2mm MB=4mm MC=6mm MD=8mm ME=10mm MF=12mm MG=14mm MH=16mm		89=.89mm 10=1.0mm 15=1.5mm 20=2.0mm 25=2.5mm						

## CL Series Constant Watt Bundles

Maximum Exposure 400°F (204°C)  
Process Tubes 1/4" to 1/2" O.D. (6mm to 12mm)  
Single or Dual Tube Designs

Minimum Process Temperature to Maintain	Standard Insulation Package *				
	Environments Average High / Low Ambient Conditions				
	Extreme Cold	Cold	Moderate Cold	Moderate	Warm
	-65°F Low 80°F High	-40°F Low 80°F High	-10°F Low 95°F High	0°F Low 105°F High	10°F Low 115°F High
120 Volts	-54°C Low 26°C High	-40°C Low 26°C High	-24°C Low 35°C High	-18°C Low 40°C High	-13°C Low 46°C High
40°F (4°C)	8 Watt / Ft	8 Watt / Ft	4 Watt / Ft	4 Watt / Ft	4 Watt / Ft
50°F (10°C)	11.4 Watt / Ft	8 Watt / Ft	8 Watt / Ft	4 Watt / Ft	4 Watt / Ft
75°F (24°C)	11.4 Watt / Ft	11.4 Watt / Ft	8 Watt / Ft	8 Watt / Ft	8 Watt / Ft
100°F (38°C)	18 Watt / Ft	11.4 Watt / Ft	11.4 Watt / Ft	8 Watt / Ft	8 Watt / Ft
125°F (52°C)	18 Watt / Ft	18 Watt / Ft	11.4 Watt / Ft	11.4 Watt / Ft	11.4 Watt / Ft
150°F (66°C)	18 Watt / Ft	18 Watt / Ft	18 Watt / Ft	18 Watt / Ft	11.4 Watt / Ft
175°F (79°C)		18 Watt / Ft	18 Watt / Ft	18 Watt / Ft	18 Watt / Ft
200°F (93°C)			18 Watt / Ft	18 Watt / Ft	18 Watt / Ft
225°F (107°C)			18 Watt / Ft	18 Watt / Ft	18 Watt / Ft
208 Volts					
40°F (4°C)	8 Watt / Ft	8 Watt / Ft	8 Watt / Ft	4 Watt / Ft	4 Watt / Ft
50°F (10°C)	11.4 Watt / Ft	8 Watt / Ft	8 Watt / Ft	4 Watt / Ft	4 Watt / Ft
75°F (24°C)	11.4 Watt / Ft	11.4 Watt / Ft	15 Watt / Ft	8 Watt / Ft	8 Watt / Ft
100°F (38°C)	18 Watt / Ft	11.4 Watt / Ft	15 Watt / Ft	8 Watt / Ft	8 Watt / Ft
125°F (52°C)		18 Watt / Ft	20 Watt / Ft	11.4 Watt / Ft	11.4 Watt / Ft
150°F (66°C)			18 Watt / Ft	11.4 Watt / Ft	11.4 Watt / Ft
175°F (79°C)				18 Watt / Ft	18 Watt / Ft
240 Volts					
40°F (4°C)	8 Watt / Ft	8 Watt / Ft	4 Watt / Ft	4 Watt / Ft	4 Watt / Ft
50°F (10°C)	11.4 Watt / Ft	8 Watt / Ft	8 Watt / Ft	4 Watt / Ft	4 Watt / Ft
75°F (24°C)	11.4 Watt / Ft	11.4 Watt / Ft	8 Watt / Ft	8 Watt / Ft	8 Watt / Ft
100°F (38°C)	18 Watt / Ft	11.4 Watt / Ft	11.4 Watt / Ft	8 Watt / Ft	8 Watt / Ft
125°F (52°C)	18 Watt / Ft	18 Watt / Ft	11.4 Watt / Ft	11.4 Watt / Ft	11.4 Watt / Ft
150°F (66°C)	18 Watt / Ft	18 Watt / Ft	18 Watt / Ft	18 Watt / Ft	11.4 Watt / Ft
175°F (79°C)		18 Watt / Ft	18 Watt / Ft	18 Watt / Ft	18 Watt / Ft
200°F (93°C)			18 Watt / Ft	18 Watt / Ft	18 Watt / Ft
225°F (107°C)			18 Watt / Ft	18 Watt / Ft	18 Watt / Ft

\* The above heater cable selection is based upon our standard insulation package, other insulation packages are available to maintain higher temperatures.

### How to Use:

- 1) Check to be sure you are using the correct chart.
- 2) Choose your operating voltage.
- 3) Choose the minimum process temperature you want to maintain.  
Note: If temperature is not shown, pick the next higher option.
- 4) Follow chart across to the ambient Condition that best match your area.
- 5) Use the watt-density shown for your part number derivation.

### Note:

The watt-density selected will maintain the temperature indicated at a minimum. Depending upon actual ambient fluctuations, process tubes size and number of tubes, the maintenance temperature could be higher.

## **CH— Constant Wattage Electric Trace Tubing — High Temperature Maintenance**

Maintain Temperatures up to 400°F (204°C) and withstands Maximum  
Internal Exposure to 400°F (204°C)



### **General**

Parker CH Constant Wattage Temptrace™ electric trace tubing consists of process tubes traced with a constant wattage heating cable, a heat transfer foil wrap, a nonhygroscopic glass fiber insulation and a black, 105° C rated, flame-resistant PVC (FR PVC) jacket.

Parker CH Constant Wattage Temptrace™ is designed for various temperature ranges including: Process temperature maintenance of 160° at -40° F (-40° C) ambient temperatures to 400°F (204°C) at 80°F (26.7°C) ambient. Contact the factory for complete design capabilities for your application.

Standard product has a Maximum Temperature Rating (MTR\*) of 400° F (204.4° C), Power-On. Consult Division for details.

\*Maximum Temperature Rating is the maximum allowable temperature of the tracing fluid. Temperatures in excess of this may damage the product or alter its performance.

### **Applications**

Analyzer, impulse and instrument lines; small diameter process lines; stack gas sampling lines; and utility lines.

### **Tubing**

Type 122 DHP Seamless Copper and 316/316L Welded and Seamless Stainless Steel, FEP, PFA and PTFE are standard. Special wall thicknesses are available upon request. For Material Specifications of metal tubing, see Technical Data Section.

### **Tubing Identification**

When process tubes are the same size and materials, each individual tube is printed with tube number at two-inch intervals or color code.

### **Heat Transfer Foil**

An aluminum heat transfer foil for even heat distribution for precise temperature control.

### **Insulation**

Air-spaced, cross wrapped applied non-hygroscopic fiberglass thermal insulation for minimum heat loss.

### **Jacket**

The tough, black, 105° C rated, flame-resistant PVC (FR PVC) jacket protects the tubing against corrosive atmospheres, water, oils, acids, alkalies and most chemicals. Additional jacket materials are available upon request. For Material Specifications of jackets, see Technical Data Section of the catalog.

### **Testing**

Each tube in every length of Parker Temptrace™ is pressure tested prior to shipment to assure the instrument engineer a high quality, reliable, trouble-free product. For Testing Specifications, see Technical Data Section of the catalog.

### **Accessories**

Accessories are available for electrical connections, bundle splicing and end terminations. Accessories for constant wattage bundles are identified in this section.

### **Ordering**

For information about how to specify and order, see How-To-Order page.

**NOTE: It is absolutely necessary to seal the ends against contamination from moisture and/or corrosive liquids. Parker Hannifin cannot assume any liability for product damage caused by moisture from unsealed ends.**

## Electrical Specifications:

Heater type	12 W./ft.	18 W./ft.
Insulation	Kapton®	Kapton®
Bus wire size	12 AWG	12 AWG
Heating zone length**	Average 48" (121.9 cm) for high temperature Kapton® insulated heater wires	

Part Number Series	Power Consumption W/ft (W/m)	Voltage	Maximum Circuit Length*** ft (m)	Current A/ft (A/m)
CH	12 (39.3)	120	180 (54.9)	0.100 (0.3281)
		240	360 (109.7)	0.050 (0.164)
CH	18.0 (58.95)	120	147 (44.8)	0.150 (0.49)
		240	294 (89.6)	0.075 (0.246)

\*\*\*Based on 10% power drop.

For recommended temperature controller, see 4012-01145 (G.P. areas) and 4012-01147 (Hazardous locations) in Section F.

### Approvals:

Ordinary Locations

FM – Factory Mutual Approved

Hazardous (Classified) Locations

FM – Factory Mutual Approved

Class I, Division 2, Groups B, C and D

Class II, Division 2, Groups F and G



Class III, Division 1 and 2

### Ground Fault Equipment Protection Devices (GFEPDs):

The IEEE standard (515-1989) for heating cables requires the use of GFEPDs with a nominal 30 milliampere trip level for “piping systems in classified areas, those areas requiring a high degree of maintenance, or which may be exposed to physical abuse or corrosive atmospheres.”

### \*\*Installation Note:

**Caution:** Cutting beyond heating zone indentation will result in an unheated section of the heater wire for the balance of the heating zone length. The bus wires **MUST NOT** be connected together on the termination end!

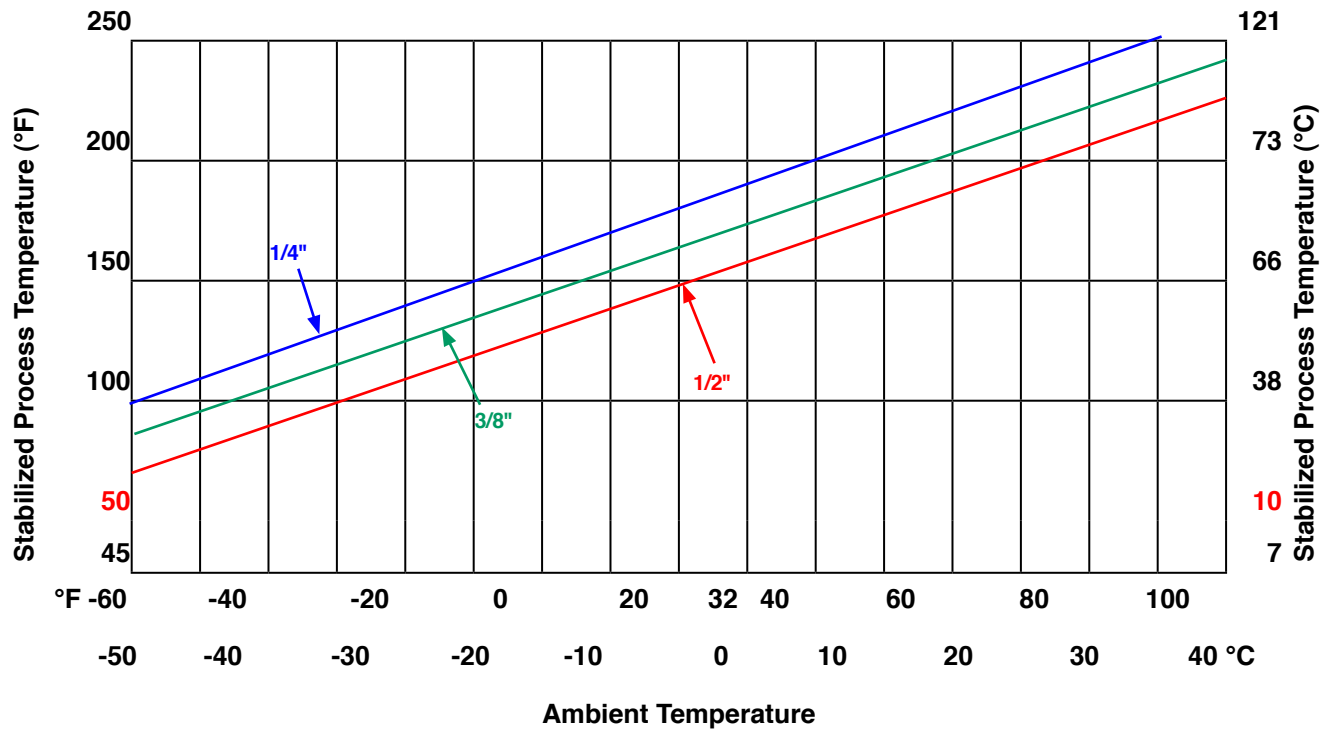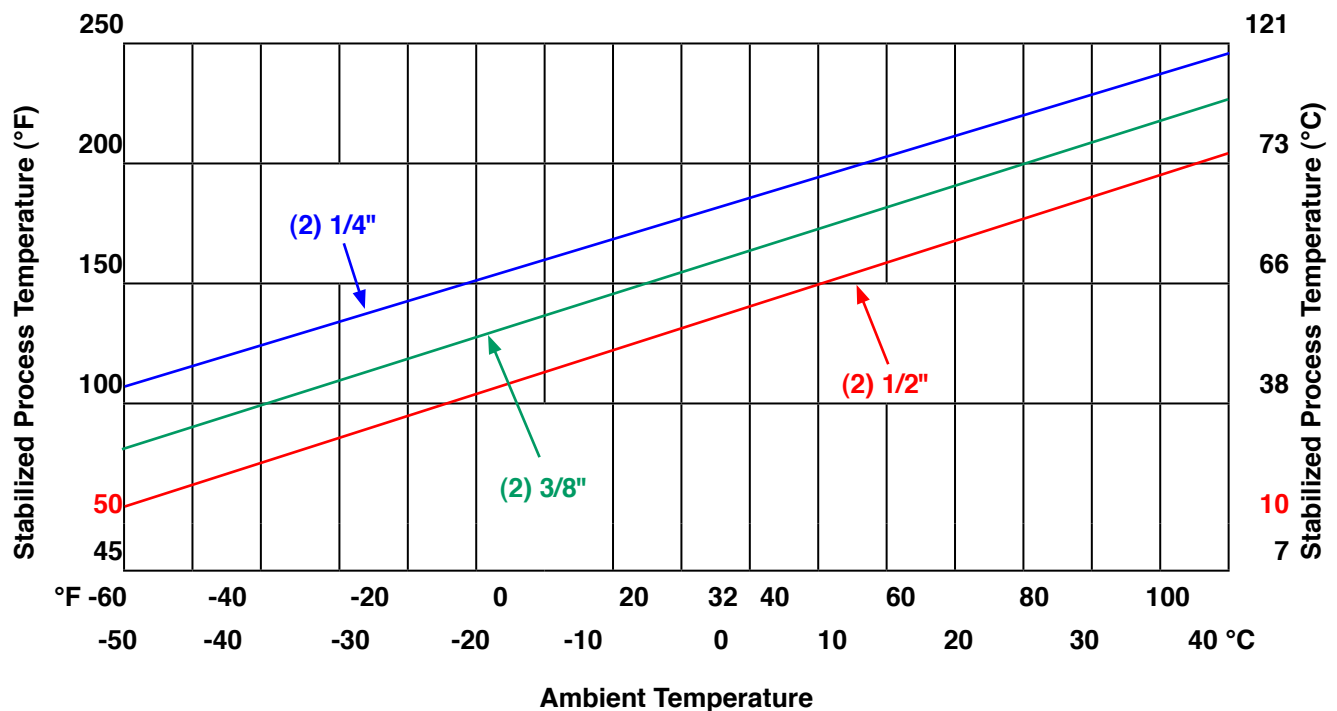**Performance Data—Single Process Tube****CH Constant Watt Low Temperature Heater 8 watt/ft - Single Tube Designs****Performance Data—Dual Process Tube****CH Constant Watt High Temperature Heater 8 watt/ft - Dual Tube Designs**

## CH-Constant Watt High Temperature Maintenance Electric Trace Bundles

Maintain Temperatures up to 400°F (204°C) with a Maximum Internal Exposure up to 400°F (204°C)

**CH - 4 1 2 - B 08 35 B - V B**

CH	Bundle Type	4	Heating Cable (Watt/ft)	1	Heating Cable Voltage	2	Area Classification	B	Process Tube Material
	CH= Constant Watt High Temperature		See Selection Chart  4= 4 watt 2= 12 watt C= 18 watt 8= 8 watt		1= 120VAC 2= 240VAC 8= 208VAC		2= General Purpose & FM Class I, Division 2 Areas		1= Smis Copper Type DHP Alloy No 122. ASTM B68-B75 2= Welded Stainless Steel Type 316/316L ASTM A269 3= Welded Stainless Steel Type 304 ASTM A269 B= Smis 316/316L ASTM A269 C= Smis 304 ASTM A269 D= Smis Monel Type 400 E= Smis Hastelloy C22 H= Smis 316H ASTM A213 I= Smis Incoloy 825 L= Electropolish Smis 316/316L ASTM A269 (10Ra) M= Smis 316/316L ASTM A213 S= Silco Smis 316/316L ASTM A269 P= PFA Fluoropolymer F= FEP Fluoropolymer T= TFE Fluoropolymer  7= Parflex 919 PTFE SS Braided Hose  9= Customer Specified Tube Material

08	Process Tube Size	35	Process Tube Size	B	Number of Process Tubes	V	Jacket Material	B	Jacket Color
	O.D.		Wall Thickness						
	See Selection Charts		See Selection Charts		A= 1 Tube B= 2 Tubes C= 3 Tubes etc.		V=FR-PVC T=FR-TPE U=FR-PUR P=PUR R=TPR E=FRPE L=LDPE F=PVDF		N=Black B=Blue G=Green O=Orange Y=Yellow P=Purple R=Red W=White
	Imperial		Imperial						
	02=1/8" 03=3/16" 04=1/4" 05=5/16" 06=3/8" 07=7/16" 08=1/2" 10=5/8" 12=3/4" 16=1"		16=.016" 20=.020" 28=.028" 30=.030 31=.031" 32=.032" 35=.035" 40=.040" 47=.047" 49=.049" 50=.050" 62=.062" 65=.065" 83=.083"		P= 2 Tube Parallel Design		Note: Parflex standard jacket material is FR-PVC		Note: Parflex standard color jacket is black  Note: For standard black FR-PVC jacketed product -VN may be dropped
	Metric		Metric						
	MA=2mm MB=4mm MC=6mm MD=8mm ME=10mm MF=12mm MG=14mm MH=16mm		89=.89mm 10=1.0mm 15=1.5mm 20=2.0mm 25=2.5mm						

**CH Series Constant Watt Bundles**  
**Maximum Exposure 400°F (200°C)**  
**Process Tubes 1/4" to 1/2" O.D. (6mm to 12mm)**  
**Single or Dual Tube Designs**

Minimum Process Temperature to Maintain	Standard Insulation Package *				
	Environments Average High / Low Ambient Conditions				
	Extreme Cold	Cold	Moderate Cold	Moderate	Warm
	-65°F Low 80°F High	-40°F Low 80°F High	-10°F Low 95°F High	0°F Low 105°F High	10°F Low 115°F High
120 Volts	-54°C Low 26°C High	-40°C Low 26°C High	-24°C Low 35°C High	-18°C Low 40°C High	-13°C Low 46°C High
250°F (4°C)	18 Watt / Ft	18 Watt / Ft	18 Watt / Ft	12 Watt / Ft	12 Watt / Ft
275°F (10°C)	18 Watt / Ft	18 Watt / Ft	18 Watt / Ft	18 Watt / Ft	12 Watt / Ft
300°F (24°C)	18 Watt / Ft	18 Watt / Ft	18 Watt / Ft	18 Watt / Ft	18 Watt / Ft
325°F (38°C)	18 Watt / Ft	18 Watt / Ft	18 Watt / Ft	18 Watt / Ft	18 Watt / Ft
350°F (52°C)		18 Watt / Ft	18 Watt / Ft	18 Watt / Ft	18 Watt / Ft
375°F (66°C)			18 Watt / Ft	18 Watt / Ft	18 Watt / Ft
400°F (79°C)				18 Watt / Ft	18 Watt / Ft
208 Volts					
250°F (4°C)	18 Watt / Ft	18 Watt / Ft	12 Watt / Ft	12 Watt / Ft	12 Watt / Ft
275°F (10°C)	18 Watt / Ft	18 Watt / Ft	18 Watt / Ft	18 Watt / Ft	12 Watt / Ft
300°F (24°C)	18 Watt / Ft	18 Watt / Ft	18 Watt / Ft	18 Watt / Ft	18 Watt / Ft
325°F (38°C)	18 Watt / Ft	18 Watt / Ft	18 Watt / Ft	18 Watt / Ft	18 Watt / Ft
350°F (52°C)		18 Watt / Ft	18 Watt / Ft	18 Watt / Ft	18 Watt / Ft
375°F (66°C)			18 Watt / Ft	18 Watt / Ft	18 Watt / Ft
400°F (79°C)				18 Watt / Ft	18 Watt / Ft
240 Volts					
250°F (4°C)	18 Watt / Ft	18 Watt / Ft	12 Watt / Ft	12 Watt / Ft	12 Watt / Ft
275°F (10°C)	18 Watt / Ft	18 Watt / Ft	18 Watt / Ft	18 Watt / Ft	12 Watt / Ft
300°F (24°C)	18 Watt / Ft	18 Watt / Ft	18 Watt / Ft	18 Watt / Ft	18 Watt / Ft
325°F (38°C)	18 Watt / Ft	18 Watt / Ft	18 Watt / Ft	18 Watt / Ft	18 Watt / Ft
350°F (52°C)		18 Watt / Ft	18 Watt / Ft	18 Watt / Ft	18 Watt / Ft
375°F (66°C)			18 Watt / Ft	18 Watt / Ft	18 Watt / Ft
400°F (79°C)				18 Watt / Ft	18 Watt / Ft

\* The above heater selection is based upon our standard insulation package, other insulation packages are available upon request.  
 All CH series products should be installed with temperature sensor and over temperature protection devices to prevent overheating.

**How to Use:**

- 1) Check to be sure you are using the correct chart.
- 2) Choose your operating voltage.
- 3) Choose the minimum process temperature you want to maintain.  
 Note: If temperature is not shown, pick the next higher option.
- 4) Follow chart across to the ambient Condition that best match your area.
- 5) Use the watt-density shown for your part number derivation.

**Note:**

The watt-density selected will maintain the temperature indicated at a minimum. Depending upon actual ambient fluctuations, process tubes size and number of tubes, the maintenance temperature could be higher.



## MI - Mineral Insulated Electric Trace Tubing — High Temperature Maintenance

Maintain Temperatures up to 900°F (482°C) and withstand Maximum  
Internal Exposure 1000°F (538°C)



### General

Parker MI-Mineral Insulated order-to-length series resistance MI Trace electric trace tubing consists of a single process tube electrically traced with a series resistance mineral insulated heating cable, a heat transfer foil wrap, a nonhygroscopic glass fiber insulation, and a black, 105° C rated, flame-resistant PVC (FR PVC) jacket.

Parker Mineral Insulated MI Trace is designed for various temperature ranges including: Freeze protection and viscosity maintenance of 40°F (4.4° C) to 80° F (26.7° C) at ambient temperatures down to -60°F (-51.1° C); and Process temperature maintenance of 120° F (48.9° C) to 170° F (76.7° C) at -60° F (-51.1°C) and 260° F (126.7° C) to 310° F (154.4° C) at 80° F (26.7° C).

Standard product has a Maximum Temperature Rating (MTR\*) of 400° F (204.4° C). Higher temperature rated designs are available. Consult Division for details.

\*Maximum Temperature Rating is the maximum allowable temperature of the tracing fluid. Temperatures in excess of this may damage the product or alter its performance.

### Applications

Analyzer, impulse and instrument lines; small diameter process lines; stack gas sampling lines; and utility lines.

### Tubing

Type 122 DHP Seamless Copper and 316/316L Welded and Seamless Stainless Steel are standard. Additional materials and wall thicknesses are available upon request. For Material Specifications of metal tubing, see Technical Data section of the catalog. Consult Division for details.

### Heat Transfer Foil

An aluminum heat transfer foil for even heat distribution for precise temperature control.

### Insulation

Air-spaced, cross wrapped applied non-hygroscopic fiberglass thermal insulation or high temperature composite dual insulation system for minimum heat loss.

### Jacket

The tough, black, 105° C rated, flame-resistant PVC (FR PVC) jacket protects the tubing against corrosive atmospheres, water, oils, acids, alkalies and most chemicals. Additional jacket materials are available upon request. For Material Specifications of jackets, see Technical Data section of the catalog. Consult Division for additional details.

### Testing

Each tube in every length of Parker Mineral Insulated trace is pressure tested prior to shipment to assure the instrument engineer a high quality, reliable, trouble-free product. For Testing Specifications, see Technical Data section of the catalog.

**Accessories**

Accessories are available for electrical connections, bundle splicing and end terminations. Accessories for mineral insulated bundles, consult the factory.

**Ordering:** For information about how to specify and order, see How-to-Order section.

**NOTE:** It is absolutely necessary to seal the ends against contamination from moisture and/or corrosive liquids. Parker Hannifin cannot assume any liability for product damage caused by moisture from unsealed ends.

**Electrical Specifications:**

Heater Type .....Series resistance, order to length  
 Operating Voltage .....120/208/240 VAC  
 MI Cable Construction ..Alloy 825 outer sheath, nickel clad copper bus wires, magnesium oxide insulation and nichrome heating element.

Maximum Exposure Temperature (heater cable only):  
 1200° F (650° C) power off 1000° F (538° C) power on (30 watts/ft. load)

Area classification... General purpose, Class I, Division 2, Groups A, B, C and D.

For recommended temperature controller, see 4012-01145 (G.P.areas) and 4012-01147 (Hazardous locations)

**Ground Fault Equipment Protection Devices (GFEPDs):**

The IEEE standard (515-1989) for heating cables requires the use of GFEPDs with a nominal 30 milliampere trip level for “piping systems in classified areas, those areas requiring a high degree of maintenance, or which may be exposed to physical abuse or corrosive atmospheres.”

**Approvals:**

FM – Factory Mutual Approved  
 Ordinary Locations  
 Hazardous (Classified) Locations

Class I, Division 2, Groups B, C and D  
 Class II, Division 2, Groups F and G  
 Class III, Division 1 and 2

## M—Mineral Insulated Electric Trace Bundles

Maintain Temperatures up to 900°F (482°C) with High Temperature Exposure up to 1000°F (538°C)

**M - 30 1 2 - B 08 49 B - V B - 125**

M	Bundle Type	30	Heating Cable (Watts/ft)	1	Heating Cable Voltage	2	Area Classification	B	Process Tube Material
	M= Mineral Insulated		Mfg. to determine watts based upon customer supplied criteria		1= 120VAC 2= 240VAC 8= 208VAC 7= 277VAC		2= General Purpose & FM Class I, Div.2 Areas		1= Smls Copper Type DHP Alloy No 122. ASTM B68/B75 2= Welded Stainless Steel Type 316/316L ASTM A269  3= Welded Stainless Steel Type 304 ASTM A269 B= Smls 316/316L ASTM A269 C= Smls 304 ASTM A269 D= Smls Monel Type 400 E= Smls Hastelloy C22 H= Smls 316H ASTM A213 I = Smls Incoloy 825 L= Electropolish Smls 316/316L ASTM A269 (10Ra) M= Smls 316/316L ASTM A213 S= Silco Smls 316/316L ASTM A269  P= PFA Fluoropolymer F= FEP Fluoropolymer T= TFE Fluoropolymer 7= Parflex 919 PTFE SS Braided Hose 9= Customer Specified Tube Material
			The Design Criteria Required is:						
			Maintain Temperature						
			Ambient Conditions (Low/High)						
			Max. Bundle Internal Exposure Temperature						

08	Process Tube Size	49	Process Tube Size	B	Number of Process Tubes	V	Jacket Material	B	Jacket Color	125	Installed Run Length Required
	O.D.		Wall Thickness				V = FR-PVC T = FR-TPE U = FR-PUR P = PUR R = TPR E = FRPE L = LDPE F = PVDF		N=Black B=Blue G=Green O=Orange Y=Yellow P=Purple R=Red W=White		=XXX (Length in feet)
	See Selection Charts		See Selection Charts		A= 1 Tube B= 2 Tubes C= 3 Tubes etc.						
	Imperial		Imperial		P= 2 Tube Parallel Design		Note: Parflex standard jacket material is FR-PVC		Note: Parflex standard color jacket is black		
	02=1/8" 03=3/16" 04=1/4" 05=5/16" 06=3/8" 07=7/16" 08=1/2" 10=5/8" 12=3/4" 16=1"		16=.016" 20=.020" 28=.028" 30=.030 31=.031" 32=.032" 35=.035" 40=.040" 47=.047" 49=.049" 50=.050" 62=.062" 65=.065" 83=.083"								
	Metric		Metric								
	MA=2mm MB=4mm MC=6mm MD=8mm ME=10mm MF=12mm MG=14mm MH=16mm		89=.89mm 10=1.0mm 15=1.5mm 20=2.0mm 25=2.5mm								

**Parker Electric Trace Design Criteria Quote Request**

Fax Inquiry To: Sales Office 330-296-6747
--

Date: \_\_\_\_\_ Customer Name: \_\_\_\_\_

Bundle Type: CL Trace ☐ (Low Temperature Maintenance up to 250° F (121° C))CH Trace ☐ (High Temperature Maintenance up to 400° F (204° C))MI Trace ☐ (High Temperature Maintenance over 1000° F (538° C))Total Quantity: \_\_\_\_\_ Feet ☐Meters ☐

Specified Lengths: \_\_\_\_\_

\_\_\_\_\_

Part Number: \_\_\_\_\_ (See How-to-Order in catalog.)

-----  
*If not sure of part number complete the following criteria:*

Maximum Temperature to be maintained: \_\_\_\_\_ ° ( )

Lowest ambient temperature: \_\_\_\_\_ ° ( )

Hottest ambient temperature: \_\_\_\_\_ ° ( )

What is the maximum internal process tube or steam purge temperature? \_\_\_\_\_ ° ( )

Process Tubes:

How many process tubes: \_\_\_\_\_

Size: (O.D. and wall thickness): \_\_\_\_\_ Inches ☐Tube Material: \_\_\_\_\_ Mm ☐

Trace Tube:

Size: (O.D. and wall thickness): \_\_\_\_\_ Inches ☐Tube Material: \_\_\_\_\_ Mm ☐Outer Jacket Type: (Note: Black FR-PVC is Standard)FR-PVC ☐ TPR ☐FR-TPE ☐ FRPE ☐FR-PUR ☐ LDPE ☐PUR ☐ PVDF ☐Area ClassificationGeneral Purpose ☐Class 1, Division 2 ☐Class 1, Division 1 ☐Approval AgencyFM ☐ CSA ☐ ATEX ☐

## Analyzer Bundles for Process Monitoring and Probe Control

### Design Selection

Heated CEMS products normally consist of two sections within the umbilical. The heated core and the unheated probe support section.

In some cases customers will choose to have these two sections broken down into separate umbilicals, however to reduce installation cost and time, many times all components are included in one control umbilical.

**Heated Core:** In many cases the heated core consists of two or three tubes, sample tubes, calibration tubes and possibly a spare. These tubes can be color coded for ease of identification.

Within the heated core a heating element will be positioned to ensure the most consistent and uniform heat transfer between all lines. The product can also be designed to include a temperature sensor device. The most common device used are 100 Ohm RTD's or Thermocouples.

Temperature sensors are placed at points along the heated core that allow for uniform heat control under various ambient and process conditions.

### Unheated Core Probe Support Section


The unheated section of the umbilical is at a temperature interface outside the heated core that allows for placement of probe support wires and unheated air lines and calibration lines.

Electrical probe support wires and even fiber-optic cables can be included within the area to offer a completed assembly.

Products are designed to your application specifications and can include any number and combination of tubing materials and electrical wire control.


We have outlined a special design questionnaire specifically tailored to assist you with designing a product that will meet your needs. (See Page 55)

### General Heated Bundle Design:

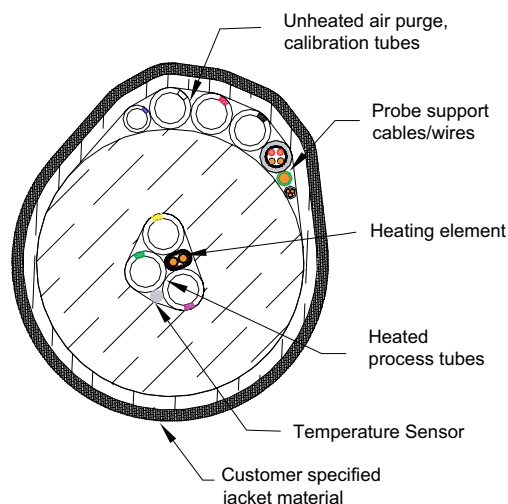

### General Probe Support Bundle Design

Energy Products Division is also a leading manufacturer of probe support umbilicals. These Multitube® bundles are made to the customers design requirements, with unheated tubes, electrical wires and probe temperature sensor wires, such as thermocouple extension cables.

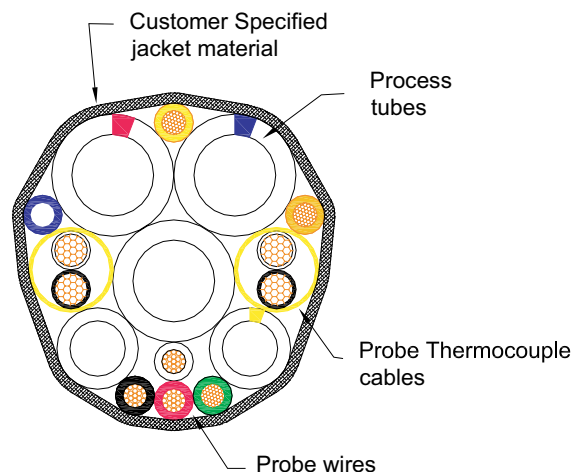

Probe support umbilicals can consist of any combination of tubes and sizes. The tubes will be uniquely identified for quick and accurate field connection. In many cases, probe support bundles will not see extreme heat, therefore more economical electrical wire material can be used, such as THHN cables or conductors.

Any of Energy Products Division umbilicals can be jacketed with the customer's specified material, including FR-TPE, FR-PVC and Urethane materials. (See the technical data section for jacket selection)

**Analyzer & Process Control Umbilical Design Form**

Individual Run Length:					Total Quantity Required:
_____ ft	_____ ft	_____ ft	_____ ft	_____ ft	_____ ft

Application (Check ☐)Non-Heated: ☐Freeze Protection: ☐ (Default: Maintain 40°F at -40°F)Temperature Maintenance: ☐

- 1) If heated, what temperature is to be maintained? (Of heated core) \_\_\_\_\_ ☐ °F ☐ °C
- 2) What is the low ambient temperature? \_\_\_\_\_ ☐ °F ☐ °C
- 3) What is the maximum exposure temperature? (Of heated core) \_\_\_\_\_ ☐ °F ☐ °C
- 4) What operating voltage is being used? \_\_\_\_\_ VAC
- 5) What breaker size is being used? \_\_\_\_\_ Amp
- 6) Do you have a heater preference? (SR, Constant Watt, VPL or MI) \_\_\_\_\_  
If not, Parker can recommend a heater based upon design criteria
- 7) Area Classification: ☐ Ordinary ☐ C1D2 ☐ Zone 2 ☐ Required T Rating \_\_\_\_\_
- 8) Approval Agency: ☐ FM ☐ CSA ☐ CE ☐ ATEX

**Heated Tube** Core Questions

- 1) Provide the number of **heated** tubes, size and material required.

Number of Tubes: \_\_\_\_\_ Size \_\_\_\_\_ Material \_\_\_\_\_ Colors \_\_\_\_\_

Number of Tubes: \_\_\_\_\_ Size \_\_\_\_\_ Material \_\_\_\_\_ Colors \_\_\_\_\_

Number of Tubes: \_\_\_\_\_ Size \_\_\_\_\_ Material \_\_\_\_\_ Colors \_\_\_\_\_

- 2) What type sensor do you want in the umbilical? ☐ RTD or ☐ Thermocouple

Where is sensor to be positioned? \_\_\_\_\_ Ft (From: ☐ Analyzer End or ☐ Probe End?)**Unheated Layer** Material Questions

- 9) What is the maximum exposure temperature of unheated elements? \_\_\_\_\_ ☐ °F ☐ °C

- 10) Provide the number of **unheated** tubes, size and material required.

Number of Tubes: \_\_\_\_\_ Size \_\_\_\_\_ Material \_\_\_\_\_ Colors \_\_\_\_\_

Number of Tubes: \_\_\_\_\_ Size \_\_\_\_\_ Material \_\_\_\_\_ Colors \_\_\_\_\_

Number of Tubes: \_\_\_\_\_ Size \_\_\_\_\_ Material \_\_\_\_\_ Colors \_\_\_\_\_

- 11) Do you need probe support or other electrical wires in umbilical?

Number of Wires: \_\_\_\_\_ Size \_\_\_\_\_ Material \_\_\_\_\_ Colors \_\_\_\_\_

Number of Wires: \_\_\_\_\_ Size \_\_\_\_\_ Material \_\_\_\_\_ Colors \_\_\_\_\_

- 12) What type outer jacket requested? (Black FR-PVC is standard) \_\_\_\_\_

## 4031-0001 Electrical Connection Kit for CL and 4031-0001B Electrical Connection Kit for CH Series Constant Wattage Temptrace



### Each Kit contains:

- |                                    |   |
|------------------------------------|---|
| 1 Connection Box                   | 1 Bracket Assembly                      |
| 1 Connection Box Gasket            | 2 Connector unions                      |
| 1 Connection Box Cover             | 2 Heating cable grommets                |
| 1 Mounting Bracket                 | 2 Plastic cable ties                    |
| 1 3/4" Locknut                     | 2 Non-insulated butt splice (12-10 AWG) |
| 1 3/4" Pipe Plug                   | 3 Non-insulated butt splice (16-14 AWG) |
| 1 "Electric Trace" caution sticker | 2 Heater termination boots              |
| 1 2.8 oz Black RTV Sealant         | 1 Roll 3/4" wide temperature tape       |

**Description:** Parker electrical connection kits are universal all-in-one connection kits for making the electrical connections (input power, splice, input power splice, and termination) for Parker electric trace tubing bundles. The kits contain all the necessary components and hardware to make one input connection, one splice connection or one input power splice connection as well as two termination connections. The connection kits are designed for use in ordinary locations and Class I, Division 2, Groups B, C, and D; Class II, Division 2, Groups F and G; Class III, Divisions 1 and 2 hazardous locations.

### Approvals:

FM – Factory Mutual Approved  
Ordinary Locations  
Hazardous (Classified) Locations

Class I, Division 2, Groups B, C and D  
Class II, Division 2, Groups F and G  
Class III, Division 1 and 2

### Ground Fault Equipment Protection Devices (GFEPDs):

The IEEE standard (515-1989) for heating cables requires the use of GFEPDs with a nominal 30 milliampere trip level for "piping systems in classified areas, those areas requiring a high degree of maintenance, or which may be exposed to physical abuse or corrosive atmospheres."

Refer to Section G for detailed installation instructions.



**Assembled Input Power Connection Kit**



**Assembled Input Power and Splice Connection Kit**




**Assembled Termination Connection Kit**



**Constant Watt Products Accessory Selections**

Product Family	Series	Accessory P/N	Description
<b>Constant Wattage Electric</b> Temptrace	CL & CH	4031-0001	Electrical Input Power / End Termination Kit
		4031-0001B	Electrical Input Power / End Termination Kit
		4012-01145	Line sensing general purpose area
			NEMA 4X temperature controller
		4012-01147	Line sensing hazardous location
			NEMA 7 temperature controller
		RTV-103BLK	End Sealant, 2.8 oz. tube, 400°F
		RTV-103BLK10.3	End Sealant, 10.1 oz. cartridge, 400°F
		RTV-106RED	End Sealant, 2.8 oz. tube, 500°F
		ESB	End Seal Boot, 400°F molded silicone
		SK-612	Splice or fitting / valve end termination kit (Insulation dimensions - 6" x 12")
		SK-630	Splice or fitting / valve end termination kit (Insulation dimensions - 6" x 30")
		SK-696	Splice or fitting / valve end termination kit (Insulation dimensions - 6" x 96")
		PTFT1.45 PTFT2.42	Parker Temptrace Feed Through seal kit (.79" - 1.45") (1.45" - 2.42")

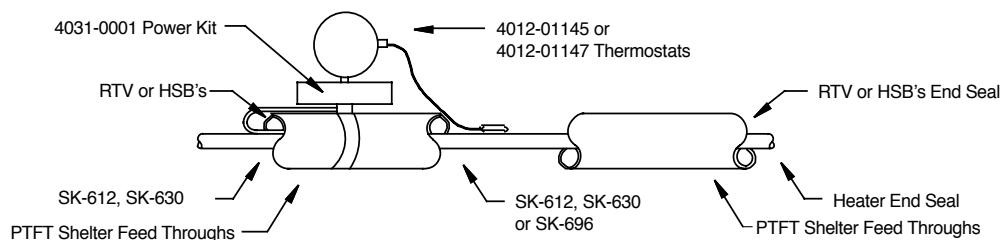

Constant Wattage Electric CL and CH Series

**Specifications Conformance****Electric Trace Tubing Products**

Parker Multitube Temptrace electric trace products conform to *Articles 427 and 500 of the National Electric Code*. Article 427 is entitled, "Fixed Electric Heating Equipment for Pipelines and Vessels." Article 500 is entitled, "Hazardous (classified) Locations," and contains definitions of specific occupancies by Class, Division and Group Location.

Parker Multitube Temptrace electric trace products also conform to IEEE Standard 515 entitled, "IEEE Recommended Practice for the Testing, Design, Installation and Maintenance of Electrical Resistance Heat Tracing for Industrial Applications."

**Ground Fault Equipment Protection Devices (GFEPDs):**

The IEEE standard (515-1989) for heating cables requires the use of GFEPDs with a nominal 30 milliampere trip level for "piping systems in classified areas, those areas requiring a high degree of maintenance, or which may be exposed to physical abuse or corrosive atmospheres."

## Section 4

## Metal and Plastic Multitube® Bundles



### General Design:

Energy Products Division Multitube® instrumentation tubing bundles are available in a variety of metal and plastic tubing materials.

Bundled tubing is an ideal alternative for applications where multiple lengths of tubing are currently being installed independently. Bundled tubing typically will save space within cabled trays, reduce the overall installation cost and offer protection to the individual tubes while being routed throughout a plant.

Multitube® bundles can be manufactured with a protective galvanized steel armor with or without an over jacket.

Galvanized steel armor offers supreme mechanical protection for the tubes in areas of the plant where crush resistance is needed, as well as for direct burial applications.

### Tubing Identification:

Plastic and Metal tubes are uniquely identified using a number code printed along the entire length of each tube. Each tube is uniquely numbered, making connections fast and accurate during installation.

Color-coding of tubes is also available upon special request.

### Jacket Material:

Our standard jacketing materials is a black 105°C rated, flame resistant PVC. FR-PVC offers tough protection against corrosive environments, water, oils, acids and alkaline chemicals. Other jacketing materials are available upon request.

### Testing:

Each tube in every length of bundle is pressure tested prior to shipment.

Metal tubes are pressure tested using dry N2 at 250psi for 5 minutes prior to shipment.

Plastic tubes are pressure tested using dry N2 at 125psi for 5 minutes.


Other testing and third party certifications are available upon request. Including ABS (American Bureau of Shipbuilding), DNV (Det Norske Veritas) and Lloyds. Contact the factory for details.

## Pressure Ratings-Metal Tubes\*

Tubing Type	Tube Size (in.)		Tubing Pressure Rating (PSI) Versus Temperature											
			100°F		200°F		300°F		400°F		500°F		600°F	
	O.D.	Wall	Burst	Opr.	Burst	Opr.	Burst	Opr.	Burst	Opr.	Burst	Opr.	Burst	Opr.
Copper Type DHP, Alloy No. 122, Soft Annealed Bright Seamless ASTM B68 and B75	1/4	.030	7230	1450	6630	1330	5730	1150	3620	730	-	-	-	-
	3/8	.032	5040	1010	4620	930	3990	800	2520	510	-	-	-	-
	1/2	.035	4050	810	3710	750	3200	640	2020	410	-	-	-	-
	1/2	.049	5900	1180	5400	1080	4700	940	2950	590	-	-	-	-
Stainless Steel, Type 316 Welded per ASTM A-269	1/4	.035	20100	5025	20100	5025	18200	4550	16900	4225	16300	4075	15900	3975
	3/8	.035	12800	3200	12800	3200	11600	2900	10800	2700	10400	2600	10200	2550
	1/2	.035	9400	2350	9400	2350	8500	2125	7900	1975	7600	1900	7500	1875
	1/2	.049	13500	3375	13500	3375	12300	3075	11400	2850	10900	2725	10700	2675
Stainless Steel, Type 316 Seamless per ASTM A-269	1/4	.035	23650	5910	23645	5910	23300	5825	19880	4970	19180	4795	18700	4675
	3/8	.035	15060	3765	15060	3765	13640	3410	12700	3175	12240	3060	12000	3000
	1/2	.035	11060	2765	11060	2765	10000	2500	9300	2325	8940	2235	8820	2205
	1/2	.049	15880	3970	15880	3970	14480	3620	13420	3355	12820	3205	12580	3145

\*All values are nominal, Pressure data is taken from American National Standards Code: ANSI B31.1 B30-1993A Edition

## Single Metal Tubing Jacketed

Product Series	Description	Part Number	Nominal Product O.D. (in.)	Standard Length (ft.)	Type of Package	Shipping Weight (lbs./100 ft.)**	Minimum Bend Radius (in.)	Product Weight (lbs./100 ft.)
 MJ - Metal Tube Jacketed	Copper Tubes: 1/4" O.D. x 0.030" Wall	1MJ-10430-50	0.32	50	Coil	5.4	2	9.7
		1MJ-10430-100		100	Coil	10.3		
		1MJ-10430-500		500	Coil	10.0		
		1MJ-10430-1000		1000	Coil	10.0		
	3/8" O.D. x 0.032" Wall	1MJ-10632-50	0.44	50	Coil	5.8	3	15.8
		1MJ-10632-100		100	Coil	16.8		
		1MJ-10632-500		500	Coil	16.3		
		1MJ-10632-1000		1000	Reel	16.3		
	1/2" O.D. x 0.035" Wall	1MJ-10835-50	0.57	50	Coil	6.3	4	23.0
		1MJ-10835-100		100	Coil	24.5		
		1MJ-10835-500		500	Reel	23.9		
		1MJ-10835-1000		1000	Reel	25.1		
	Welded Stainless Steel Tube 1/4" O.D. x 0.035" Wall	1MJ-20435-50	0.32	50	Coil	5.4	2	19.9
		1MJ-20435-100		100	Coil	20.4		
		1MJ-20435-500		500	Coil	20.2		
		1MJ-20435-1000		1000	Coil	20.1		
	3/8" O.D. x 0.035" Wall	1MJ-20635-50	0.44	50	Coil	5.8	3	24.5
		1MJ-20635-100		100	Coil	25.4		
		1MJ-20635-500		500	Coil	24.9		
		1MJ-20635-1000		1000	Reel	24.9		
	1/2" O.D. x 0.035" Wall	1MJ-20835-50	0.57	50	Coil	6.3	7	53.4
		1MJ-20835-100		100	Coil	54.8		
		1MJ-20835-500		500	Reel	54.3		
		1MJ-0835-1000		1000	Reel	55.4		

## Multiple Metal Tube Bundles

Product Series	Description	Part Number	Nominal Product O.D. (in.)	Jacket Thickness (in.)	Maximum Pulling Tension (lbs.)	Product Weight (lbs./100 ft.)	Minimum Bend Radius (in.)	Horizontal/Vertical Support Centers (ft.)
<b>MJ - Metal Tube Jacketed</b> 	<b>Copper Tubes:</b>  1/4" O.D. x 0.030" Wall	2MJ-10430	.64	.063	300	25	2.5	8
		4MJ-10430	.74	.063	600	43	2.5	8
		7MJ-10430	.89	.063	1050	70	3.5	12
		8MJ-10430	.97	.063	1200	81	3.5	12
		10MJ-10430	1.15	.063	1500	98	5.0	12
	3/8" O.D. x 0.032" Wall	2MJ-10632	.89	.063	500	40	5.5	8
		4MJ-10632	1.05	.063	1000	70	6.5	8
	1/2" O.D. x 0.035" Wall	2MJ-10835	1.15	.063	700	58	10.0	8
		3MJ-10835	1.26	.080	1050	84	11.0	8
		4MJ-10835	1.36	.080	1400	106	12.0	8
	<b>Welded Stainless Steel Tubes:</b> 1/4" O.D. x .035" Wall	2MJ-20435	0.64	.063	500	23.2	3.8	8
		3MJ-20435	0.68	.063	750	31.8	4.0	8
		4MJ-20435	0.74	.063	1000	40.4	4.2	8
		5MJ-20435	0.82	.063	1250	49.5	4.5	8
		7MJ-20435	0.89	.063	1750	66.5	5.3	12
		8MJ-20435	0.97	.063	2000	75.6	6.0	12
		10MJ-20435	1.15	.063	2500	93.9	7.5	12
		12MJ-20435	1.22	.080	3000	110.8	9.0	12
<b>MA - Metal Tube Armored</b> 	<b>Copper Tubes:</b>  1/4" O.D. x .030" Wall	1MA-10430	.49	Not Applicable	150	23	2.5	8
		2MA-10430	.74		300	44	2.5	8
		4MA-10430	.84		600	66	2.5	8
		7MA-10430	.99		1050	97	3.5	12
		8MA-10430	1.07		1200	111	3.5	12
	3/8" O.D. x .032" Wall	10MA-10430	1.25		1500	134	5.0	12
		1MA-10632	.61		250	33	5.5	8
		2MA-10632	.99		500	66	5.5	8
		4MA-10632	1.15		1000	102	6.5	8
		7MA-10632	1.37		1750	153	8.5	12
	<b>Welded Stainless Steel Tubes</b>	8MA-10632	1.49		2000	177	9.0	12
		10MA-10632	1.75		2500	212	12.0	12
		1MA-20435	.49		250	22.7	6.0	8
		2MA-20435	.74		500	40.7	5.2	8
		4MA-20435	.84		1000	61.1	5.9	8
	1/4" O.D. x .035" Wall	7MA-20435	.99		1750	91.9	7.0	12
		8MA-20435	1.07		2000	103.5	7.5	12
		10MA-20435	1.25		2500	127.5	8.8	12
<b>MAJ - Metal Tube Armored &amp; Jacketed</b> 	<b>Copper Tubes:</b>  1/4" O.D. x .030" Wall	1MAJ-10430	.56	.063	150	25	6.8	8
		2MAJ-10430	.87	.063	300	55	2.5	8
		4MAJ-10430	.97	.063	600	78	2.5	8
		7MAJ-10430	1.12	.063	1050	111	3.5	12
		8MAJ-10430	1.20	.063	1200	126	3.5	12
	3/8" O.D. x .032" Wall	10MAJ-10430	1.37	.063	1500	151	5.0	12
		1MAJ-10632	.67	.063	250	35.9	8.0	8
		2MAJ-10632	1.12	.063	500	81	5.5	8
		4MAJ-10632	1.28	.063	1000	119	6.5	8
		7MAJ-10632	1.53	.078	1750	179	8.5	12
	<b>Welded Stainless Steel Tubes</b>	8MAJ-10632	1.65	.078	2000	202	9.0	12
		10MAJ-10632	1.91	.078	2500	244	12.0	12
		1MAJ-20435	.56	.032	250	25.2	6.8	8
		2MAJ-20435	.87	.063	500	50.4	5.2	8
		4MAJ-20435	.97	.063	1000	72.0	5.9	8
	1/4" O.D. x .035" Wall	7MAJ-20435	1.12	.063	1750	104.7	7.0	12
		8MAJ-20435	1.20	.063	2000	117.0	7.5	12
		10MAJ-20435	1.37	.063	2500	143.5	8.8	12


## How to Specify & Order Metal Tubing Bundles



**4 MJ - 1 04 30 - U B**

<b>4</b>	<b>No. of Tubes</b>	<b>MJ</b>	<b>Product Design</b>	<b>1</b>	<b>Tube Material</b>
	1 = 1 Tube 2 = 2 Tube 3 = 3 Tube 4 = 4 Tube Etc...		MJ = Metal, Jacketed MA = Metal, Armored MAJ = Metal, Armor, Jacketed MJR = Metal, Jacketed, Round Cross-Section		1= Smls Copper Type DHP Alloy No 122. ASTM B68-B75 2= Welded Stainless Steel Type 316/316L ASTM A269 3= Welded Stainless Steel Type 304 ASTM A269 B= Smls 316/316L ASTM A269 C= Smls 304 ASTM A269 D= Monel Type 400 E= Hastelloy C22 H= Smls 316H ASTM A213 M= Smls 316/316L ASTM A213 9= Customer Specified Tube Material  All metal tubes are number coded along each tube for identification

<b>04</b>	<b>Tube Size (O.D.)</b>	<b>30</b>	<b>Tube Size (Wall Thickness)</b>	<b>U</b>	<b>Jacket Material</b>	<b>B</b>	<b>Jacket Color</b>
	02= 1/8" 03= 3/16" 04= 1/4" 05= 5/16" 06= 3/8" 07= 7/16" 08= 1/2" 10= 5/8" 12= 3/4" 16= 1"		16=.016" 20=.020" 28=.028" 30=.030" 31=.031" 32=.032" 35=.035" 40=.040" 47=.047" 49=.049" 50=.050" 62=.062" 65=.065" 83=.083"		V = FR-PVC T = FR-TPE U = FR-PUR P = PUR R = TPR E = FRPE L = LDPE K = PVDF		N = Black B = Blue G = Green O = Orange Y = Yellow P = Purple R = Red W = White
	Metric MA = 2mm MB = 4mm MC = 6mm MD = 8mm ME = 10mm MF = 12mm		Metric 89=.89mm 10=1.0mm 15=1.5mm 20=2.0mm 25=2.5mm		Note: Parflex standard jacket material is FR-PVC  For standard FR-PVC black, the -VN may be dropped		Note: Parflex standard color jacket is black

## Multiple Plastic Tube Bundles

Product Series	Description	Part Number	Number of Tubes	Jacket Thickness (in.)	Nominal Product O.D. (in.)	Minimum Bend Radius (in.)	Maximum Pulling Tension (lbs.)	Product Weight (lbs./100 ft.)
PJ - Plastic Tube Jacketed	 Polyethylene Tubes: 1/4" O.D. x .040" Wall	2PJ-E0440	2	.045	.59	1.5	90	8.6
		3PJ-E0440	3	.045	.60	1.5	110	11.4
		4PJ-E0440	4	.063	.74	2.0	140	12.8
		5PJ-E0440	5	.063	.88	2.0	170	15.1
		7PJ-E0440	7	.063	.89	2.5	195	17.5
		8PJ-E0440	8	.063	.97	2.5	235	19.5
		10PJ-E0440	10	.063	1.14	3.0	260	22.8
		12PJ-E0440	12	.063	1.14	3.5	300	25.4
		14PJ-E0440	14	.063	1.25	4.0	340	28.8
		19PJ-E0440	19	.080	1.40	5.0	425	36.8
		37PJ-E0440	37	.080	1.96	9.0	880	74.5
	Polyethylene Tubes: 3/8" O.D. x .062" Wall	2PJ-E0662	2	.063	.89	2.0	160	13.9
		3PJ-E0662	3	.063	.89	2.0	195	17.9
		4PJ-E0662	4	.063	1.05	2.5	265	21.1
		5PJ-E0662	5	.063	1.16	3.0	295	24.6
		7PJ-E0662	7	.080	1.31	4.0	365	29.7
		10PJ-E0662	10	.080	1.72	5.0	515	44.2
		12PJ-E0662	12	.080	1.80	6.0	685	60.8
		19PJ-E0662	19	.080	2.13	10.0	900	85.5

Product Series	Description	Part Number	Number of Tubes	Nominal Product O.D. (in.)	Minimum Bend Radius (in.)	Maximum Pulling Tension (lbs.)	Product Weight (lbs./100 ft.)	Horizontal/ Vertical Support Centers		
PA - Plastic Tube Armored 	Polyethylene Tubes: 1/4" O.D. x .040" Wall	2PA-E0440	2	.74	2.5	90	29	4		
		3PA-E0440	3	.78	2.5	110	32	4		
		7PA-E0440	7	.99	3.5	195	45	6		
		10PA-E0440	10	1.25	5.0	260	60	6		
		12PA-E0440	12	1.28	6.0	300	67	6		
		19PA-E0440	19	1.50	8.0	425	84	6		
		37PA-E0440	37	2.00	11.0	880	127	6		
	Polyethylene Tubes: 3/8" O.D. x .062" Wall	2PA-E0662	2	.99	5.5	160	43	4		
		3PA-E0662	3	1.05	6.0	195	48	4		
		10PA-E0662	10	1.75	12.0	515	101	6		
		12PA-E0662	12	1.81	12.5	685	109	6		
		19PA-E0662	19	2.13	15.0	900	141	6		
		PAJ - Plastic Tube Armored and Jacketed 	Polyethylene Tubes: 1/4" O.D. x .040" Wall	2PAJ-E0440	2	.87	2.5	90	39	4
				3PAJ-E0440	3	.90	2.5	110	42	4
7PAJ-E0440	7			1.12	3.5	195	58	6		
10PAJ-E0440	10			1.37	5.0	260	76	6		
12PAJ-E0440	12			1.44	6.0	300	88	6		
19PAJ-E0440	19			1.65	8.0	425	108	6		
37PAJ-E0440	37			2.16	11.0	880	159	6		
Polyethylene Tubes: 3/8" O.D. x .062" Wall	2PAJ-E0662		2	1.12	5.5	160	56	4		
	3PAJ-E0662		3	1.18	6.0	195	62	4		
	10PAJ-E0662		7	1.53	8.5	365	98	6		
	12PAJ-E0662	10	1.91	12.0	515	129	6			
	19PAJ-E0662	12	1.96	12.5	685	138	6			

## How to Specify & Order Plastic Tubing Bundles

**4 PJ - E 04 40 - U B**

<b>4</b>	<b>No. of Tubes</b>	<b>PJ</b>	<b>Product Design</b>	<b>E</b>	<b>Tube Material</b>
	1 = 1 Tube 2 = 2 Tube 3 = 3 Tube 4 = 4 Tube Etc...		PJ = Polymer, Jacketed  PA = Polymer, Armored  PAJ = Polymer, Armor, Jacketed  PJH = Polymer, Jacketed Heavy 3/16"		E = Polyethylene H = High Density Polyethylene  R = FR-PE N = Nylon U = Urethane P = PFA Fluoropolymer F = FEP Fluoropolymer T = TFE Fluoropolymer  9 = Customer Specified Tube Material.  All Tubes are black and number coded, except Fluoropolymer tubes which are all natural.  Colored tubes are available upon special request

<b>04</b>	<b>Tube Size (O.D.)</b>	<b>40</b>	<b>Tube Size (Wall Thickness)</b>	<b>U</b>	<b>Jacket Material</b>	<b>B</b>	<b>Jacket Color</b>
	02 = 1/8" 03 = 3/16" 04 = 1/4" 05 = 5/16" 06 = 3/8" 07 = 7/16" 08 = 1/2" 10 = 5/8" 12 = 3/4" 16 = 1"		16 = .016" 20 = .020" 28 = .028" 30 = .030" 31 = .031" 32 = .032" 35 = .035" 40 = .040" 47 = .047" 49 = .049" 50 = .050" 62 = .062" 65 = .065" 83 = .083"		V = FR-PVC T = FR-TPE U = FR-PUR P = PUR R = TPR E = FRPE L = LDPE K = PVDF  Note: Parflex standard jacket material is FR-PVC		N = Black B = Blue G = Green O = Orange Y = Yellow P = Purple R = Red W = White  Note: Parflex standard color jacket is black  For standard FR-PVC black -VN may be dropped
	Metric  MA = 2mm MB = 4mm MC = 6mm MD = 8mm ME = 10mm MF = 12mm		Metric  89 = .89mm 10 = 1.0mm 15 = 1.5mm 20 = 2.0mm 25 = 2.5mm				



## Section 5

Parflex Multitube® Instrumentation Tubing Products  
Compatibility Chart

## Ratings Code:

- G** – Good to excellent. Little or no swelling, tensile or surface changes. Preferred choice.
- L** – Marginal or conditional. Noticeable effects but not necessarily indicating lack of serviceability. Further testing suggested for specific application. Very long-term effects such as stiffening or potential for crazing should be evaluated.
- P** – Poor or unsatisfactory. Not recommended without extensive and realistic testing.
- – Indicates that this was not tested.

Materials Code for Parflex  
Multitube® Instrumentation  
Tubing Products

- E** Low Density Polyethylene
- HDPE** High Density Polyethylene
- N** Polymeric Flexible Nylon
- FRPE** Flame Resistant Polyethylene

Chemical	LDPE	HDPE	N	FRPE
Acetone	P	L	G	L
Acetyl Bromide	L	L	P	-
Acetyl Chloride	L	L	P	-
Air	G	G	G	G
Alcohols	G	G	G	G
Aluminum Salts	G	G	G	G
Ammonia	G	G	G	L
Amyl Acetate	G	G	G	-
Aniline	L	G	P	-
Animal Oils (3)	P	L	G	-
Arsenic Salts	G	G	G	G
Aromatic Hydrocarbons	P	L	G	P
Barium Salts	G	G	G	G
Benzaldehyde	P	L	L	P
Benzene	P	L	G	P
Benzyl Alcohol	P	G	L	P
Bleaching Liquors	G	L	L	-
Boric Acid Solutions	G	G	G	G
Bromine	L	L	P	-
Butane (1)	L	G	G	-
Butanol	G	G	G	G
Butyl Acetate	G	G	G	G
Calcium Hypochlorite	L	L	P	L
Calcium Salts	G	G	G	G
Carbon Dioxide	G	G	G	G
Carbon Disulfide	L	L	L	-
Carbon Tetrachloride	P	P	L	P
Caustic Potash	G	G	G	-
Caustic Soda	G	G	G	-
Chloracetic Acid	L	G	L	-
Chlorine (Dry)	L	L	P	-
Chlorine (Wet)	L	L	P	-
Chlorobenzene				
Chloroform	P	L	P	P
Chromic Acid	L	L	P	-
Copper Salts	G	G	G	G
Cresol	P	L	P	P
Cyclohexanone	L	L	L	-
Ethers	L	L	G	-
Ethyl Acetate	G	G	G	-
Ethyl Alcohol	G	G	L	G
Ethylamine	L	G	L	-
Ethyl Bromide	P	L	L	P
Ethyl Chloride	P	L	L	P
Fatty Acids	L	L	G	P
Ferric Salts	G	G	G	-
Formaldehyde	G	G	L	-
Formic Acid	G	G	P	G
Freon	L	L	G	-
Gasoline (1)	P	G	G	P
Glucose	G	G	G	G

Chemical	LDPE	HDPE	N	FRPE
Glycerin	G	G	G	G
Hydriodic Acid	L	G	P	-
Hydrochloric Acid. (Conc.)	L	G	L	-
Hydrochloric Acid. (Med. Conc.)	L	G	L	-
Hydrofluoric Acid	L	L	P	-
Hydrogen Peroxide (Conc)	L	G	L	-
Hydrogen Peroxide (Dil.)	L	G	G	-
Hydrogen Sulfide	G	G	G	-
Iodine	L	G	G	-
Kerosene (1)	L	L	G	-
Ketones	G	G	G	-
Lacquer Solvents	L	L	G	-
Lactic Acid	G	G	G	-
lead Acetate	G	G	G	-
Linseed Oil	L	G	G	-
Magnesium Salts	G	G	G	-
Naphtha	L	L	G	G
Natural Gas	L	L	G	-
Nickel Salts	G	G	G	-
Nitric Acid (Conc.)	P	L	P	G
Nitric Acid (Dil.)	P	G	L	P
Nitrobenzene	P	L	L	P
Nitrogen Oxides	L	L	L	-
Nitrous Acid	L	L	L	-
Oils (Animal and Mineral)	L	L	G	-
Oils (Vegetable)	L	L	G	-
Oxygen (2) (3)	G	G	G	G
Perchloric Acid	P	G	P	P
Phenols	P	G	P	P
Potassium Salts	G	G	G	G
Pyridine	L	L	L	-
Silver Nitrate	G	G	G	G
Soap Solutions	G	G	G	G
Sodium Salts	G	G	G	G
Stearic Acid	L	L	G	-
Sulfur Chloride	L	L	L	-
Sulfuric Acid (Conc.)	P	G	P	P
Sulfuric Acid (Dil.)	P	G	L	P
Sulfurous Acid	P	G	L	P
Tannic Acid	G	G	G	-
Tanning Extracts	G	G	G	-
Titanium Salts	G	G	G	G
Toluene	P	L	G	P
Trichloroacetic Acid	L	L	P	-
Trichloroethylene	P	L	L	P
Turpentine	P	P	G	-
Urea	G	G	G	-
Uric Acid	G	G	G	-
Water (3)	G	G	G	G
Xylene	P	L	G	P
Zinc Chloride	G	G	G	-

**Footnotes for Fluid Compatibility Guides:** The Fluid Compatibility Guides are simplified rating tabulations based on immersion tests at 75° F. Higher temperatures tend to reduce ratings. **Since final selection depends on pressure, fluid and ambient temperature and other factors not known to Parker Hannifin Co., no performance guarantee is expressed or implied.** Ratings do not imply compliance with specialized codes such as FDA, NSF, AGA or UL and do not cover possible fluid discoloration, taste or odor effects. For conveying foodstuffs use FDA sanctioned materials, and for potable water use NSF listed materials. For chemicals not listed, or for advice on particular applications, please consult Product Engineering, Parflex Div., Ravenna, Ohio. (1) Applications for these fluids must take into account legal and insurance regulations. This does not imply AGA or UL compliance. (2) Chemical compatibility does not imply low permeation rates. Consult the Parker factory for a recommendation for your specific requirement. (3) Does not imply NSF or FDA compliance.

## Polyethylene Tubing

### Series E: Instrument Grade—FDA, NSF Listed

#### Series EB: Ultraviolet Light Resistant

- Chemical Resistant
- Flexible
- Choice of Reel Lengths
- Low Cost
- Five Tube Sizes
- Ten Colors

Energy Products Division flexible polyethylene thermoplastic tubing is extruded from high molecular weight resin for increased dimensional stability, uniformity and long-term strength. Its resistance to environmental stress cracking greatly exceeds that of ordinary polyethylene tubing as measured by ASTM D-1693 (10% IGEPAL).

Parflex E series polyethylene tubing is available in black as well as nine coding colors, as recommended by the Instrument Society of America. Black (EB) tubing contains an ultraviolet inhibitor which is recommended for use in sunlit areas and in close proximity to high ultraviolet light sources. Ingredients of E series natural and colored tubing (except EB series) meet FDA and NSF 51/61 requirements for food contact applications. Black polyethylene FDA and NSF 51/61 tubing is available upon special request. All tubing conforms to ASTM D-1248, Type I, Class A, Category 4, Grade E5.

Suggested operating temperature range is -80°F (-62°C) to +150°F (+66°C).

## Polyethylene Tubing (cont)

### Series FRPE: Flame Resistant

Flame resistant polyethylene is manufactured from a distinctively formulated compound which meets the UL94 V-2 flame classification. It also meets the flame spread, fuel contribution and smoke density requirements of the ASTM E84-81a tunnel test. Parflex Series FRPE tubing is the preferred product for pneumatic control applications in the heating, ventilating, air conditioning, energy conservation industry. It is also suitable for use in petrochemical plants, petroleum refineries, pulp and paper mills, mines, steel mills and other industries where protection against intermittent flame and hot sparks is necessary.

Suggested operating temperature range is -85°F (-65°C) to +150°F (+66°C).

### Series HDPE: High Density

Energy Products Division Series HDPE is manufactured from high strength, high density polyethylene. This semirigid tubing is inherently resistant to most chemicals, less easily cut or damaged and has a higher burst pressure rating than series E tubing.

Suggested operating temperature range is -80°F (-62°C) to +175°F (+80°C).

## Nylon Tubing

### Series N: Flexible

Energy Products Division flexible nylon tubing is carefully made from high-grade, abrasion resistant, heat and light stabilized nylon. Resistance to stress cracking greatly exceeds that of ordinary nylon tubing. Parflex nylon also exhibits extremely low level water absorption.


Chemical resistant Parflex nylon tubing has the additional benefits of better flexibility, lighter weight and resistance to flexural fatigue. NN and NB tubing meets UL94HB flame resistance ratings in wall thicknesses of .033" and greater. Operating temperatures, depending upon conditions, are -65°F (-54°C) to +200°F (+93°C) continuous.

Available in natural (NN), red (RED), green (GRN), blue (BLU), yellow (YEL), and black (NB). Black tubing is recommended for use outdoors and in sunlit areas.

## Burst Pressure/Temperature Charts


### Polyethylene Tubing

Laboratory Grade E Series  
1/4 through 5/8 O. D. inches

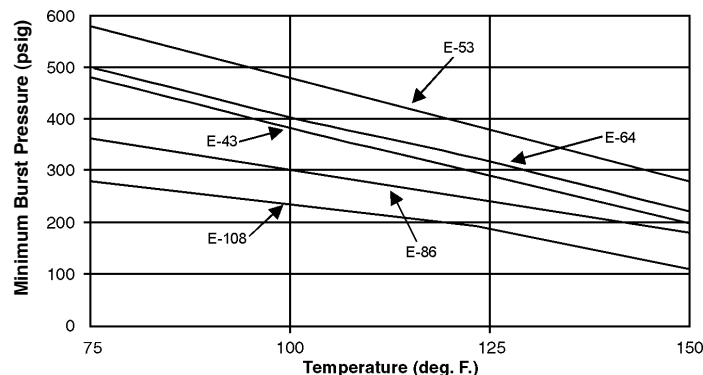


### Nylon Flexible Tubing

N Series (NN, NB)  
1/8 through 1/2 O. D. inches

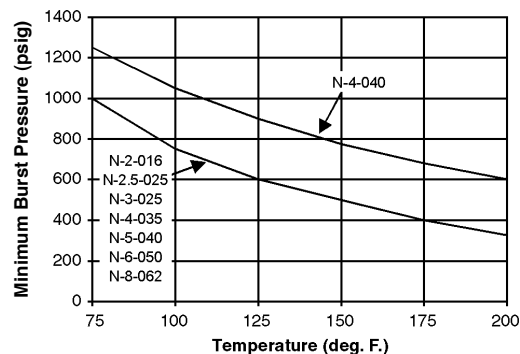


### Polyethylene Tubing

High Density HDPE Series  
1/4 through 5/8 O. D. inches

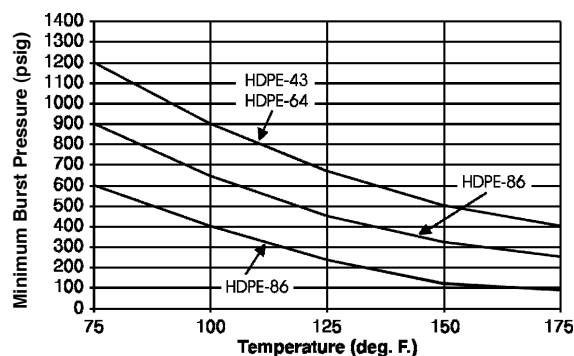


### Nylon Flexible Tubing

N Series  
1/8 through 1/2 O. D. inches

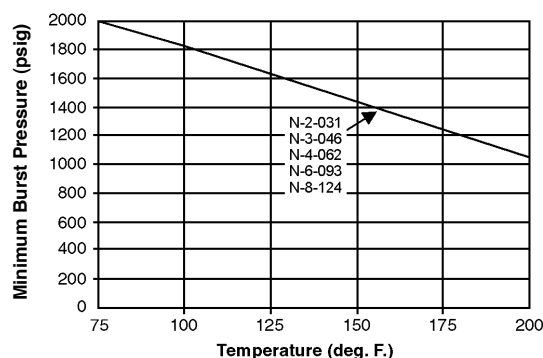

### Polyethylene Tubing

Flame Resistant FRPE Series  
5/32 through 1/2 O. D. inches

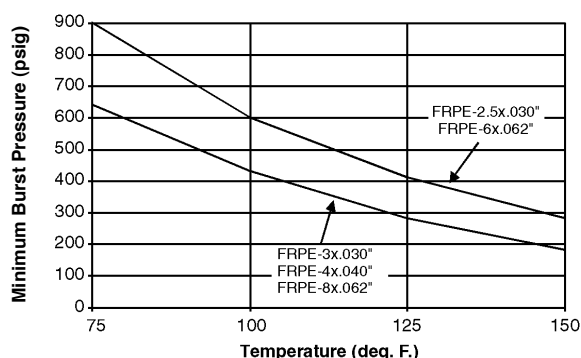

Suggested working pressures of nylon are 1/4 of burst pressure at system operating temperature.

Suggested working pressures of polyethylene are 1/4 of burst pressure at system operating temperature.

# Parflex Multitube® Instrumentation Tubing Products Compatibility Chart

## Ratings Code:

- G** – Good to excellent. Little or no swelling, tensile or surface changes. Preferred choice.
- L** – Marginal or conditional. Noticeable effects but not necessarily indicating lack of serviceability. Further testing suggested for specific application. Very long-term effects such as stiffening or potential for crazing should be evaluated.
- P** – Poor or unsatisfactory. Not recommended without extensive and realistic testing.
- – Indicates that this was not tested.

## Materials Code for Parflex Multitube® Instrumentation Tubing Products

Copper	Copper Type DHP, Alloy No. 122, Soft Annealed Bright Seamless ATM B68 and B75
316SS	Stainless Steel, Type 316 Welded and Seamless per ASTM A-269
Hastelloy	Type C-22 per ASTM 3622 and B626
Monel	Type 400 per ASTM B165

Chemical	Copper	316SS	Hastelloy C	Monel
Acetone	G	G	G	G
Acetylene	P	G	G	G
Acetyl Chloride	P	G	G	L
Air	A	A	A	A
Alcohols	L	G	G	L
Aluminum Salts	-	-	-	-
Ammonia Aqueous	P	G	L	G
Amyl Acetate	P	G	G	G
Aniline	P	L	L	L
Arsenic Acid	L	L	L	P
Barium Carbonate	G	L	L	L
Benzaldehyde	L	L	G	L
Benzene	G	L	L	L
Benzyl Alcohol	-	G	G	G
Bleach 5% Active	-	G	G	G
Boric Acid 5%	L	L	G	L
Bromine Moist Gas	P	P	G	P
Butane (1)	L	G	G	G
Butyl Acetate	G	G	G	G
Calcium Hypochlorite 2% Boiling	P	L	L	L
Calcium Chloride Saturated	P	G	L	L
Carbon Dioxide	L	G	G	G
Carbon Disulfide	P	L	L	L
Carbon Monoxide	L	G	G	G
Caustic Potash	P	P	L	L
Caustic Soda	P	L	L	L
Chloroacetic Acid	P	P	L	L
Chlorine (Dry)	P	P	P	P
Chlorine (Wet)	P	P	P	L
Chloroform	L	L	L	L
Chromic Acid Dilute	P	L	G	P
Copper Cyanide	P	L	L	L
Cresol	-	G	L	G
Cyclohexanone	-	G	G	-
Ethers	L	L	L	L
Ethyl Acetate	L	L	G	G
Ethyl Chloride Wet	L	G	L	L
Ethylamine	L	L	L	L
Ethyl Benzene	-	L	G	-
Ethyl Ether	L	L	L	L
Fatty Acids	P	G	G	L
Ferric Sulfate	P	G	L	P
Formaldehyde	L	L	L	L
Formic Acid	P	L	G	P
Freon Dry	G	G	G	L
Gasoline (1)	P	G	G	L
Glucose	G	G	-	G

Glycerin	G	G	G	G
Hydrochloric Acid. (Conc.) 40%	L	L	G	L
Hydrochloric Acid. (Conc.) 50%	L	L	G	L
Hydrofluoric Acid Boiling	P	G	P	L
Hydrogen Peroxide	L	L	G	P
Hydrogen Peroxide (Dil.)	L	G	L	G
Hydrogen Sulfide	L	G	L	L
Iodine	P	P	G	-
Kerosene (1)	G	G	G	G
Ketones	-	L	G	G
Lacquer Solvents	G	G	G	G
Lactic Acid	L	L	L	P
Lead Acetate	L	L	L	L
Linseed Oil	L	G	G	G
Magnesium Carbonate	G	G	L	G
Naphtha	L	G	L	G
Natural Gas	G	G	G	G
Nickel Sulfate	P	L	L	L
Nitric Acid	P	L	P	P
Nitric Acid Fuming >10%	P	P	P	P
Nitrobenzene	-	G	L	G
Nitrous Oxide	G	L	L	P
Nitrous Acid	P	L	G	P
Oils Animal	-	G	G	L
Oils Mineral	L	G	G	G
Oils (Vegetable)	L	G	G	G
Oxygen (2) (3)	G	G	G	G
Perchloric Acid	-	P	L	P
Phenols	-	L	G	L
Potassium Acetate	-	L	-	-
Pyridine	L	G	L	G
Silver Nitrate	P	L	L	P
Soap Solutions	L	G	G	G
Sodium Aluminate	-	G	L	L
Stearic Acid	L	G	L	L
Sulfur Chloride	P	P	G	P
Sulfur Dioxide Gas Dry	L	G	L	L
Sulfuris Trioxide	-	L	L	L
Sulfurous Acid	P	P	L	P
Tannic Acid	L	G	L	P
Tanning Liquor (Alum Solution)	-	G	L	-
Titanium Tetrachloride	L	L	L	L
Toluene	G	G	G	G
Trichloroacetic Acid	P	P	G	L
Trichloroethylene	P	L	L	L
Turpentine	L	G	L	L
Urea	-	L	L	-
Uric Acid	G	L	L	L
Water, Distilled	L	G	G	G

**Footnotes for Fluid Compatibility Guides:** The Fluid Compatibility Guides are simplified rating tabulations based on immersion tests at 75° F. Higher temperatures tend to reduce ratings. **Since final selection depends on pressure, fluid and ambient temperature and other factors not known to Parker Hannifin Co., no performance guarantee is expressed or implied.** Ratings do not imply compliance with specialized codes such as FDA, NSF, AGA or UL and do not cover possible fluid discoloration, taste or odor effects. For conveying foodstuffs use FDA sanctioned materials, and for potable water use NSF listed materials. For chemicals not listed, or for advice on particular applications, please consult Product Engineering, Parflex Div., Ravenna, Ohio. (1) Applications for these fluids must take into account legal and insurance regulations. This does not imply AGA or UL compliance. (2) Chemical compatibility does not imply low permeation rates. Consult the Parker factory for a recommendation for your specific requirement. (3) Does not imply NSF or FDA compliance.

## Material Specifications for Metal Tubing

### Tubing Pressure Rating\*§

Tubing Type	Tube Size (in.)		Tubing Pressure Rating (PSI) Versus Temperature											
	O.D.	Wall	100°F		200°F		300°F		400°F		500°F		600°F	
			Burst	Opr.	Burst	Opr.	Burst	Opr.	Burst	Opr.	Burst	Opr.	Burst	Opr.
Copper Type DHP, Alloy No. 122, Soft Annealed Bright Seamless ASTM B68 and B75	1/4	.030	7230	1450	6630	1330	5730	1150	3620	730	-	-	-	-
	3/8	.032	5040	1010	4620	930	3990	800	2520	510	-	-	-	-
	1/2	.035	4050	810	3710	750	3200	640	2020	410	-	-	-	-
	1/2	.049	5900	1180	5400	1080	4700	940	2950	590	-	-	-	-
Stainless Steel, Type 316 Welded per ASTM A-269	1/4	.035	20100	5025	20100	5025	18200	4550	16900	4225	16300	4075	15900	3975
	3/8	.035	12800	3200	12800	3200	11600	2900	10800	2700	10400	2600	10200	2550
	1/2	.035	9400	2350	9400	2350	8500	2125	7900	1975	7600	1900	7500	1875
	1/2	.049	13500	3375	13500	3375	12300	3075	11400	2850	10900	2725	10700	2675
Stainless Steel, Type 316 Seamless per ASTM A-269	1/4	.035	23650	5910	23645	5910	23300	5825	19880	4970	19180	4795	18700	4675
	3/8	.035	15060	3765	15060	3765	13640	3410	12700	3175	12240	3060	12000	3000
	1/2	.035	11060	2765	11060	2765	10000	2500	9300	2325	8940	2235	8820	2205
	1/2	.049	15880	3970	15880	3970	14480	3620	13420	3355	12820	3205	12580	3145

\*All values are nominal.

**Reference:** Pressure data for metal tubing is taken from American National Standard Code for Pressure Piping, "Power Piping, ANSI B31.1 – B30-1993A Edition." The values stated for operating (opr.) pressure are the maximum internal service pressure determined using the calculated burst pressure and an associated design factor. The equations and stress values were extracted from the above listed document.

Pressure data for Parker stainless steel tubing is derived from the relation:

$$\text{Burst Pressure} = K \frac{2st}{D-0.8t}$$

where K = efficiency of weld (0.85);  
(K = 1 for seamless)  
s = tensile strength of stainless steel (psi)  
D = tube O.D., in inches  
t = tube wall thickness in inches

The operating pressure is taken to be 25% of the burst pressure, which is a 4 to 1 design factor.

**Notes:****Copper and Stainless Tube**

§Pressure data for temperatures above 200°F are included for reference only.

Plastic coated tubing should not be used at temperatures exceeding approximately 80°C due to the PVC (or PE) jacket employed.

**Copper - Armored Tubing**

§Pressure data for temperatures above 200°F are included primarily for where the tubing must withstand higher ambient temperatures. The assembly should not be used at temperatures exceeding approximately 80°C (176°F) due to the PVC tapes and jackets employed. Consult the Division if higher temperatures will be encountered.

**Copper - Jacketed Tubing**

§Pressure data for temperatures above 200°F are included primarily for where single runs must withstand higher ambient temperatures than the Multitube bundle. The Multitube bundle should not be used at temperatures exceeding approximately 105°C due to the PVC jacket employed. Consult the Division if higher temperatures will be encountered.

**Stainless Steel - Jacketed Tubing**

§Pressure data for temperatures above 200°F are included primarily for where single runs must withstand higher ambient temperatures than the Multitube bundle. The Multitube bundle should not be used at temperatures exceeding approximately 105°C due to the PVC jacket employed. Consult the Division if higher temperatures will be encountered.

**Testing Specifications for Metal Tubing:**

All metal tubes used in the manufacture of Multitube are subject to stringent magnetic analysis using a special eddy current tester. Each tube, after eddy current analysis, is pressure tested at not less than 250 psi for 15 minutes without any sign of leakage.

When Multitube assemblies have completed the manufacturing process, each tube is again tested with dry N<sub>2</sub> at 250 psi for 5 minutes prior to shipment.

**Testing Specifications for Plastic Tubing:**

All plastic used in the manufacture of Multitube are subject to rigorous Q.A. inspection and testing prior to shipment. Each tube is pressure tested at not less than 150 psi for 15 minutes without any sign of leakage.

When Multitube assemblies have completed the manufacturing process, each tube is again tested with dry N<sub>2</sub> at 125 psi for 5 minutes prior to shipment.



## Material Specifications for Jackets:

### Flame Resistant Polyvinyl Chloride (FR PVC)

**Jacket:** Black, 105C rated, flame-resistant, corrosion-resistant thermoplastic compound with excellent low-temperature flexibility properties. Meets or exceeds ASTM D-1047, IPCEA S-19-81, IPCEA S-61-401.

**Thermoplastic Rubber (TPR) Jacket:** Black, corrosion- and weather-resistant thermoplastic rubber material.

### Flame Resistant Thermoplastic Elastomer

**(FR TPE) Jacket:** Black, flame-retarding thermoplastic elastomer compound. UL94-V-0 flame classification. Passes IEEE vertical flame test. Meets ASTM D-2671 copper mirror corrosion test standards.

**Polyurethane (PUR) Jacket:** Black, abrasion- and corrosion-resistant compound with excellent hydrolytic stability.

### Flame Resistant Polyurethane (FR PUR) Jacket:

Black, flame-retarding, abrasion- and corrosion-resistant compound which exhibits excellent low-temperature properties, hydrolysis resistance, and fungus resistance which has a UL94 flame test rating of V-0.

**Low Density Polyethylene (LDPE) Jacket:** Black, weather-resistant grade, high molecular weight, low-density compound which meets the requirements of ASTM D-1248-72 as follows: Type I, Class A, Category 4, Grade E5.

### Flame Resistant Polyethylene (FR PE) Jacket:

Black, weather-resistant, high molecular weight, flame-resistant polyethylene compound which meets the UL94 V-2 flame classification.

## Selecting a Jacket Material

Parker Multitube Instrument and Heat Trace Tubing Products are currently offered with a choice of several jacket materials. The purpose of this report is to present the main properties of the standard thermoplastics and to discuss selection factors for various Multitube products.

The following table provides a summary of the main properties of the standard jacket materials. Additional details can be provided on request to the factory.

### Current Jacket Materials for Multitube Products

	105°C FR PVC	TPR	FR TPE	PUR	FR PUR	LDPE	FRPE
Hardness, Shore A	72	92	87	90	75	50D	90
Abrasion resistance	G	G	G	E	E	G	G
Mechanical resistance	G	F	G	E	E	G	G
Max. continuous service °F	221	248	266	250	180	150	150
Low temp. brittleness °F	-41	-55	-69	-40	-90	-80	-80
Rec. min. installation °F	-35	-50	-60	-20	-70	-50	-60
<b>Environmental Resistance</b>							
Aliphatic hydrocarbons	F	P	G	G	G	G	G
Aromatic hydrocarbons	U	P	F	G	G	G	F
Halogenated solvents	U	P	P	P	P	F-P	P
Acids	F	G	E	F	F	G	G
Alkalies	F	G	E	G	G	G	E
Oils	G	F	E	G	G	E	G
Water	G	E	E	G	G	E	E
Weathering	G*	F*	E*	E*	E*	G*	G*
<b>Flamability</b>							
Oxygen index	24	NFR	24.7	NFR	26	NFR	25
UL94 vertical flame test	V-2	—	V-0	—	V-0	—	V-2
IEEE vertical tray flame test	Pass	—	Pass	—	Pass	—	Pass
Water absorption, 24 hours, %	.1	1.5	.3	1.0	1.5	.01	0.3

E = Excellent   G = Good   F = Fair   P = Poor   U = Unsatisfactory   NFR = Not flame resistant

Note: Bundles may also be armored with galvanized steel, arch-shaped, spiral wound sheet metal designed for greater crush protection and pull-apart resistance.

Please refer to product bulletins in the Instrument Tubing and Pre-Insulated Tubing section of the Multitube catalog for data on standard Multitube products utilizing the jacket materials described in this engineering report.

\*Requires carbon black for ultraviolet (U.V.) resistance.



**SEAMLESS TUBING MATERIAL PRODUCTION LIST**

Corrosion Resistant Alloys	
304	Monel 400
304L	Monel K500
316	Inconel 625
316L	Incoloy 825
317L	C22
347	C276

Heat Resistant Alloys
321
310
Alloy 718

316/L COIL LENGTHS* IMPERIAL SIZE TUBING					
Nominal Outer Diameter	Wall	Coil Length			
(in)	(in)	(ft)	(m)	lbs/ft	kg/m
0.125	0.028	6260	1908	0.030	0.045
0.125	0.035	5370	1636	0.035	0.052
0.250	0.028	2760	841	0.068	0.101
0.250	0.035	2260	688	0.083	0.124
0.250	0.049	1740	530	0.108	0.161
0.375	0.035	1410	429	0.131	0.195
0.375	0.049	1050	320	0.175	0.260
0.375	0.065	830	252	0.221	0.329
0.500	0.035	1010	307	0.178	0.265
0.500	0.049	740	225	0.242	0.360
0.500	0.065	580	176	0.310	0.461
0.625	0.035	790	240	0.226	0.336
0.625	0.049	580	176	0.309	0.460
0.625	0.065	450	137	0.398	0.592
0.750	0.049	470	143	0.376	0.560
0.750	0.065	360	109	0.487	0.725
1.000	0.065	270	82	0.665	0.990
1.000	0.083	210	64	0.832	1.238

316/L COIL LENGTHS* METRIC SIZE TUBING					
Nominal Outer Diameter	Wall	Average Coil Length			
(in)	(in)	(ft)	(m)	lbs/ft	kg/m
6.00	1.00	2230	679	0.084	0.125
6.00	1.50	1630	496	0.115	0.171
8.00	1.00	1590	484	0.118	0.176
8.00	1.50	1130	344	0.166	0.247
10.00	1.00	1210	368	0.152	0.226
10.00	1.50	850	259	0.217	0.323
12.00	1.00	1000	304	0.185	0.275
12.00	1.50	690	210	0.267	0.397
14.00	1.00	820	249	0.219	0.326
14.00	1.50	560	170	0.318	0.473
18.00	1.00	420	128	0.419	0.624
18.00	2.50	270	82	0.654	0.973
20.00	1.25	450	137	0.396	0.589
20.00	1.50	380	115	0.470	0.699

\* Contact factory for other alloy coil length packages.

## TUBE WORKING, YIELD AND BURST PRESSURE FOR SEAMLESS TUBING

### Type 316L at -20° to +100°F (-29°C to 37.8°C)

Imperial Size							
OD (in.)	Wall (in)	Nominal ID (in)	Yield Strength	Tensile Strength	Ratio	Boardmanz Yield	Boardmanz Burst
0.125	0.028	0.069	25,000	70,000	0.224	11991	56812
0.125	0.035	0.055	25,000	70,000	0.280	15202	89091
0.250	0.028	0.194	25,000	70,000	0.112	6204	21445
0.250	0.035	0.180	25,000	70,000	0.140	8540	29519
0.250	0.049	0.152	25,000	70,000	0.196	10355	45132
0.375	0.035	0.305	25,000	70,000	0.093	4872	16839
0.375	0.049	0.277	25,000	70,000	0.131	7710	26652
0.375	0.065	0.245	25,000	70,000	0.173	9039	37143
0.500	0.035	0.430	25,000	70,000	0.070	3408	11779
0.500	0.049	0.402	25,000	70,000	0.098	5190	17940
0.500	0.065	0.370	25,000	70,000	0.130	7653	26454
0.625	0.035	0.555	25,000	70,000	0.056	2621	9058
0.625	0.049	0.527	25,000	70,000	0.078	3912	13520
0.625	0.065	0.495	25,000	70,000	0.104	5614	19403
0.750	0.049	0.652	25,000	70,000	0.065	3139	10848
0.750	0.065	0.620	25,000	70,000	0.087	4432	15320
1.000	0.065	0.870	25,000	70,000	0.065	3120	10782
1.000	0.083	0.834	25,000	70,000	0.083	4198	14511

Metric Size							
OD (mm)	Wall (mm)	Nominal ID (mm)	Yield Strength	Tensile Strength	Ratio	Boardmanz Yield	Boardmanz Burst
6.00	1.00	4.01	25,000	70,000	0.165	11092	38343
6.00	1.50	3.00	25,000	70,000	0.250	13500	70000
8.00	1.00	6.02	25,000	70,000	0.124	7135	24662
8.00	1.50	5.00	25,000	70,000	0.187	9849	41929
10.00	1.00	8.03	25,000	70,000	0.099	5258	18176
10.00	1.50	7.01	25,000	70,000	0.150	9468	32726
12.00	1.00	10.01	25,000	70,000	0.083	4175	14430
12.00	1.50	8.99	25,000	70,000	0.125	7233	25000
14.00	1.00	12.01	25,000	70,000	0.071	3454	11938
14.00	1.50	11.00	25,000	70,000	0.107	5837	20176
18.00	1.00	14.99	25,000	70,000	0.083	4219	14584
18.00	2.50	13.00	25,000	70,000	0.138	8395	29019
20.00	1.25	17.50	25,000	70,000	0.062	2965	10248
20.00	1.50	16.99	25,000	70,000	0.075	3703	12799

For other alloys and temperatures, multiply the pressure shown by the following factor:

Alloy	Temperature			
	Room Temperature	300° F (148°C)	500° F (260°C)	700° F (371°C)
304L	1.00	1.00	0.89	0.81
316L	1.00	1.00	0.86	0.77
Monel 400	1.12	0.92	0.89	—
Inconel 625	2.40	2.40	2.33	2.24
Inconel 825	1.22	1.17	1.04	0.96
C-276	1.50	1.50	1.43	1.38

**SEAMLESS TUBE ANALYSES - ASTM STANDARD GRADES AVAILABLE**

Analysis	304	304L	316	316L	317L	321	347
Application	General good corrosion resistance grade	Lower carbon of 304 with good weldability	Better corrosion resistance than 304 in chloride	As for 316. Good weldability	As for 316 with increased pitting corrosion resistance	General where good weldability required with possible weld decay attack & improved high temperature properties	As for 321 but uses niobium as stabilizing element
C	.08 Max	.04 Max	.08 Max	.04 Max	.04 Max	.08 Max	.10 Max
Mn	2.00 Max	2.00 Max	2.00 Max	2.00 Max	2.00 Max	2.00 Max	2.00 Max
P	.040 Max	.040 Max	.040 Max	.040 Max	0.04 Max	.040 Max	.040 Max
S	.030 Max	.030 Max	.030 Max	.030 Max	0.03 Max	.030 Max	.030 Max
Si	.75 Max	.75 Max	.75 Max	.75 Max	.75 Max	.75 Max	.75 Max
Cr	18.0/20.0	18.0/20.0	16.0/18.0	16.0/18.0	18.0/20.0	17.0/20.0	17.0/19.0
Ni	8.0/10.5	8.0/12.0	11.0/14.0	10.0/14.0	11.0/15.0	9.0/12.0	9.0/13.0
Other	<b>N:</b> .10 <b>Mo:</b> .50 Max	<b>N:</b> .10 <b>Mo:</b> .50 Max	<b>N:</b> .10 <b>Mo:</b> 2.0/3.0	<b>N:</b> .10 <b>Mo:</b> 2.0/3.0	<b>Mo:</b> 3.0/4.0	<b>N:</b> .10 <b>Ti:</b> 5xC Min 0.70 Max	<b>Cb+Ta:</b> 10xC Min 1.0 Max

Analysis	Monel 400	Monel 500	Alloy 625	Alloy 718	Alloy 825	C276*	C22*
Application	General purpose alloy with good combination of strength, ductility & corrosion resistance	High strength, precipitation hardenable, good corrosion resistance	Very good resistance to corrosion, pitting crevice & stress corrosion.	Age hardenable, high strength up to 1300F (700C) corrosion resistance & weldability	Good resistance to stress corrosion in sulphuric/ phosphoric acid. Good general resistance.	Very good resistance to chloride sulphuric acid	
C	.30 Max	.25 Max	.10 Max	.08 Max	.05 Max	.01 Max	.015 Max
Mn	2.0 Max	1.5 Max	.50 Max	.35 Max	1.0 Max	1.00 Max	.50 Max
S	.024 Max	.01 Max	.015 Max	.015 Max	.03 Max	.03 Max	.010 Max
Si	.50 Max	.50 Max	.50 Max	.35 Max	.50 Max	.08 Max	.08 Max
Ni+Co	63.0 Max	63.0/70.0	Balance	50.0/55.0	38.0/46.0	Balance	Balance
Cr	-	-	20.0/23.0	17.0/21.0	19.5/23.5	14.5/16.5	20.0/22.5
Ti	-	.35/.85	.40 Max	.65/1.15	.60/1.2	-	-
Cb+Ta	-	-	3.15/4.15	4.75/5.50	-	-	-
Al	-	2.3/3.15	.40 Max	.20/.80	0.2	-	-
Fe	2.5 Max	2.00 Max	5.0 Max	Balance	22.0 Min	4.0/7.0	2.0/6.0
Mo	-	-	8.0/10.0	2.8/3.30	2.5/3.5	15.0/17.0	12.5/14.5
Cu	28.0/34.0	Balance	-	.30 Max	1.5/3.0	-	-
Other	-	-	<b>P:</b> .015 Max	-	-	<b>Co:</b> 2.5 Max <b>P:</b> .04 Max <b>V:</b> .35 Max <b>W:</b> 3.0/4.5	<b>Co:</b> 2.5 Max <b>P:</b> .025 Max <b>V:</b> .35 Max <b>W:</b> 2.5/3.5

## MECHANICAL PROPERTIES OF SEAMLESS TUBING

**Mechanical Properties-  
Stainless Steel\***  
(normal diameter and wall)

Alloy	Temper	Tensile Strength ksi	Yield Strength ksi	Min. Elong. in 2 inches	Rockwell Hardness
304	1	100 Max	30	35	B90 Max
	1/8 Hard	105-140	75-110	20	-
	2	125-150	85-125	15	C30 Max
	3	150 Min.	115-160	7	C40 Max
304L	1	100 Max	25	35	B90 Max
	1/8 Hard	105-140	75-110	20	-
	2	110-140	75-110	15	C25 Max
	3	140 Min.	110-150	7	C38 Max
310	1	100 Max	35	35	B95 Max
	2	115-135	70-115	15	C26 Max
	3	145 Min.	110-160	5	C38 Max
316	1	100 Max	30	35	B95 Max
	2	115-135	70-110	15	C26 Max
	3	145 Min.	105-150	6	C38 Max
316L	1	100 Max	25	35	B95 Max
	2	115-135	70-110	15	C26 Max
	3	145 Min.	105-150	6	C38 Max
321	1	105 Max	30	35	B92 Max
	2	110-135	80-115	15	C26 Max
	3	140 Min.	125-160	6	C38 Max
347	1	105 Max	30	35	B92 Max
	2	110-135	80-115	12	C26 Max
	3	140 Min.	125-160	6	C38 Max

**Mechanical Properties-  
Nickel & Nickel Base Alloys\*\***  
(normal diameter and wall)

Alloy	Temper	Tensile Strength ksi	Yield Strength ksi	Min. Elong. in 2 inches	Rockwell Hardness
Alloy 400	1	85 Max	28	32	B80 Max
	2	90-105	55-80	12	B97 Max
	3	110 Min.	90-120	3	C27 Max
Alloy 500	1	110 Max	40	28	B95 Max
	2	110-130	65-95	10	C23 Max
	3	130 Min.	90-110	4	C26 Max
Alloy 625	1	85-115	35 Min	30	B90 Max
Alloy 825	1	120 Max	60 Max	30	-
Alloy C22	1	100 Min	41 Min	40	-
Alloy C276	1	100 Min	45 Min	45	-

Note:

Temper - #1 Annealed; #2 Half Hard; #3 Full Hard

\*Properties shown above are for sizes larger than .125" and heavier than .015" wall.

\*\*Properties shown are for larger than .188" O.D. heavier than .020" wall.

In cases of dispute-Tensile strength will be considered referee.



## Parker Safety Guide for Selecting and Using Hose, Tubing, Fittings, and Related Accessories

Parker Publication No. 4400-B.1

Revised: May 2002

**WARNING:** Failure or improper selection or improper use of hose, tubing, fittings, assemblies or related accessories ("Products") can cause death, personal injury and property damage. Possible consequences of failure or improper selection or improper use of these Products include but are not limited to:

- Fittings thrown off at high speed.
- High velocity fluid discharge.
- Explosion or burning of the conveyed fluid.
- Electrocution from high voltage electric power lines.
- Contact with suddenly moving or falling objects that are controlled by the conveyed fluid.
- Injections by high-pressure fluid discharge.
- Dangerously whipping Hose.
- Contact with conveyed fluids that may be hot, cold, toxic or otherwise injurious.
- Sparking or explosion caused by static electricity buildup or other sources of electricity.
- Sparking or explosion while spraying paint or flammable liquids.
- Injuries resulting from inhalation, ingestion or exposure to fluids.

Before selecting or using any of these Products, it is important that you read and follow the instructions below. Only Hose from Parker's Stratoflex Products Division is approved for in flight aerospace applications, and no other Hose can be used for such in flight applications.

### 1.0 GENERAL INSTRUCTIONS

- 1.1 Scope:** This safety guide provides instructions for selecting and using (including assembling, installing, and maintaining) these Products. For convenience, all rubber and/or thermoplastic products commonly called "hose" or "tubing" are called "Hose" in this safety guide. All assemblies made with Hose are called "Hose Assemblies". All products commonly called "fittings" or "couplings" are called "Fittings". All related accessories (including crimping and swaging machines and tooling) are called "Related Accessories". This safety guide is a supplement to and is to be used with, the specific Parker publications for the specific Hose, Fittings and Related Accessories that are being considered for use.
- 1.2 Fail-Safe:** Hose, and Hose Assemblies and Fittings can and do fail without warning for many reasons. Design all systems and equipment in a fail-safe mode, so that failure of the Hose or Hose Assembly or Fitting will not endanger persons or property.
- 1.3 Distribution:** Provide a copy of this safety guide to each person that is responsible for selecting or using Hose and Fitting products. Do not select or use Parker Hose or Fittings without thoroughly reading and understanding this safety guide as well as the specific Parker publications for the products considered or selected.
- 1.4 User Responsibility:** Due to the wide variety of operating conditions and applications for Hose and Fittings, Parker and its distributors do not represent or warrant that any particular Hose or Fitting is suitable for any specific end use system. This safety guide does not analyze all technical parameters that must be considered in selecting a product. The user, through its own analysis and testing, is solely responsible for:
- Making the final selection of the Hose and Fitting.
  - Assuring that the user's requirements are met and that the application presents no health or safety hazards.
  - Providing all appropriate health and safety warnings on the equipment on which the Hose and Fittings are used.
  - Assuring compliance with all applicable government and industry standards.
- 1.5 Additional Questions:** Call the appropriate Parker technical service department if you have any questions or require any additional information. See the Parker publication for the product being considered or used, or call 1-800-CPARKER, or go to [www.parker.com](http://www.parker.com), for telephone numbers of the appropriate technical service department.

### 2.0 HOSE AND FITTING SELECTION INSTRUCTIONS

- 2.1 Electrical Conductivity:** Certain applications require that the Hose be nonconductive to prevent electrical current flow. Other applications require the Hose and the Fitting and the Hose/Fitting interface to be sufficiently conductive to drain off static electricity. Extreme care must be exercised when selecting Hose and Fittings for these or any other applications in which electrical conductivity or nonconductivity is a factor. The electrical conductivity or nonconductivity of Hose and Fittings is dependent upon many factors and may be susceptible to change. These factors include but are not limited to the various materials used to make the Hose and the Fittings, Fitting finish (some Fitting finishes are electrically conductive while others are nonconductive), manufacturing methods (including moisture control), how the Fittings contact the Hose, age and amount of deterioration or damage or other changes, moisture content of the Hose at any particular time, and other factors. The following are considerations for electrically nonconductive and

conductive Hose. For other applications consult the individual catalog pages and the appropriate industry or regulatory standards for proper selection.

- 2.1.1 Electrically Nonconductive Hose:** Certain applications require that the Hose be nonconductive to prevent electrical current flow or to maintain electrical isolation. For these applications that require Hose to be electrically nonconductive, including but not limited to applications near high voltage electric lines, only special nonconductive Hose can be used. The manufacturer of the equipment in which the nonconductive Hose is to be used must be consulted to be certain that the Hose and Fittings that are selected are proper for the application. Do not use any Parker Hose or Fitting for any such application requiring nonconductive Hose, including but not limited to applications near high voltage electric lines, unless (i) the application is expressly approved in the Parker technical publication for the product, (ii) the Hose is marked "nonconductive", and (iii) the manufacturer of the equipment on which the Hose is to be used specifically approves the particular Parker Hose and Fitting for such use.
- 2.1.2 Electrically Conductive Hose:** Parker manufactures special Hose for certain applications that require electrically conductive Hose. Parker manufactures special Hose for conveying paint in airless paint spraying applications. This Hose is labeled "Electrically Conductive Airless Paint Spray Hose" on its layline and packaging. This Hose must be properly connected to the appropriate Parker Fittings and properly grounded in order to dissipate dangerous static charge buildup, which occurs in all airless paint spraying applications. Do not use any other Hose for airless paint spraying, even if electrically conductive. Use of any other Hose or failure to properly connect the Hose can cause a fire or an explosion resulting in death, personal injury, and property damage. Parker manufactures a special Hose for certain compressed natural gas ("CNG") applications where static electricity buildup may occur. Parker CNG Hose assemblies comply with AGA Requirements 1-93, "Hoses for Natural Gas Vehicles and Fuel Dispensers". This Hose is labeled "Electrically Conductive for CNG Use" on its layline and packaging. This Hose must be properly connected to the appropriate Parker Fittings and properly grounded in order to dissipate dangerous static charge buildup, which occurs in, for example, high velocity CNG dispensing or transfer. Do not use any other Hose for CNG applications where static charge buildup may occur, even if electrically conductive. Use of other Hoses in CNG applications or failure to properly connect or ground this Hose can cause a fire or an explosion resulting in death, personal injury, and property damage. Care must also be taken to protect against CNG permeation through the Hose wall. See section 2.6, Permeation, for more information. Parker CNG Hose is intended for dispenser and vehicle use at a maximum temperature of 180°F. Parker CNG Hose should not be used in confined spaces or unventilated areas or areas exceeding 180°F. Final assemblies must be tested for leaks. CNG Hose Assemblies should be tested on a monthly basis for conductivity per AGA 1-93. Parker manufactures special Hose for aerospace in-flight applications. Aerospace in-flight applications employing Hose to transmit fuel, lubricating fluids and hydraulic fluids require a special Hose with a conductive inner tube. This Hose for in-flight applications is available only from Parker's Stratoflex Products Division. Do not use any other Parker Hose for in-flight applications, even if electrically conductive. Use of other Hoses for in-flight applications or failure to properly connect or ground this Hose can cause a fire or an explosion resulting in death, personal injury, and property

- damage. These Hose assemblies for in-flight applications must meet all applicable aerospace industry, aircraft engine, and aircraft requirements.
- 2.2 Pressure:** Hose selection must be made so that the published maximum recommended working pressure of the Hose is equal to or greater than the maximum system pressure. Surge pressures or peak transient pressures in the system must be below the published maximum working pressure for the Hose. Surge pressures and peak pressures can usually only be determined by sensitive electrical instrumentation that measures and indicates pressures at millisecond intervals. Mechanical pressure gauges indicate only average pressures and cannot be used to determine surge pressures or peak transient pressures. Published burst pressure ratings for Hose is for manufacturing test purposes only and is no indication that the Product can be used in applications at the burst pressure or otherwise above the published maximum recommended working pressure.
- 2.3 Suction:** Hoses used for suction applications must be selected to insure that the Hose will withstand the vacuum and pressure of the system. Improperly selected Hose may collapse in suction application.
- 2.4 Temperature:** Be certain that fluid and ambient temperatures, both steady and transient, do not exceed the limitations of the Hose. Temperatures below and above the recommended limit can degrade Hose to a point where a failure may occur and release fluid. Properly insulate and protect the Hose Assembly when routing near hot objects (e.g. manifolds). Do not use any Hose in any application where failure of the Hose could result in the conveyed fluids (or vapors or mist from the conveyed fluids) contacting any open flame, molten metal, or other potential fire ignition source that could cause burning or explosion of the conveyed fluids or vapors.
- 2.5 Fluid Compatibility:** Hose Assembly selection must assure compatibility of the Hose tube, cover, reinforcement, and Fittings with the fluid media used. See the fluid compatibility chart in the Parker publication for the product being considered or used. This information is offered only as a guide. Actual service life can only be determined by the end user by testing under all extreme conditions and other analysis. Hose that is chemically compatible with a particular fluid must be assembled using Fittings and adapters containing likewise compatible seals.
- 2.6 Permeation:** Permeation (that is, seepage through the Hose) will occur from inside the Hose to outside when Hose is used with gases, liquid and gas fuels, and refrigerants (including but not limited to such materials as helium, diesel fuel, gasoline, natural gas, or LPG). This permeation may result in high concentrations of vapors which are potentially flammable, explosive, or toxic, and in loss of fluid. Dangerous explosions, fires, and other hazards can result when using the wrong Hose for such applications. The system designer must take into account the fact that this permeation will take place and must not use Hose if this permeation could be hazardous. The system designer must take into account all legal, government, insurance, or any other special regulations which govern the use of fuels and refrigerants. Never use a Hose even though the fluid compatibility is acceptable without considering the potential hazardous effects that can result from permeation through the Hose Assembly. Permeation of moisture from outside the Hose to inside the Hose will also occur in Hose assemblies, regardless of internal pressure. If this moisture permeation would have detrimental effects (particularly, but not limited to refrigeration and air conditioning systems), incorporation of sufficient drying capacity in the system or other appropriate system safeguards should be selected and used.
- 2.7 Size:** Transmission of power by means of pressurized fluid varies with pressure and rate of flow. The size of the components must be adequate to keep pressure losses to a minimum and avoid damage due to heat generation or excessive fluid velocity.
- 2.8 Routing:** Attention must be given to optimum routing to minimize inherent problems (kinking or flow restriction due to Hose collapse, twisting of the Hose, proximity to hot objects or heat sources).
- 2.9 Environment:** Care must be taken to insure that the Hose and Fittings are either compatible with or protected from the environment (that is, surrounding conditions) to which they are exposed. Environmental conditions including but not limited to ultraviolet radiation, sunlight, heat, ozone, moisture, water, salt water, chemicals, and air pollutants can cause degradation and premature failure.
- 2.10 Mechanical Loads:** External forces can significantly reduce Hose life or cause failure. Mechanical loads which must be considered include excessive flexing, twist, kinking, tensile or side loads, bend radius, and vibration. Use of swivel type Fittings or adapters may be required to insure no twist is put into the Hose. Unusual applications may require special testing prior to Hose selection.
- 2.11 Physical Damage:** Care must be taken to protect Hose from wear, snagging, kinking, bending smaller than minimum bend radius, and cutting, any of which can cause premature Hose failure. Any Hose that has been kinked or bent to a radius smaller than the minimum bend radius, and any Hose that has been cut or is cracked or is otherwise damaged, should be removed and discarded.
- 2.12 Proper End Fitting:** See instructions 3.2 through 3.5. These recommendations may be substantiated by testing to industry standards such as SAE J517 for hydraulic applications, or MIL-A-5070, AS1339, or AS3517 for Hoses from Parker's Stratoflex Products Division for aerospace applications.
- 2.13 Length:** When establishing a proper Hose length, motion absorption, Hose length changes due to pressure, and Hose and machine tolerances and movement must be considered.
- 2.14 Specifications and Standards:** When selecting Hose and Fittings, government, industry, and Parker specifications and recommendations must be reviewed and followed as applicable.
- 2.15 Hose Cleanliness:** Hose components may vary in cleanliness levels. Care must be taken to insure that the Hose Assembly selected has an adequate level of cleanliness for the application.
- 2.16 Fire Resistant Fluids:** Some fire resistant fluids that are to be conveyed by Hose require use of the same type of Hose as used with petroleum base fluids. Some such fluids require a special Hose, while a few fluids will not work with any Hose at all. See instructions 2.5 and 1.5. The wrong Hose may fail after a very short service. In addition, all liquids but pure water may burn fiercely under certain conditions, and even pure water leakage may be hazardous.
- 2.17 Radiant Heat:** Hose can be heated to destruction without contact by such nearby items as hot manifolds or molten metal. The same heat source may then initiate a fire. This can occur despite the presence of cool air around the Hose.
- 2.18 Welding or Brazing:** When using a torch or arc welder in close proximity to hydraulic lines, the hydraulic lines should be removed or shielded with appropriate fire resistant materials. Flame or weld spatter could burn through the Hose and possibly ignite escaping fluid resulting in a catastrophic failure. Heating of plated parts, including Hose Fittings and adapters, above 450°F (232°C) such as during welding, brazing, or soldering may emit deadly gases.
- 2.19 Atomic Radiation:** Atomic radiation affects all materials used in Hose assemblies. Since the long-term effects may be unknown, do not expose Hose assemblies to atomic radiation.
- 2.20 Aerospace Applications:** The only Hose and Fittings that may be used for in-flight aerospace applications are Hose available from Parker's Stratoflex Products Division. Do not use any other Hose or Fittings for in-flight applications. Do not use any Hose or Fittings from Parker's Stratoflex Products Division with any other Hose or Fittings, unless expressly approved in writing by the engineering manager or chief engineer of Stratoflex Products Division and verified by the user's own testing and inspection to aerospace industry standards.
- 2.21 Unlocking Couplings:** Ball locking couplings or other couplings with disconnect sleeves can unintentionally disconnect if they are dragged over obstructions or if the sleeve is bumped or moved enough to cause disconnect. Threaded couplings should be considered where there is a potential for accidental uncoupling.
- 3.0 HOSE AND FITTING ASSEMBLY AND INSTALLATION INSTRUCTIONS**
- 3.1 Component Inspection:** Prior to assembly, a careful examination of the Hose and Fittings must be performed. All components must be checked for correct style, size, catalog number, and length. The Hose must be examined for cleanliness, obstructions, blisters, cover looseness, kinks, cracks, cuts or any other visible defects. Inspect the Fitting and sealing surfaces for burrs, nicks, corrosion or other imperfections. Do NOT use any component that displays any signs of nonconformance.
- 3.2 Hose and Fitting Assembly:** Do not assemble a Parker Fitting on a Parker Hose that is not specifically listed by Parker for that Fitting, unless authorized in writing by the engineering manager or chief engineer of the appropriate Parker division. Do not assemble a Parker Fitting on another manufacturer's Hose or a Parker Hose on another manufacturer's Fitting unless (i) the engineering manager or chief engineer of the appropriate Parker division approves the Assembly in writing or that combination is expressly approved in the appropriate Parker literature for the specific Parker product, and (ii) the user verifies the Assembly and the application through analysis and testing. For Parker Hose that does not specify a Parker Fitting, the user is solely responsible for the selection of the proper Fitting and Hose Assembly procedures. See instruction 1.4. The Parker published instructions must be followed for assembling the Fittings on the Hose. These instructions are provided in the Parker Fitting catalog for the specific Parker Fitting being used, or by calling 1-800-CPARKER, or at [www.parker.com](http://www.parker.com).



- 3.3 Related Accessories:** Do not crimp or swage any Parker Hose or Fitting with anything but the listed swage or crimp machine and dies in accordance with Parker published instructions. Do not crimp or swage another manufacturer's Fitting with a Parker crimp or swage die unless authorized in writing by the engineering manager or chief engineer of the appropriate Parker division.
- 3.4 Parts:** Do not use any Parker Fitting part (including but not limited to socket, shell, nipple, or insert) except with the correct Parker mating parts, in accordance with Parker published instructions, unless authorized in writing by the engineering manager or chief engineer of the appropriate Parker division.
- 3.5 Reusable/Permanent:** Do not reuse any field attachable (reusable) Hose Fitting that has blown or pulled off a Hose. Do not reuse a Parker permanent Hose Fitting (crimped or swaged) or any part thereof. Complete Hose Assemblies may only be reused after proper inspection under section 4.0. Do not assemble Fittings to any previously used hydraulic Hose that was in service, for use in a fluid power application.
- 3.6 Pre-Installation Inspection:** Prior to installation, a careful examination of the Hose Assembly must be performed. Inspect the Hose Assembly for any damage or defects. Do NOT use any Hose Assembly that displays any signs of nonconformance.
- 3.7 Minimum Bend Radius:** Installation of a Hose at less than the minimum listed bend radius may significantly reduce the Hose life. Particular attention must be given to preclude sharp bending at the Hose to Fitting juncture. Any bending during installation at less than the minimum bend radius must be avoided. If any Hose is kinked during installation, the Hose must be discarded.
- 3.8 Twist Angle and Orientation:** Hose Assembly installation must be such that relative motion of machine components does not produce twisting.
- 3.9 Securement:** In many applications, it may be necessary to restrain, protect, or guide the Hose to protect it from damage by unnecessary flexing, pressure surges, and contact with other mechanical components. Care must be taken to insure such restraints do not introduce additional stress or wear points.
- 3.10 Proper Connection of Ports:** Proper physical installation of the Hose Assembly requires a correctly installed port connection insuring that no twist or torque is transferred to the Hose when the Fittings are being tightened or otherwise during use.
- 3.11 External Damage:** Proper installation is not complete without insuring that tensile loads, side loads, kinking, flattening, potential abrasion, thread damage, or damage to sealing surfaces are corrected or eliminated. See instruction 2.10.
- 3.12 System Checkout:** All air entrapment must be eliminated and the system pressurized to the maximum system pressure (at or below the Hose maximum working pressure) and checked for proper function and freedom from leaks. Personnel must stay out of potential hazardous areas while testing and using.
- 3.13 Routing:** The Hose Assembly should be routed in such a manner so if a failure does occur, the escaping media will not cause personal injury or property damage. In addition, if fluid media comes in contact with hot surfaces, open flame, or sparks, a fire or explosion may occur. See section 2.4.
- 3.14 Ground Fault Equipment Protection Devices (GFEPDs):**  
**⚠ WARNING! Fire and shock hazard.** To minimize the danger of fire if the heating cable is damaged or improperly installed, use a Ground Fault Equipment Protection Device. Electrical fault currents may be insufficient to trip a conventional circuit breaker.  
**3.14a Ground Fault Protection:** The IEEE standard (515-1989) for heating cables recommends the use of GFEPDs with a nominal 30 milliampere trip level for "piping systems in classified areas, those areas requiring a high degree of maintenance, or which may be exposed to physical abuse or corrosive atmospheres."
- 4.0 HOSE AND FITTING MAINTENANCE AND REPLACEMENT INSTRUCTIONS**
- 4.1** Even with proper selection and installation, Hose life may be significantly reduced without a continuing maintenance program. The severity of the application, risk potential from a possible Hose failure, and experience with any Hose failures in the application or in similar applications should determine the frequency of the inspection and the replacement for the Products so that Products are replaced before any failure occurs. A maintenance program must be established and followed by the user and, at minimum, must include instructions 4.2 through 4.7.
- 4.2 Visual Inspection Hose/Fitting:** Any of the following conditions require immediate shut down and replacement of the Hose Assembly:
- Fitting slippage on Hose,
  - Damaged, cracked, cut or abraded cover (any reinforcement exposed);
  - Hard, stiff, heat cracked, or charred Hose;
  - Cracked, damaged, or badly corroded Fittings;
  - Leaks at Fitting or in Hose;
  - Kinked, crushed, flattened or twisted Hose; and
  - Blistered, soft, degraded, or loose cover.
- 4.3 Visual Inspection All Other:** The following items must be tightened, repaired, corrected or replaced as required:
- Leaking port conditions;
  - Excess dirt buildup;
  - Worn clamps, guards or shields; and
  - System fluid level, fluid type, and any air entrapment.
- 4.4 Functional Test:** Operate the system at maximum operating pressure and check for possible malfunctions and leaks. Personnel must avoid potential hazardous areas while testing and using the system. See section 2.2.
- 4.5 Replacement Intervals:** Hose assemblies and elastomeric seals used on Hose Fittings and adapters will eventually age, harden, wear and deteriorate under thermal cycling and compression set. Hose Assemblies and elastomeric seals should be inspected and replaced at specific replacement intervals, based on previous service life, government or industry recommendations, or when failures could result in unacceptable downtime, damage, or injury risk. See section 1.2.
- 4.6 Hose Inspection and Failure:** Hydraulic power is accomplished by utilizing high-pressure fluids to transfer energy and do work. Hoses, Fittings, and Hose Assemblies all contribute to this by transmitting fluids at high pressures. Fluids under pressure can be dangerous and potentially lethal and, therefore, extreme caution must be exercised when working with fluids under pressure and handling the Hoses transporting the fluids. From time to time, Hose Assemblies will fail if they are not replaced at proper time intervals. Usually these failures are the result of some form of misapplication, abuse, wear, or failure to perform proper maintenance. When Hoses fail, generally the high-pressure fluids inside escape in a stream which may or may not be visible to the user. Under no circumstances should the user attempt to locate the leak by "feeling" with their hands or any other part of their body. High-pressure fluids can and will penetrate the skin and cause severe tissue damage and possibly loss of limb. Even seemingly minor hydraulic fluid injection injuries must be treated immediately by a physician with knowledge of the tissue damaging properties of hydraulic fluid. If a Hose failure occurs, immediately shut down the equipment and leave the area until pressure has been completely released from the Hose Assembly. Simply shutting down the hydraulic pump may or may not eliminate the pressure in the Hose Assembly. Many times check valves, etc., are employed in a system and can cause pressure to remain in a Hose Assembly even when pumps or equipment are not operating. Tiny holes in the Hose, commonly known as pinholes, can eject small, dangerously powerful but hard to see streams of hydraulic fluid. It may take several minutes or even hours for the pressure to be relieved so that the Hose Assembly may be examined safely. Once the pressure has been reduced to zero, the Hose Assembly may be taken off the equipment and examined. It must always be replaced if a failure has occurred. Never attempt to patch or repair a Hose Assembly that has failed. Consult the nearest Parker distributor or the appropriate Parker division for Hose Assembly replacement information. Never touch or examine a failed Hose Assembly unless it is obvious that the Hose no longer contains fluid under pressure. The high-pressure fluid is extremely dangerous and can cause serious and potentially fatal injury.
- 4.7 Elastomeric Seals:** Elastomeric seals will eventually age, harden, wear and deteriorate under thermal cycling and compression set. Elastomeric seals should be inspected and replaced.
- 4.8 Refrigerant Gases:** Special care should be taken when working with refrigeration systems. Sudden escape of refrigerant gases can cause blindness if the escaping gases contact the eye and can cause freezing or other severe injuries if it contacts any other portion of the body.
- 4.9 Compressed Natural Gas (CNG):** Parker CNG Hose Assemblies should be tested after installation and before use, and at least on a monthly basis per AGA 1-93 Section 4.2 "Visual Inspection Hose/Fitting". The recommended procedure is to pressurize the Hose and check for leaks and to visually inspect the Hose for damage.
- 4.10** Matches, candles, open flame or other sources of ignition shall not be used for Hose inspection. Leak check solutions should be rinsed off after use.



[illegible]

## Aerospace

### Key Markets

- Commercial transports
- Military aircraft
- Regional transports
- Aircraft engines
- Business and general aviation

### Key Products

- Flight control systems and components
- Hydraulic systems and components
- Fuel systems and components
- Pneumatic systems and components
- Inert oxygen generating systems
- Fluid metering, delivery and atomization devices
- Wheels and brakes
- Couplings, fittings, hoses and tubes



## Automation

### Key Markets

- Factory automation
- Transportation and automotive
- Life sciences and medical
- Machine tools
- Semiconductor and electronics

### Key Products

- Pneumatic motion and control
- Air preparation
- Vacuum controls and sensors
- Electromechanical stepper and servo motors, drives, and controls
- Human machine interface
- Electric actuators, gantry robots, slides and linear motors
- Structural extrusion



## Climate & Industrial Controls

### Key Markets

- Refrigeration and air conditioning
- Transportation/mobile
- Process
- Industrial machinery
- Medical/life sciences
- Fuel cells
- Precision cooling

### Key Products

- Pressure regulators
- Check, ball and service valves
- Value-added systems
- Thermostatic and expansion valves
- Electronic controllers
- Contaminant controls
- Heating/air conditioning hose
- Gerotors



## Filtration

### Key Markets

- Industrial machinery
- Process
- Mobile
- Marine
- Oil & gas
- Power generation and energy
- Transportation
- Food and beverage

### Key Products

- Hydraulic, lubrication and coolant filters
- Process, chemical, water and microfiltration filters
- Compressed air and gas purification filters
- Condition monitoring
- Analytical gas generators
- Nitrogen, hydrogen and zero air generators
- Engine air, fuel, oil filtration and systems



## Fluid Connectors

### Key Markets

- Construction machinery
- Agriculture
- Transportation
- Mobile
- Industrial machinery
- Oil & gas

### Key Products

- Rubber and thermoplastic hose
- Industrial hose
- Tube fittings and adaptors
- Tubing and plastic fittings
- Brass fittings and valves
- Hose couplings
- Quick disconnects



## Hydraulics

### Key Markets

- Construction machinery
- Agriculture
- Industrial machinery
- Oil & gas
- Truck hydraulics
- Power generation and energy

### Key Products

- Hydraulic cylinders and accumulators
- Hydraulic valves and controls
- Hydraulic motors and pumps
- Power take-offs
- Hydraulic systems



## Instrumentation

### Key Markets

- Power generation
- Oil & gas
- Petrochemical
- Microelectronics
- Biopharmaceutical

### Key Products

- Medium/high pressure fittings and valves
- Instrumentation fittings, valves, manifolds and regulators
- High purity fittings, valves and regulators
- Fluoropolymer fittings, valves, pumps and regulators
- Analytical systems



## Seal

### Key Markets

- Transportation
- Energy, oil & gas
- Semiconductor
- Aerospace
- Fluid power
- Life sciences
- Telecommunications

### Key Products

- Elastomeric O-rings
- Homogeneous and inserted elastomeric shapes and diaphragms
- Metal and plastic retained composite seals
- Polymeric and plastic dynamic seals
- Rubber and plastic boots/bellows
- Extruded and precision-cut/fabricated elastomeric seals
- Thermoplastic engineered seals





---

**Parker Hannifin Corp.  
Energy Products Division**

11151 Cash Road  
Stafford, TX 77477  
(office) 281-566-4500  
(fax) 281-582-5271  
[contact.epd@parker.com](mailto:contact.epd@parker.com)  
[www.parkerepd.com](http://www.parkerepd.com)

**Multitube Business Unit**  
1300 North Freedom Street  
Ravenna, OH 44266  
(330) 296-2871

Catalog 4200-M-2 INST